

LEDVANCE EXIT SIGN

Installation Instructions

EDGE LIT EXIT SIGN

LEDVANCE'S Edge Lit Exit Sign is a sleek aluminum finish with selectable red or green letters for an all-in-one package. Low power consumption and modern aesthetics make it a great combination for any exit and emergency lighting project.



For warranty coverage, please register at www.ledvance.com/en-us/warranty

⚠ WARNING

Please Read All Instructions Before Attempting Installation

- FAILURE TO FOLLOW THESE INSTRUCTIONS AND WARNINGS MAY RESULT IN DEATH, SERIOUS INJURY OR SIGNIFICANT PROPERTY DAMAGE. For your protection, read and follow these warnings and instructions carefully before installing or maintaining this equipment. These instructions do not attempt to cover all installation and maintenance situations.
- RISK OF FIRE. Lamps are hot. Keep combustible material away from hot parts. Observe lamp manufacture' s warnings, recommendations and restrictions on lamp operation and maintenance. Make sure lamps are correctly installed
- RISK OF ELECTRIC SHOCK- NEVER CONNECT TO DISCONNECT FROM OR SERVICE WHILE EQUIPMENT IS ENERGIZED.
- Do not use outdoors. Suitable for use in -4°F to 104°F (-20°C to 40°C) damp locations.
- Consult local building code for approved wiring and installation.
- Disconnect AC power before servicing and installation.
- Do not mount near gas or electric heaters.
- Do not use this equipment for anything other than its intended use.
- The use of accessory equipment not recommended by the manufacturer will void product listing and warranty and may cause an unsafe condition.
- Any service on this equipment should be performed by qualified personnel only.
- Equipment should be mounted in locations and at heights where it will not be subject to tampering by unauthorized personnel.
- Use caution when servicing batteries.
- Cap unused wires with enclosed wire nuts or other approved method.
- Make sure wire terminations are secure, and leads are properly tucked in appropriate wire channels.
- Initially, battery in this unit may not be fully charged. After electricity is connected, allow for a minimum of 24 hours for battery to recharge fully.

Safety Precautions:

IMPORTANT:

READ CAREFULLY BEFORE INSTALLING THE FIXTURE. RETAIN FOR FUTURE REFERENCE.

GENERAL:

Upon receipt of the fixture, thoroughly inspect for any freight damage which should be brought to the attention of the delivery carrier.

List of Parts Included

- 1x Luminaire
- 1x mounting accessory kit


Maintenance

Caution: Always turn off AC power to equipment before servicing. Servicing should only be performed by a qualified Electrician, Use only Manufacturer supplied replacement parts.


Battery Supplied requires no maintenance.

Trouble Shooting Checklist


- Check your power source.
- Check electrical connections
- The battery may not be fully charged. After electricity is connected to the unit, let it charge for at least 24 hours, then normal operation should take effect. To check, press TEST button. The unit should turn on.

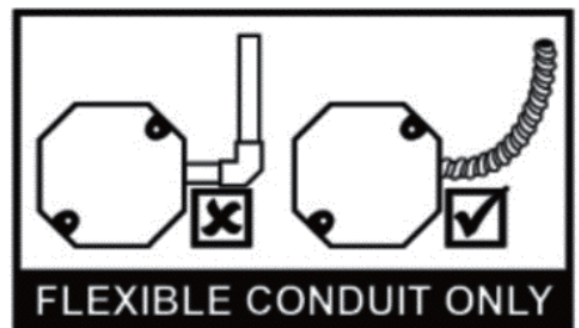


Installation- Top Mount

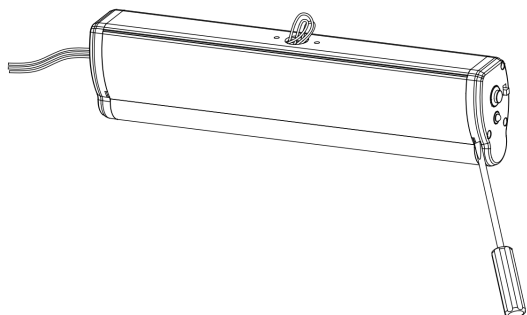


1. Pry open the side cover of the lamp body with a screwdriver.

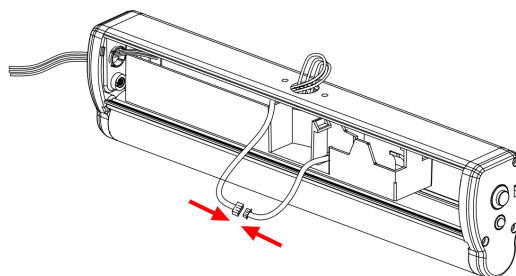


2. Connect the battery terminal wire to the PCB terminal wire.

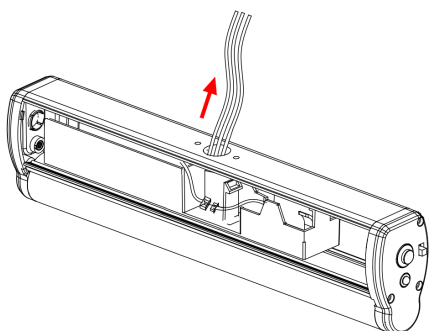


3. Move the lamp input wire from the side to the top.

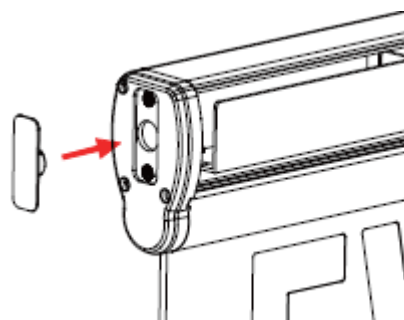

4. Insert the side plugs from the accessory pack into the lamp body.

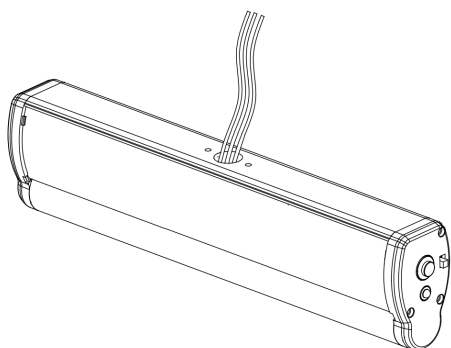


5. Close the side cover panel.

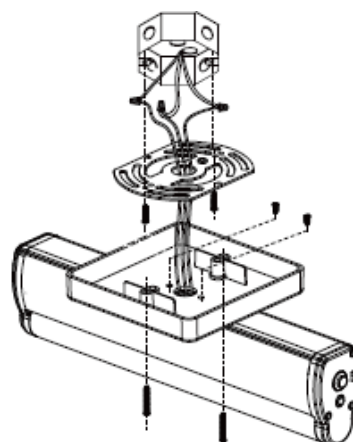


6. Connect the wiring and install the lamps.


Installation – Top Mount Cont.

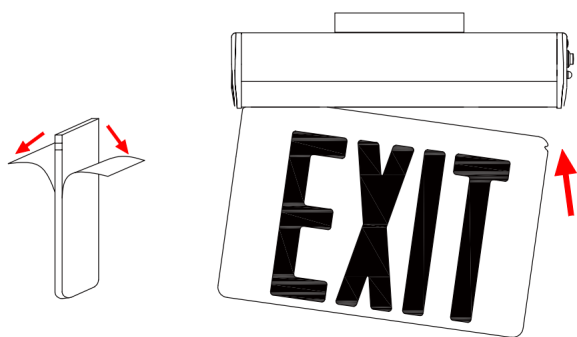

7. Remove the protective film from the light guide plate and insert the light guide plate into the lamp body.

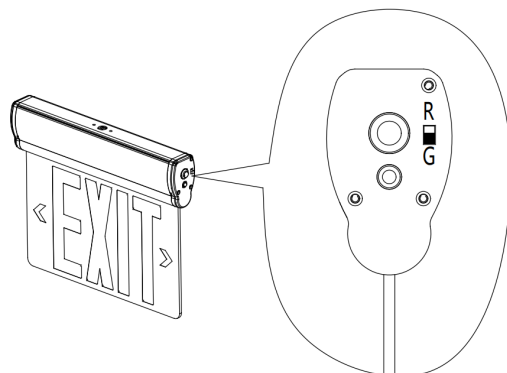


8. Switch between red and green light on the side of the lamp body according to the installation scenario.

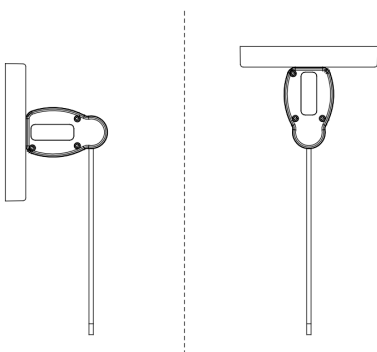


9. Adjust the angle of the light guide plate according to the installation scenario.

Installation – Side Mount

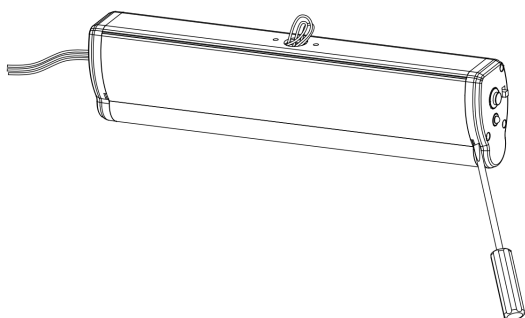


1. Pry open the cover of the lamp body with a screwdriver.

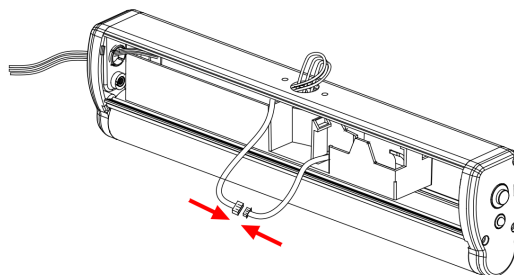


2. Connect the battery terminal wire to the PCB terminal wire.


Installation- Side Mount Cont.

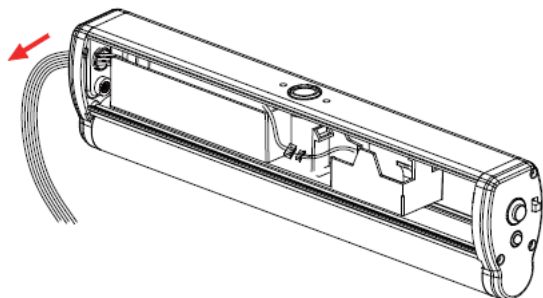


3. Lead all the lamp input wire out the side.

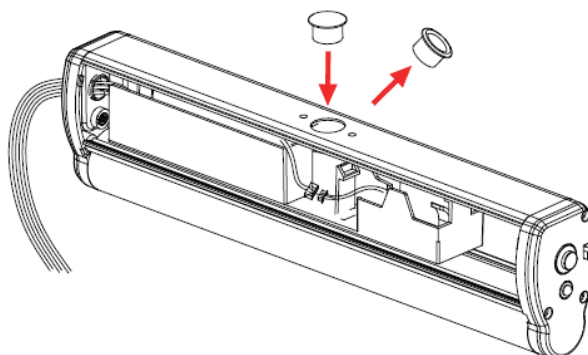

4. Remove the protective coil, and insert the plug in the socket at the top of the lamp body from the accessory package.

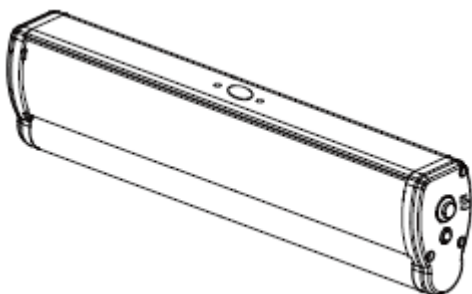


5. Close the cover panel.

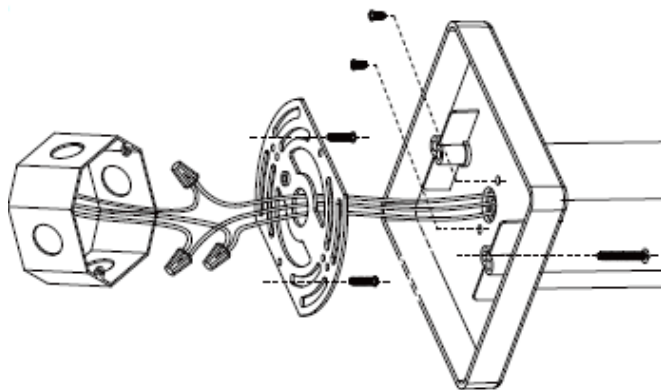

6. Connect the wiring and install the lamps.




7. Remove the protective film from the light guide plate and insert the light guide plate into the lamp body.

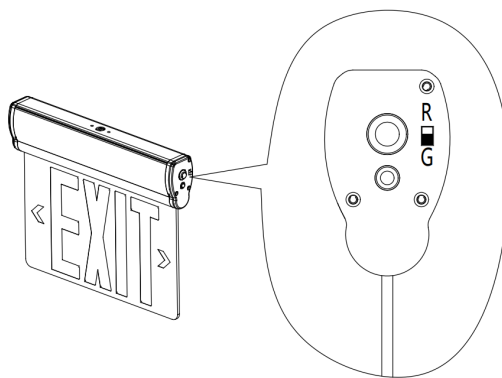

8. Switch between red and green lights on the side of the lamp according to the installation scenario.

Installation- Side Mount Cont.

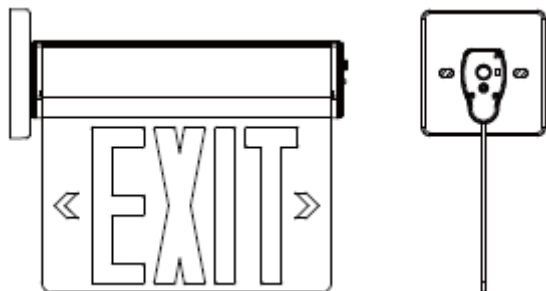

9. Adjust the angle of the light guide plate according to the installation scenario.