

PRODUCT DATASHEET

SST MR11 20 36° 3.2 W/2700K GU4

LED SUPERSTAR MR11 12 V | Low-voltage LED reflector lamps MR11 with retrofit pin base



AREAS OF APPLICATION

- Display cabinets and shop windows
- Museums, art galleries
- Hospitality
- Residential interiors
- As a downlight for marking walkways, doors, stairs, etc.
- Outdoor applications only in suitable luminaires

PRODUCT BENEFITS

- Low energy consumption
- Easy relamping thanks to compact design and GU4 base
- Instant 100 % light, no warm-up time
- Very good color rendering ($R_a \geq 90$)

PRODUCT FEATURES

- Professional LED alternative to halogen MR11 lamps
- Dimmable (with many common dimmers, see also www.ledvance.com/dim)
- Mercury-free lamps



TECHNICAL DATA

Electrical data

Rated wattage	3.20 W
Nominal wattage	3.20 W
Nominal voltage	12 V
Claimed equiv. conventional lamp power	20 W
Max. lamp no. on circuit break. 10 A (B)	30
Max. lamp no. on circuit break. 16 A (B)	48
Operating frequency	50...60 Hz
Power factor λ	0.95


Photometrical data

Luminous intensity [PIM]	400 cd
Nominal luminous flux	184 lm
Rated luminous flux	184 lm
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Luminous flux	184 lm
Color rendering index Ra	≥ 90
Standard deviation of color matching	≤ 6 sdc
Rated color temperature	2700 K
Color rendering index Ra	≥ 90
Nominal useful luminous flux 90°	184 lm
Rated useful luminous flux 90°	184 lm
Rated peak intensity	400 cd

Light technical data

Beam angle	36 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s
Nominal beam angle	36 °
Rated beam angle (half peak value)	36.00 °

Dimensions & weight



Overall length	38.0 mm
Diameter	35.0 mm
Outer bulb	MR35
Length	38.0 mm
Maximum diameter	35.0 mm

Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	85 °C

Lifespan

Nominal lamp life time	25000 h
Rated lamp life time	25000 h
Number of switching cycles	100000

Additional product data

Base (standard designation)	GU4
Mercury content	0.0 mg
Mercury-free	Yes
Show WEEE picto	Yes
Product remark	All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

Capabilities

Dimmable	Yes
-----------------	-----


Certificates & standards

Energy efficiency class	A+
Energy consumption	4 kWh/1000h

Country-specific categorizations

ILCOS	DRR-3,3/827-12-GU4-35/36
Order reference	LSMR11D2036 3,2

Light Distribution

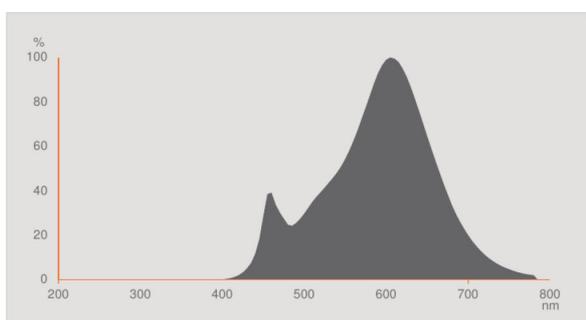

Spectral power distribution

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075264021	Blister 1	42 mm x 140 mm x 120 mm	31.00 g	0.71 dm ³
4058075264038	Shipping carton box 6	261 mm x 153 mm x 136 mm	294.00 g	5.43 dm ³
4058075433083	Folding carton box 1	34 mm x 49 mm x 95 mm	27.00 g	0.16 dm ³
4058075433090	Shipping carton box 10	189 mm x 109 mm x 104 mm	324.00 g	2.14 dm ³
4058075452947	Shipping carton box 80	- x - x -		

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For dimming conformity see

- ▶ www.ledvance.com/dim

For further products and actual information concerning LED lamps see

- ▶ www.ledvance.com/ledlamps

For Guarantee see

- ▶ www.ledvance.com/guarantee

Further information see

- ▶ www.ledvance.com/low-voltage-ledlamps

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.