


PRODUCT DATASHEET

ENDURA GARDEN 18 Dot 12W

ENDURA GARDEN DOT | Decorative light dots for outdoor use

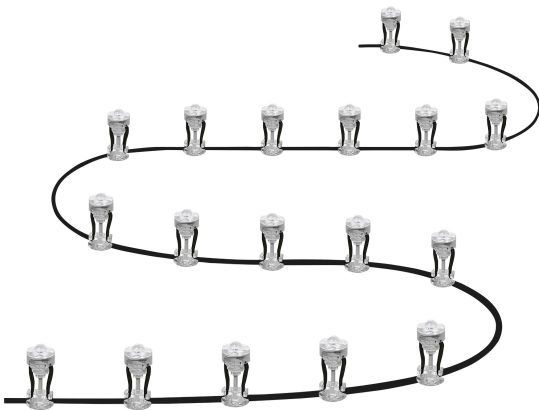

TECHNICAL DATA

Electrical data

Nominal wattage	12.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Power factor λ	> 0.5
Protection class	II
Operating mode	Mains voltage

Photometrical data

Luminous flux	680 lm
Luminous efficacy	57 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	≥ 80
Standard deviation of color matching	≤ 6 sdcn
Beam angle	33.00 °

Dimensions & Weight

Diameter	23.00 mm
Width	23.00 mm
Height	96.00 mm
Product weight	500.00 g



Materials & Colors

Product color	Clear
Body material	Polycarbonate (PC)
Cover material	Polycarbonate (PC)
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Type of connection	Plug type C (EU)
Type of protection	IP65
Dimmable	No
Mounting type	Ground spike
Mounting location	Ground
LED module replaceable	Not replaceable

Lifespan

Lifespan L70/B50 at 25 °C	25000 h
Number of switching cycles	12500

Certificates & Standards

Standards	CE / EAC / REACH / RoHS
-----------	-------------------------

DOWNLOAD DATA

DOWNLOAD DATA	
	User instruction ENDURA GARDEN DOT
	Tender documents Tender Text 4058075478473

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075478473	Folding box 1	152 mm x 122 mm x 124 mm	557.00 g	2.30 dm ³
4058075478480	Shipping box 4	327 mm x 267 mm x 150 mm	2600.00 g	13.10 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.