


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: LED Flush mount	TYPE:	WEIGHT:1
SPEC.:SPSCL-K25DSUE 5CBW259	DIM.: 16"	SERIAL No.:1
MFR.: 江西索普信实业有限公司	SUR.:0.36	Shielding Angle:0

DATA OF LAMP		PHOTOMETRIC DATA Eff: 66.29 lm/W			
MODEL:USHSTRN16R1700UD9SC3ME		Imax(cd)	398.9	S/MH(C0/180)	1.22
NOMINAL POWER(W)	25	LOR(%)	101.5	S/MH(C90/270)	1.34
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1775.8	η UP,DN(C0-180)	9.4,41.3
NOMINAL FLUX(lm)	1750	CIE CLASS	SEMI-D.	η UP,DN(C180-360)	9.4,41.3
LAMPS INSIDE	1	η up(%)	18.9	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120	η down(%)	82.6	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

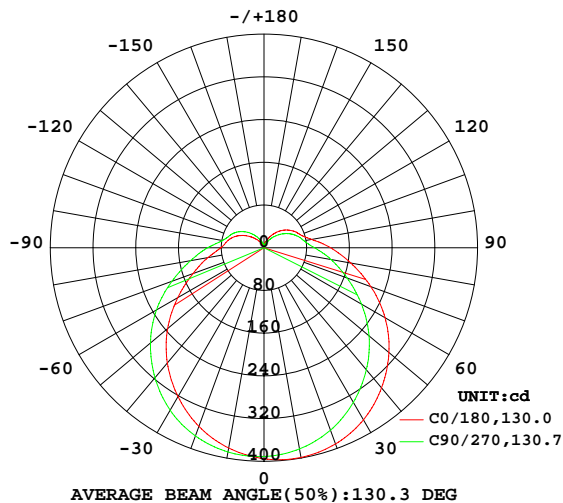

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

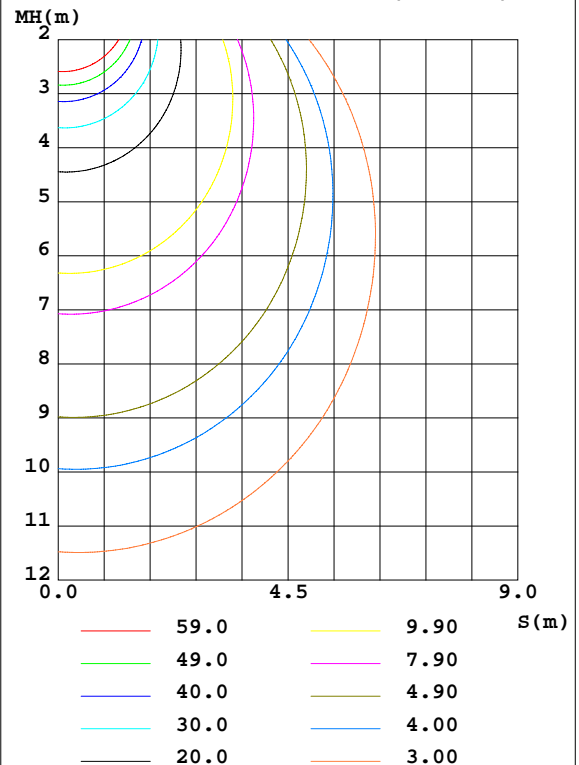

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:WEN
 Test Date:2021-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity:65.0%
 Test Distance:8.978m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	398.6	390.9	382.5	378.0	380.7	382.7	388.3	393.2	0- 10	37.17	37.17	2.09,2.12
20	391.1	378.7	363.6	354.7	356.1	363.2	375.1	384.4	10- 20	107.3	144.5	8.14,8.26
30	372.4	355.5	334.5	322.3	321.9	332.6	351.4	364.9	20- 30	165.4	310.0	17.5,17.7
40	342.5	322.7	298.3	284.0	281.6	294.4	317.7	335.0	30- 40	205.2	515.1	29,29.4
50	305.2	284.1	256.8	240.0	235.7	250.4	277.5	297.5	40- 50	223.5	738.6	41.6,42.2
60	261.8	240.1	210.7	192.7	186.3	201.9	232.3	253.7	50- 60	219.9	958.5	54,54.8
70	212.9	192.1	165.8	149.4	141.5	155.1	183.4	204.9	60- 70	196.9	1155	65.1,66
80	165.1	148.3	127.7	114.0	106.9	117.7	139.7	157.4	70- 80	163.0	1318	74.2,75.3
90	124.7	111.8	94.44	85.77	80.98	86.92	105.8	119.2	80- 90	127.4	1446	81.4,82.6
100	90.75	83.27	76.17	73.40	70.44	70.27	79.27	87.96	90-100	96.81	1543	86.9,88.2
110	72.34	70.73	65.68	61.90	59.94	61.32	68.22	71.92	100-110	76.27	1619	91.2,92.5
120	63.08	60.06	53.12	47.63	46.24	50.26	58.82	63.56	110-120	60.70	1680	94.6,96
130	51.81	47.24	39.21	32.82	31.99	37.59	46.81	52.27	120-130	44.09	1724	97.1,98.5
140	38.96	33.67	25.54	19.86	19.33	24.63	33.58	38.95	130-140	27.89	1752	98.6,100
150	25.39	20.75	14.51	11.61	11.07	14.45	21.10	25.48	140-150	14.82	1766	99.5,101
160	14.09	11.68	8.422	6.608	6.258	8.652	12.00	14.21	150-160	6.469	1773	99.8,101
170	8.319	7.059	5.601	4.728	4.454	5.651	7.143	8.147	160-170	2.338	1775	100,101
180	5.274	5.129	5.147	5.274	5.280	5.141	5.159	5.286	170-180	0.5435	1776	100,101
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:WEN
 Test Date:2021-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity:65.0%
 Test Distance:8.978m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: LED Flush mount	TYPE:	WEIGHT:1
SPEC.:SPSCL-K25DSUE 5CBW259	DIM.: 16"	SERIAL No.:1
MFR.: 江西索普信实业有限公司	SUR.:0.36	Shielding Angle:0

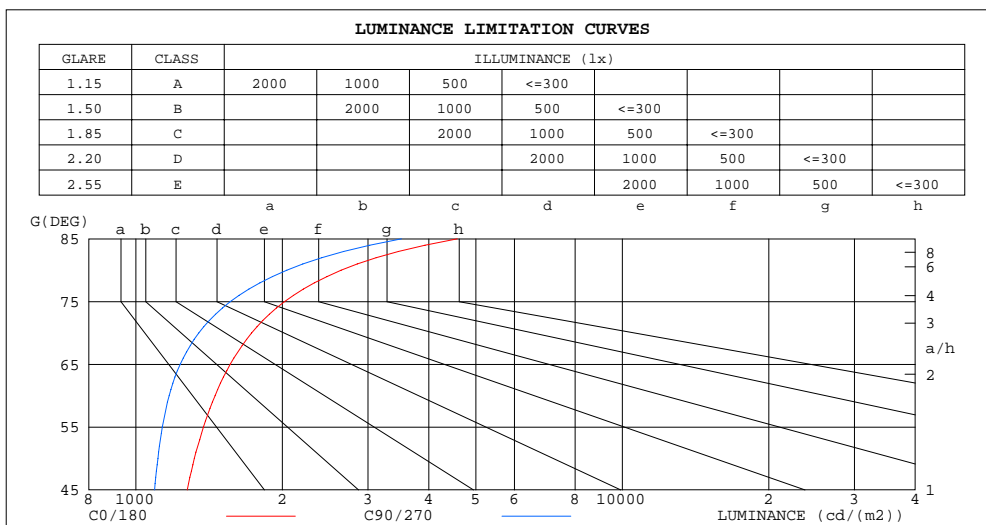

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	4580	3514
80	2641	2043
75	2022	1564
70	1729	1347
65	1563	1233
60	1455	1171
55	1377	1133
50	1319	1110
45	1275	1093


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:WEN
Test Date:2021-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.978m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED Flush mount	TYPE:	WEIGHT:1
SPEC.:SPSCL-K25DSUE 5CBW259	DIM.: 16"	SERIAL No.:1
MFR.: 江西索普信实业有限公司	SUR.:0.36	Shielding Angle:0

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.16	1.16	1.16	1.11	1.11	1.11	1.02	1.02	1.02	.94	.94	.94	.86	.86	.86	.83
1.0	.97	.92	.87	.93	.88	.84	.85	.81	.78	.78	.75	.72	.71	.69	.67	.63
2.0	.83	.75	.69	.80	.72	.66	.73	.67	.62	.67	.62	.58	.61	.57	.54	.50
3.0	.72	.63	.56	.69	.61	.54	.63	.56	.51	.58	.52	.48	.53	.48	.44	.41
4.0	.63	.54	.47	.61	.52	.45	.56	.48	.43	.51	.45	.40	.47	.42	.38	.35
5.0	.56	.47	.40	.54	.45	.39	.50	.42	.36	.46	.39	.34	.42	.37	.32	.29
6.0	.50	.41	.34	.48	.40	.33	.45	.37	.32	.41	.35	.30	.38	.32	.28	.26
7.0	.46	.36	.30	.44	.35	.29	.40	.33	.28	.37	.31	.26	.34	.29	.25	.22
8.0	.41	.33	.26	.40	.32	.26	.37	.30	.25	.34	.28	.23	.32	.26	.22	.20
9.0	.38	.29	.24	.36	.29	.23	.34	.27	.22	.31	.25	.21	.29	.24	.20	.18
10.0	.35	.27	.21	.34	.26	.21	.31	.24	.20	.29	.23	.19	.27	.22	.18	.16

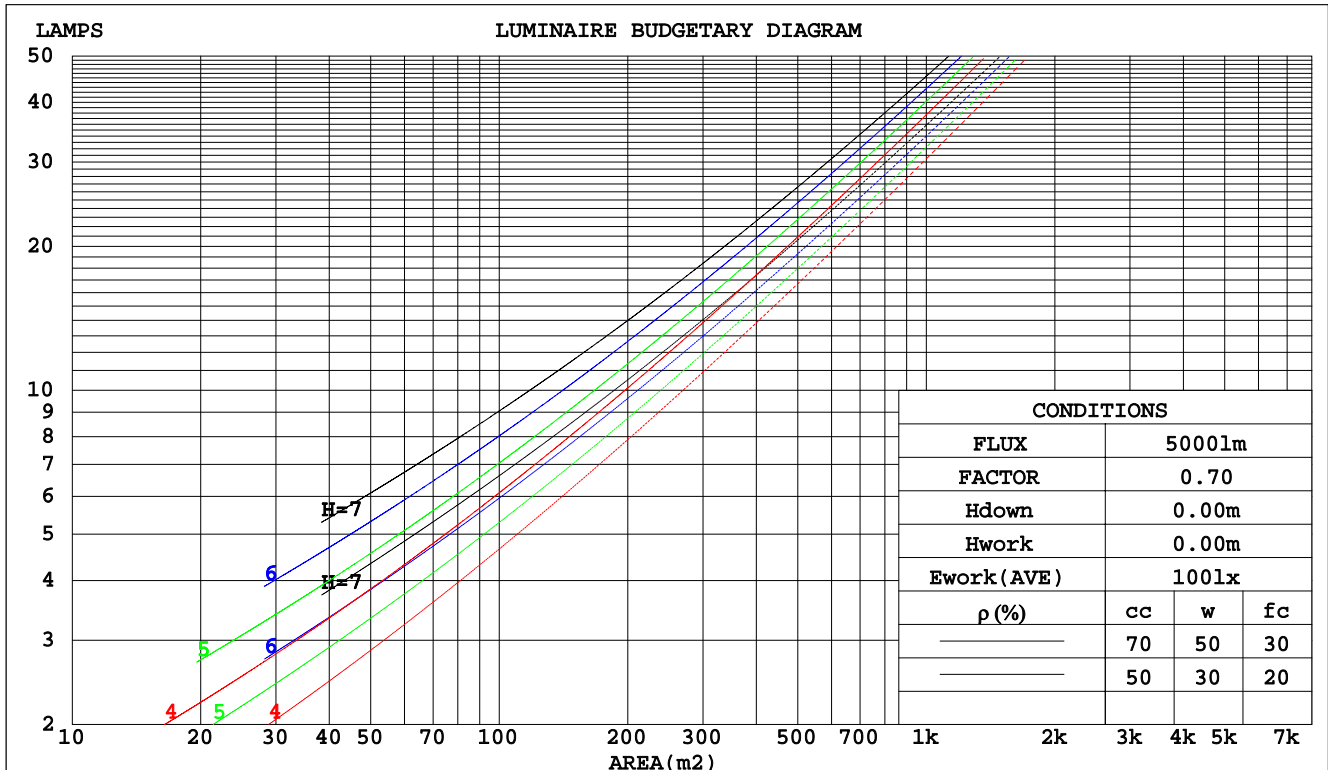

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:WEN
 Test Date:2021-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity:65.0%
 Test Distance:8.978m [K=1.0000]
 Remarks:

WEC AND CCEC

NAME: LED Flush mount	TYPE:	WEIGHT:1
SPEC.:SPSCL-K25DSUE 5CBW259	DIM.: 16"	SERIAL No.:1
MFR.: 江西索普信实业有限公司	SUR.:0.36	Shielding Angle:0

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.385	.219	.069	.372	.212	.067	.348	.200	.064	.325	.188	.060	.305	.177	.057		
2.0	.335	.183	.056	.323	.178	.055	.301	.167	.052	.280	.157	.049	.261	.148	.047		
3.0	.298	.158	.047	.287	.154	.046	.267	.145	.044	.249	.136	.042	.231	.128	.040		
4.0	.268	.139	.041	.259	.135	.040	.241	.128	.038	.224	.120	.036	.208	.113	.034		
5.0	.244	.124	.036	.235	.121	.035	.219	.114	.034	.204	.107	.032	.189	.101	.030		
6.0	.224	.112	.032	.216	.109	.031	.201	.103	.030	.187	.097	.029	.174	.091	.027		
7.0	.207	.102	.029	.199	.099	.028	.186	.094	.027	.173	.089	.026	.161	.083	.025		
8.0	.192	.094	.026	.185	.091	.026	.172	.086	.025	.161	.081	.023	.149	.077	.022		
9.0	.179	.086	.024	.173	.084	.024	.161	.080	.023	.150	.075	.022	.140	.071	.021		
10.0	.167	.080	.022	.162	.078	.022	.151	.074	.021	.141	.070	.020	.131	.066	.019		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.337	.337	.337	.288	.288	.288	.197	.197	.197	.113	.113	.113	.036	.036	.036		
1.0	.333	.303	.276	.285	.260	.237	.195	.179	.164	.112	.103	.095	.036	.033	.031		
2.0	.326	.279	.241	.279	.241	.208	.191	.166	.145	.110	.097	.085	.035	.031	.028		
3.0	.318	.263	.219	.273	.227	.190	.187	.157	.133	.108	.092	.078	.035	.030	.026		
4.0	.310	.250	.204	.266	.216	.177	.183	.151	.125	.106	.088	.074	.034	.029	.024		
5.0	.302	.240	.194	.260	.208	.169	.179	.145	.119	.104	.085	.071	.033	.028	.023		
6.0	.295	.232	.187	.254	.201	.163	.175	.141	.115	.101	.083	.068	.033	.027	.023		
7.0	.288	.225	.182	.248	.195	.158	.171	.137	.112	.099	.081	.067	.032	.026	.022		
8.0	.281	.220	.178	.242	.191	.155	.167	.134	.110	.097	.079	.065	.032	.026	.022		
9.0	.275	.215	.174	.237	.186	.152	.164	.131	.108	.096	.077	.064	.031	.025	.021		
10.0	.269	.211	.172	.232	.183	.150	.161	.129	.107	.094	.076	.064	.030	.025	.021		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:WEN
Test Date:2021-03-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.978m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: LED Flush mount					TYPE:					WEIGHT:1				
SPEC.:SPSCL-K25DSUE 5CBW259					DIM.: 16"					SERIAL No.:1				
MFR.: 江西索普信实业有限公司					SUR.:0.36					Shielding Angle:0				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					11.2	12.6	11.7	13.1	13.7	10.4	11.7	10.9	12.3	12.8
3H					13.6	14.8	14.1	15.4	16.0	12.5	13.8	13.0	14.3	14.9
4H					14.9	16.0	15.4	16.6	17.2	13.6	14.8	14.2	15.4	16.0
6H					16.2	17.3	16.8	17.9	18.6	14.9	16.0	15.5	16.6	17.2
8H					17.0	18.0	17.6	18.6	19.3	15.6	16.6	16.2	17.2	17.9
12H					17.8	18.9	18.4	19.5	20.2	16.3	17.4	17.0	18.0	18.7
4H 2H					11.9	13.1	12.5	13.6	14.3	11.3	12.5	11.8	13.0	13.7
3H					14.5	15.5	15.1	16.1	16.8	13.6	14.6	14.2	15.2	15.9
4H					15.9	16.9	16.5	17.5	18.2	14.9	15.8	15.5	16.5	17.2
6H					17.5	18.3	18.1	19.0	19.7	16.3	17.2	16.9	17.8	18.6
8H					18.3	19.1	19.0	19.8	20.6	17.1	17.9	17.7	18.5	19.3
12H					19.3	20.0	20.0	20.7	21.5	18.0	18.7	18.7	19.4	20.2
8H 4H					16.3	17.1	17.0	17.8	18.6	15.5	16.3	16.2	17.0	17.8
6H					18.2	18.9	18.9	19.6	20.4	17.2	17.9	17.9	18.6	19.4
8H					19.2	19.8	19.9	20.6	21.4	18.2	18.8	18.9	19.5	20.3
12H					20.5	21.0	21.2	21.7	22.6	19.3	19.8	20.0	20.6	21.4
12H 4H					16.4	17.2	17.1	17.8	18.6	15.7	16.4	16.4	17.1	17.9
6H					18.4	19.0	19.1	19.7	20.5	17.5	18.1	18.2	18.8	19.6
8H					19.5	20.1	20.3	20.8	21.6	18.6	19.1	19.3	19.8	20.7
Variations with the observer position at spacings:														
S = 1.0H					+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H					+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H					+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 1750 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 1.9$)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:WEN
Test Date:2021-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.978m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: LED Flush mount	TYPE:	WEIGHT:1
SPEC.:SPSCL-K25DSUE 5CBW259	DIM.: 16"	SERIAL No.:1
MFR.: 江西索普信实业有限公司	SUR.:0.36	Shielding Angle:0


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	49	36	29	47	36	29	46	35	28	21
0.80	58	45	37	56	44	36	53	43	35	27
1.00	66	53	44	64	52	44	60	52	42	34
1.25	73	60	52	70	59	51	66	56	49	39
1.50	78	66	57	75	64	56	70	61	54	43
2.00	85	74	66	82	72	64	76	68	61	50
2.50	90	80	72	86	77	70	80	72	66	53
3.00	94	84	77	90	82	75	83	76	71	57
4.00	98	90	84	94	87	81	87	81	76	62
5.00	101	94	89	97	91	86	89	85	80	65
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNM = 1.25										

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:WEN
 Test Date:2021-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity:65.0%
 Test Distance:8.978m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: LED Flush mount	TYPE:	WEIGHT:1
SPEC.:SPSCL-K25DSUE 5CBW259	DIM.: 16"	SERIAL No.:1
MFR.: 江西索普信实业有限公司	SUR.:0.36	Shielding Angle:0

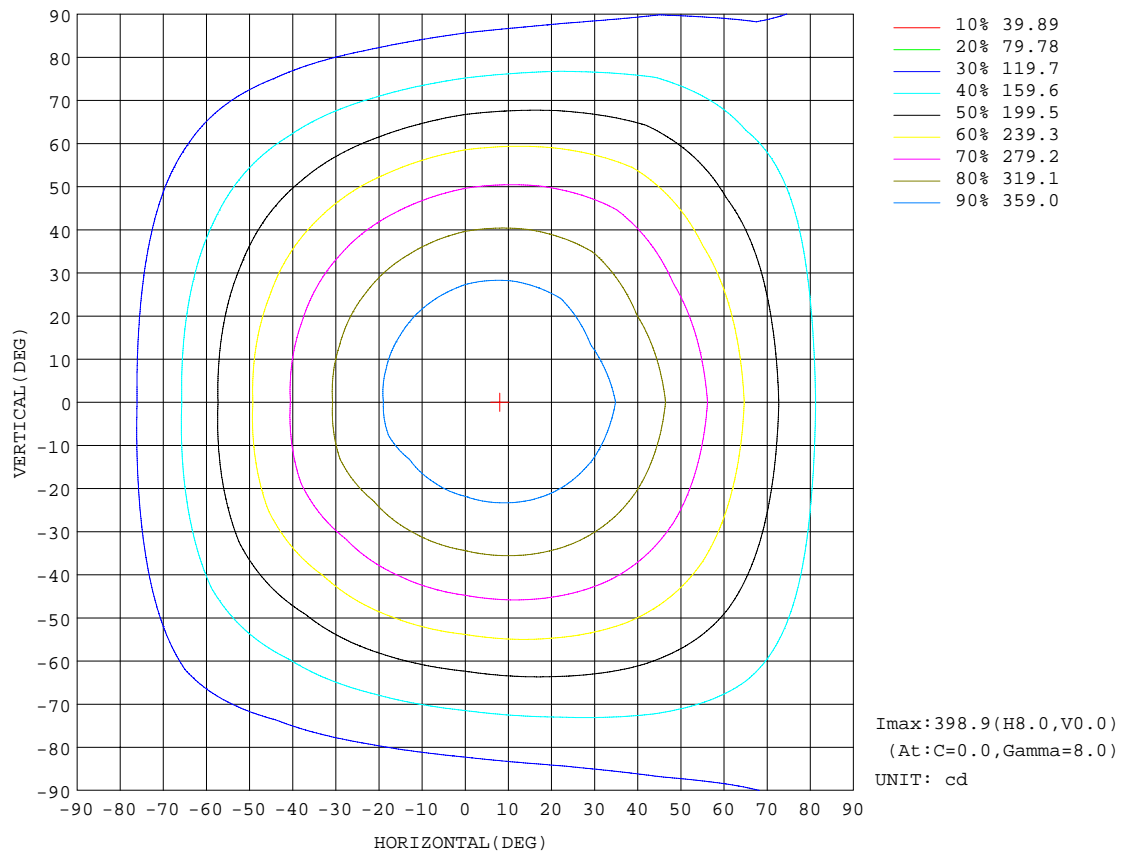


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: WEN
Test Date: 2021-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.978m [K=1.0000]
Remarks:

AAI CURVES

NAME: LED Flush mount	TYPE:	WEIGHT:1
SPEC.:SPSCL-K25DSUE 5CBW259	DIM.: 16"	SERIAL No.:1
MFR.: 江西索普信实业有限公司	SUR.:0.36	Shielding Angle:0

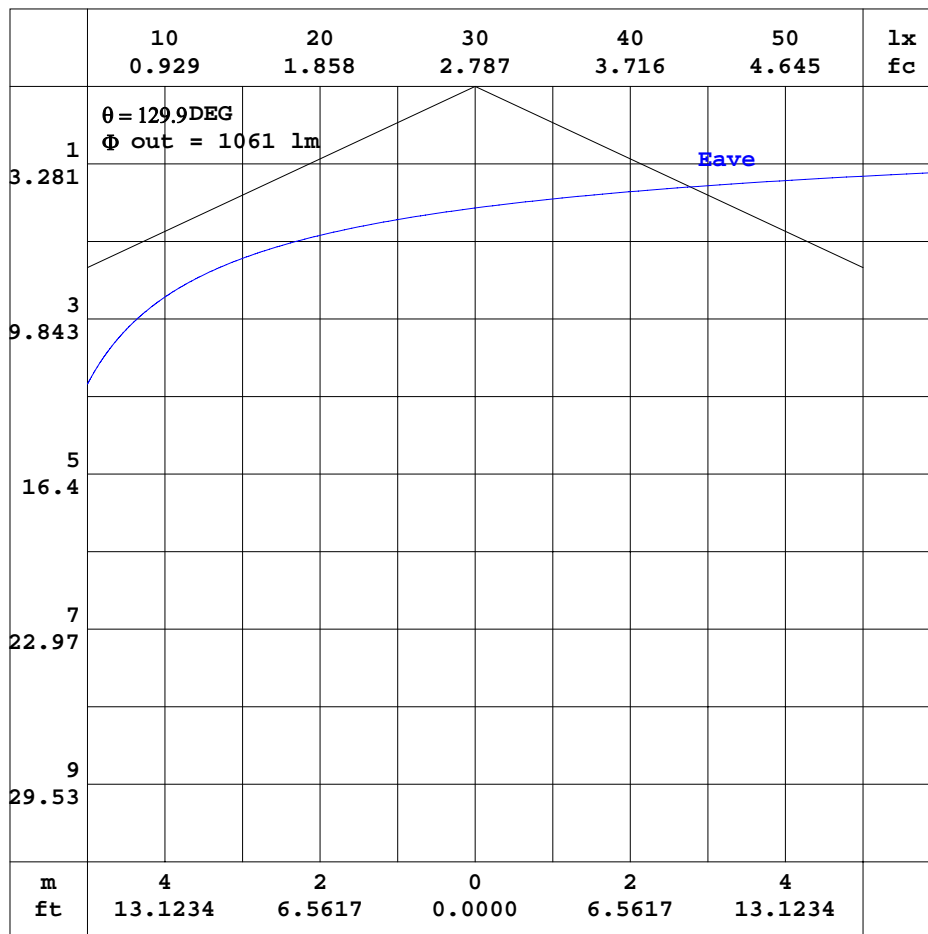


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:WEN
 Test Date:2021-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity:65.0%
 Test Distance:8.978m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: LED Flush mount	TYPE:	WEIGHT:1
SPEC.:SPSCL-K25DSUE 5CBW259	DIM.: 16"	SERIAL No.:1
MFR.: 江西索普信实业有限公司	SUR.:0.36	Shielding Angle:0

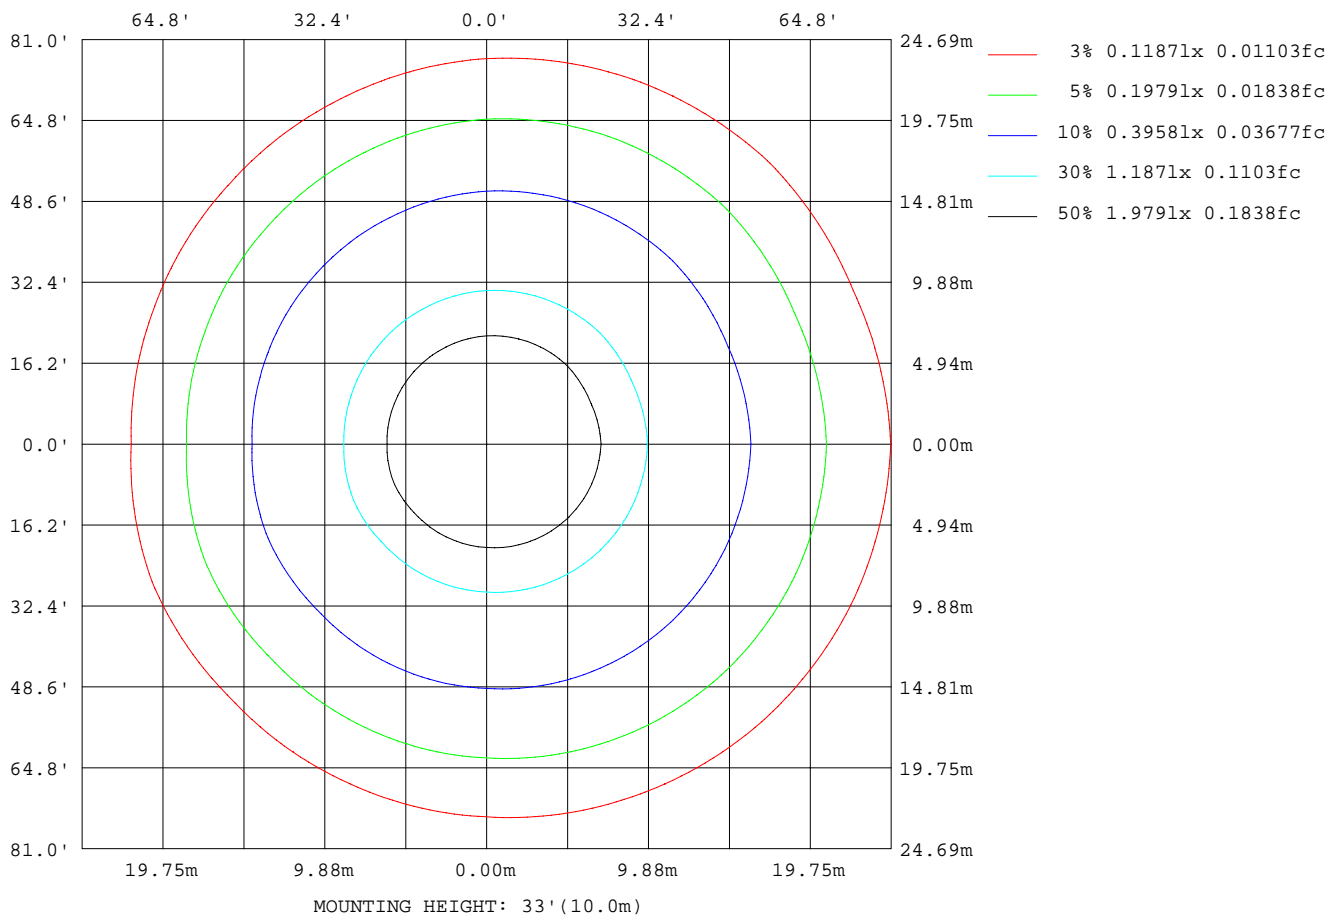

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:WEN
Test Date:2021-03-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.978m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: LED Flush mount	TYPE:	WEIGHT:1
SPEC.:SPSCL-K25DSUE 5CBW259	DIM.: 16"	SERIAL No.:1
MFR.: 江西索普信实业有限公司	SUR.:0.36	Shielding Angle:0


AvgL	cd/m2
L_0~180(65)av	1316
L_0~180(75)av	1672
L_0~180(85)av	3749
L_90~270(65)av	1300
L_90~270(75)av	1642
L_90~270(85)av	3698
L_45(65)av	1305
L_45(75)av	1653
L_45(85)av	3710

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:WEN
Test Date:2021-03-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.978m [K=1.0000]
Remarks:

Planar Illuminance Curve

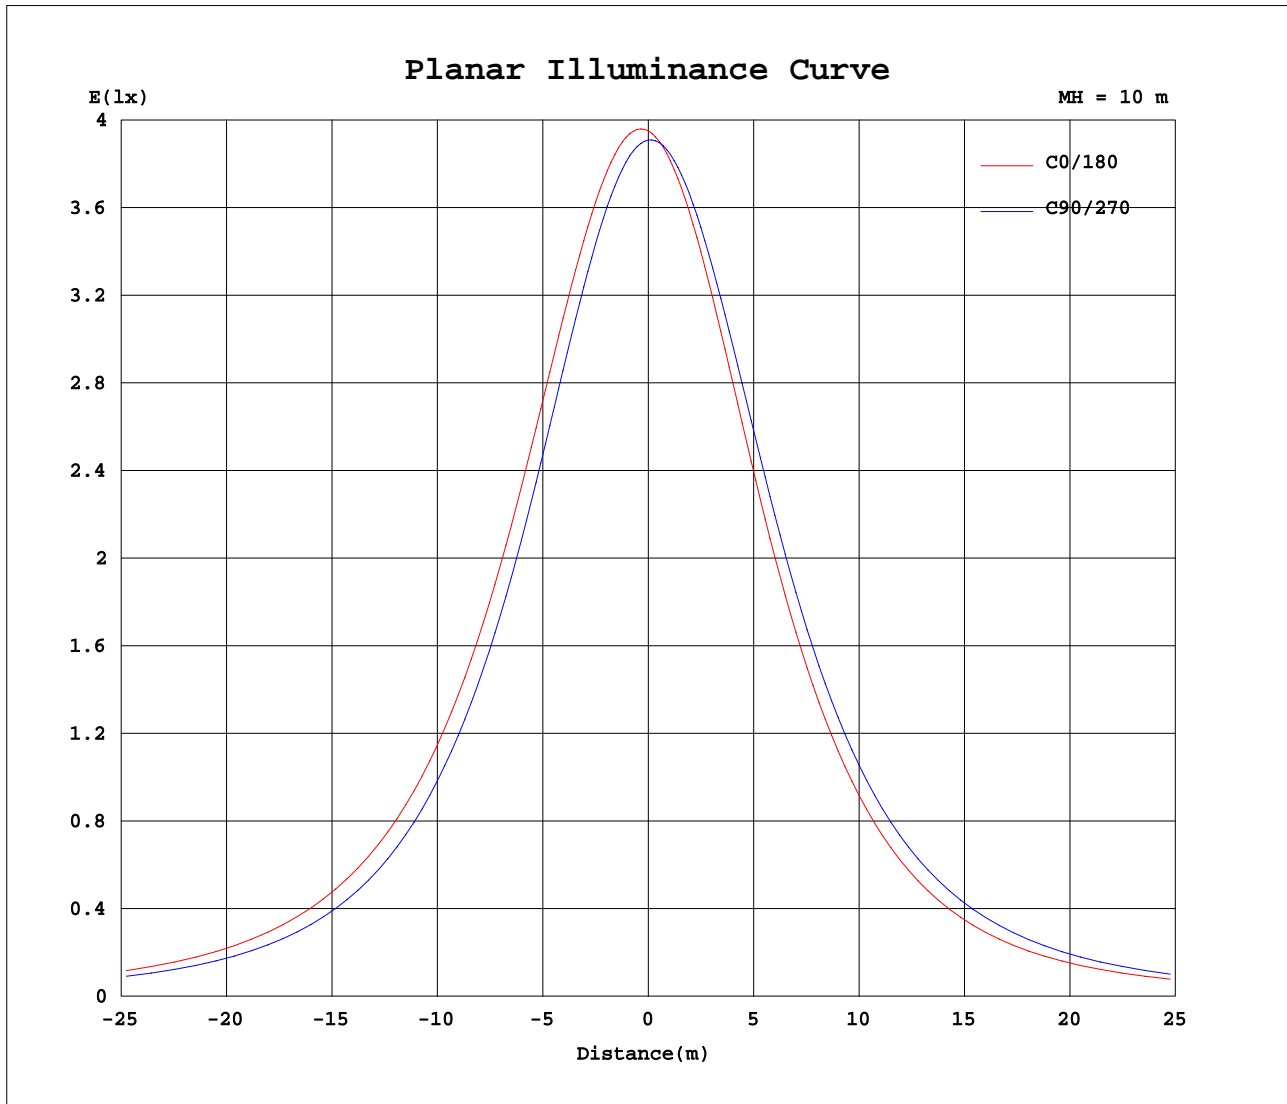

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: WEN
Test Date: 2021-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.978m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED Flush mount	TYPE:	WEIGHT:1
SPEC.:SPSCL-K25DSUE 5CBW259	DIM.: 16"	SERIAL No.:1
MFR.: 江西索普信实业有限公司	SUR.:0.36	Shielding Angle:0

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	395	393	392	391	391	391	391	392	395	393	392	391	391	391	391	392			
5	398	396	393	390	388	387	386	387	389	389	389	390	391	392	393	394			
10	399	395	391	387	383	380	378	380	381	381	383	385	388	391	393	394			
15	396	391	386	380	374	370	368	370	370	371	374	378	383	387	390	390			
20	391	385	379	371	364	359	355	357	356	359	363	369	375	380	384	384			
25	383	376	369	359	350	344	339	342	340	343	349	357	365	371	376	375			
30	372	365	355	345	335	328	322	325	322	326	333	341	351	359	365	364			
35	359	350	340	328	317	309	304	307	303	307	314	324	336	344	351	349			
40	342	334	323	310	298	290	284	287	282	286	294	305	318	327	335	333			
45	325	315	304	291	278	270	263	265	259	264	273	285	298	309	317	315			
50	305	296	284	270	257	248	240	243	236	241	250	263	278	289	298	295			
55	284	275	263	248	234	225	216	219	211	217	226	240	256	267	276	274			
60	262	252	240	225	211	201	193	195	186	192	202	216	232	244	254	251			
65	238	229	216	201	188	178	170	172	163	168	178	191	208	220	230	227			
70	213	204	192	178	166	156	149	150	142	147	155	168	183	195	205	202			
75	188	180	170	156	146	137	131	132	123	128	135	147	160	172	180	178			
80	165	158	148	137	128	120	114	115	107	111	118	128	140	150	157	155			
85	144	138	129	119	110	103	97.7	98.3	91.6	95.2	102	111	122	130	137	135			
90	125	120	112	101	94.4	89.4	85.8	85.8	81.0	82.5	86.9	95.2	106	113	119	117			
95	107	102	95.4	87.7	83.3	80.5	78.2	77.8	74.5	74.4	76.7	82.2	90.5	96.8	103	101			
100	90.7	87.7	83.3	78.3	76.2	74.9	73.4	72.7	70.4	69.4	70.3	73.5	79.3	83.5	88.0	86.2			
105	79.3	77.9	75.5	72.6	71.2	70.0	68.1	67.6	65.7	64.9	66.1	68.4	72.4	74.7	77.9	76.8			
110	72.3	72.0	70.7	67.9	65.7	64.0	61.9	61.7	59.9	59.6	61.3	64.5	68.2	69.6	71.9	71.3			
115	68.0	67.4	65.7	62.4	59.6	57.3	55.0	55.3	53.3	53.7	56.0	59.8	64.0	65.8	68.1	67.6			
120	63.1	62.1	60.1	56.5	53.1	50.2	47.6	48.4	46.2	47.4	50.3	54.4	58.8	61.2	63.6	62.9			
125	57.7	56.3	53.8	50.0	46.2	42.8	40.1	41.1	39.0	40.8	44.1	48.4	53.1	56.0	58.3	57.3			
130	51.8	50.1	47.2	43.2	39.2	35.5	32.8	33.8	32.0	34.2	37.6	42.0	46.8	50.1	52.3	51.0			
135	45.5	43.5	40.4	36.2	32.2	28.5	25.9	26.7	25.4	27.7	31.0	35.4	40.3	43.9	45.8	44.3			
140	39.0	36.7	33.7	29.5	25.5	22.1	19.9	20.3	19.3	21.5	24.6	28.9	33.6	37.2	39.0	37.5			
145	32.2	29.9	27.0	23.2	19.5	16.5	15.0	15.1	14.6	16.3	18.9	22.8	27.2	30.5	32.1	30.6			
150	25.4	23.3	20.7	17.4	14.5	12.8	11.6	11.6	11.1	12.6	14.4	17.4	21.1	23.9	25.5	24.1			
155	19.3	17.3	15.3	13.1	11.2	9.66	8.63	8.65	8.15	9.60	11.4	13.4	15.6	18.0	19.3	18.2			
160	14.1	12.8	11.7	10.0	8.42	7.30	6.61	6.57	6.26	7.31	8.65	10.4	12.0	13.3	14.2	13.3			
165	10.8	9.96	9.07	7.75	6.70	5.96	5.53	5.45	5.21	5.91	6.74	7.97	9.18	10.1	10.6	10.0			
170	8.32	7.68	7.06	6.21	5.60	5.07	4.73	4.66	4.45	5.04	5.65	6.41	7.14	7.79	8.15	7.57			
175	6.52	6.09	5.75	5.27	5.03	4.64	4.38	3.98	4.37	4.71	4.98	5.40	5.83	6.21	6.41	6.14			
180	5.27	5.11	5.13	5.15	5.15	5.20	5.27	5.14	5.28	5.12	5.14	5.15	5.16	5.19	5.29	5.12			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:WEN
Test Date:2021-03-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.978m [K=1.0000]
Remarks: