

LEDVANCE Poles

SQUARE STEEL POLES

Application

LEDVANCE square poles are offered in 12', 15', 17', 20', 25' and 30' heights and mounting configurations include tenon top, drilled for one, two, three, or four fixtures. The poles will cover all your mounting needs from flood light to area lights, ideal for parking lots, outdoor storage areas, and any open space needing illumination.

Benefits and Features

- Poles available in six heights: 12', 15', 17', 20', 25' and 30'
- 12'-25' poles are 4" square; 30' pole is 5" square
- 12'-25' poles are 11 gauge, while 30' poles are 7 gauge
- Fabricated from the highest grade structural steel

Warranty

- 5-year
- NLB Trusted Warranty Program

Specifications

- Square steel pole with powder coat paint. The standard color is bronze
- Polycarbonate spring loaded top cover
- Reinforced 2.5" x 4.5" cast iron hand-hole with ground screw included
- Easily secured base cover included
- Bolt circle template included



Catalog #	Type
Project	
Comments	
Prepared by	

Ordering Guide

POLESQS	2B	/	XX	XXG	XXIN	XXXXX	BZ	LAB
Product Name	Generation		Height	Gauge	Size	Mounting Configuration	Finish	Options
POLESQS =	2B = Generation 2B		12 = 12 feet 15 = 15 feet 17 = 17 feet 20 = 20 feet 25 = 25 feet 30 = 30 feet	11G = 11 gauge 07G = 7 gauge	4IN = 4 inches 5IN = 5 inches	TT = Tenon Top D1 = Drill 1 side D290 = Drill 2 sides @90° D2180 = Drill 2 sides @180° D3 = Drill 3 sides D4 = Drill 4 sides	BZ = Bronze	LAB = Less anchor bolts
Square Straight Pole								






Ordering Information

Item Number	Ordering Abbreviation	Shape	Height (ft)	Gauge (in)	Size (in)	Mounting Configuration	Finish	Options
63247	POLESQS2B/1211G4INTTBZ	Square Straight	12	11	4	Tenon Top	BZ	
63248	POLESQS2B/1211G4IND1BZ	Square Straight	12	11	4	Drill 1 side	BZ	
63249	POLESQS2B/1211G4IND290BZ	Square Straight	12	11	4	Drill 2 sides @ 90 degrees	BZ	
63250	POLESQS2B/1211G4IND2180BZ	Square Straight	12	11	4	Drill 2 sides @ 180 degrees	BZ	
63251	POLESQS2B/1211G4IND3BZ	Square Straight	12	11	4	Drill 3 sides	BZ	
63252	POLESQS2B/1211G4IND4BZ	Square Straight	12	11	4	Drill 4 sides	BZ	
63253	POLESQS2B/1211G4IND3BZLAB	Square Straight	12	11	4	Tenon Top	BZ	Less Anchor Bolts
63254	POLESQS2B/1211G4IND1BZLAB	Square Straight	12	11	4	Drill 1 side	BZ	Less Anchor Bolts
63255	POLESQS2B/1211G4IND290BZLAB	Square Straight	12	11	4	Drill 2 sides @ 90 degrees	BZ	Less Anchor Bolts
63256	POLESQS2B/1211G4IND2180BZLAB	Square Straight	12	11	4	Drill 2 sides @ 180 degrees	BZ	Less Anchor Bolts
63257	POLESQS2B/1211G4IND3BZLAB	Square Straight	12	11	4	Drill 3 sides	BZ	Less Anchor Bolts
63258	POLESQS2B/1211G4IND4BZLAB	Square Straight	12	11	4	Drill 4 sides	BZ	Less Anchor Bolts
63259	POLESQS2B/1511G4INTTBZ	Square Straight	15	11	4	Tenon Top	BZ	
63260	POLESQS2B/1511G4IND1BZ	Square Straight	15	11	4	Drill 1 side	BZ	
63261	POLESQS2B/1511G4IND290BZ	Square Straight	15	11	4	Drill 2 sides @ 90 degrees	BZ	
63262	POLESQS2B/1511G4IND2180BZ	Square Straight	15	11	4	Drill 2 sides @ 180 degrees	BZ	
63263	POLESQS2B/1511G4IND3BZ	Square Straight	15	11	4	Drill 3 sides	BZ	
63264	POLESQS2B/1511G4IND4BZ	Square Straight	15	11	4	Drill 4 sides	BZ	
63265	POLESQS2B/1511G4INTTBZLAB	Square Straight	15	11	4	Tenon Top	BZ	Less Anchor Bolts
63266	POLESQS2B/1511G4IND1BZLAB	Square Straight	15	11	4	Drill 1 side	BZ	Less Anchor Bolts
63267	POLESQS2B/1511G4IND290BZLAB	Square Straight	15	11	4	Drill 2 sides @ 90 degrees	BZ	Less Anchor Bolts
63268	POLESQS2B/1511G4IND2180BZLAB	Square Straight	15	11	4	Drill 2 sides @ 180 degrees	BZ	Less Anchor Bolts
63269	POLESQS2B/1511G4IND3BZLAB	Square Straight	15	11	4	Drill 3 sides	BZ	Less Anchor Bolts
63270	POLESQS2B/1511G4IND4BZLAB	Square Straight	15	11	4	Drill 4 sides	BZ	Less Anchor Bolts
63325	POLESQS2B/1711G4INTTBZ	Square Straight	17	11	4	Tenon Top	BZ	
63326	POLESQS2B/1711G4IND1BZ	Square Straight	17	11	4	Drill 1 side	BZ	
63327	POLESQS2B/1711G4IND290BZ	Square Straight	17	11	4	Drill 2 sides @ 90 degrees	BZ	
63328	POLESQS2B/1711G4IND2180BZ	Square Straight	17	11	4	Drill 2 sides @ 180 degrees	BZ	
63329	POLESQS2B/1711G4IND3BZ	Square Straight	17	11	4	Drill 3 sides	BZ	
63330	POLESQS2B/1711G4IND4BZ	Square Straight	17	11	4	Drill 4 sides	BZ	
63331	POLESQS2B/1711G4INTTBZLAB	Square Straight	17	11	4	Tenon Top	BZ	Less Anchor Bolts
63332	POLESQS2B/1711G4IND1BZLAB	Square Straight	17	11	4	Drill 1 side	BZ	Less Anchor Bolts
63333	POLESQS2B/1711G4IND290BZLAB	Square Straight	17	11	4	Drill 2 sides @ 90 degrees	BZ	Less Anchor Bolts
63334	POLESQS2B/1711G4IND2180BZLAB	Square Straight	17	11	4	Drill 2 sides @ 180 degrees	BZ	Less Anchor Bolts
63335	POLESQS2B/1711G4IND3BZLAB	Square Straight	17	11	4	Drill 3 sides	BZ	Less Anchor Bolts
63336	POLESQS2B/1711G4IND4BZLAB	Square Straight	17	11	4	Drill 4 sides	BZ	Less Anchor Bolts
63337	POLESQS2B/2011G4INTTBZ	Square Straight	20	11	4	Tenon Top	BZ	
63338	POLESQS2B/2011G4IND1BZ	Square Straight	20	11	4	Drill 1 side	BZ	
63339	POLESQS2B/2011G4IND290BZ	Square Straight	20	11	4	Drill 2 sides @ 90 degrees	BZ	
63340	POLESQS2B/2011G4IND2180BZ	Square Straight	20	11	4	Drill 2 sides @ 180 degrees	BZ	
63341	POLESQS2B/2011G4IND3BZ	Square Straight	20	11	4	Drill 3 sides	BZ	
63342	POLESQS2B/2011G4IND4BZ	Square Straight	20	11	4	Drill 4 sides	BZ	
63343	POLESQS2B/2011G4INTTBZLAB	Square Straight	20	11	4	Tenon Top	BZ	Less Anchor Bolts
63344	POLESQS2B/2011G4IND1BZLAB	Square Straight	20	11	4	Drill 1 side	BZ	Less Anchor Bolts
63345	POLESQS2B/2011G4IND290BZLAB	Square Straight	20	11	4	Drill 2 sides @ 90 degrees	BZ	Less Anchor Bolts
63346	POLESQS2B/2011G4IND2180BZLAB	Square Straight	20	11	4	Drill 2 sides @ 180 degrees	BZ	Less Anchor Bolts
63347	POLESQS2B/2011G4IND3BZLAB	Square Straight	20	11	4	Drill 3 sides	BZ	Less Anchor Bolts
63348	POLESQS2B/2011G4IND4BZLAB	Square Straight	20	11	4	Drill 4 sides	BZ	Less Anchor Bolts

Item Number	Ordering Abbreviation	Shape	Height (ft)	Gauge (in)	Size (in)	Mounting Configuration	Finish	Options
63349	POLESQS2B/2511G4INTTBZ	Square Straight	25	11	4	Tenon Top	BZ	
63350	POLESQS2B/2511G4IND1BZ	Square Straight	25	11	4	Drill 1 side	BZ	
63351	POLESQS2B/2511G4IND290BZ	Square Straight	25	11	4	Drill 2 sides @ 90 degrees	BZ	
63352	POLESQS2B/2511G4IND2180BZ	Square Straight	25	11	4	Drill 2 sides @ 180 degrees	BZ	
63353	POLESQS2B/2511G4IND3BZ	Square Straight	25	11	4	Drill 3 sides	BZ	
63354	POLESQS2B/2511G4IND4BZ	Square Straight	25	11	4	Drill 4 sides	BZ	
63355	POLESQS2B/2511G4INTTBZLAB	Square Straight	25	11	4	Tenon Top	BZ	Less Anchor Bolts
63356	POLESQS2B/2511G4IND1BZLAB	Square Straight	25	11	4	Drill 1 side	BZ	Less Anchor Bolts
63357	POLESQS2B/2511G4IND290BZLAB	Square Straight	25	11	4	Drill 2 sides @ 90 degrees	BZ	Less Anchor Bolts
63358	POLESQS2B/2511G4IND2180BZLAB	Square Straight	25	11	4	Drill 2 sides @ 180 degrees	BZ	Less Anchor Bolts
63359	POLESQS2B/2511G4IND3BZLAB	Square Straight	25	11	4	Drill 3 sides	BZ	Less Anchor Bolts
63360	POLESQS2B/2511G4IND4BZLAB	Square Straight	25	11	4	Drill 4 sides	BZ	Less Anchor Bolts
63361	POLESQS2B/3007G5INTTBZ	Square Straight	30	7	5	Tenon Top	BZ	
63362	POLESQS2B/3007G5IND1BZ	Square Straight	30	7	5	Drill 1 side	BZ	
63363	POLESQS2B/3007G5IND290BZ	Square Straight	30	7	5	Drill 2 sides @ 90 degrees	BZ	
63364	POLESQS2B/3007G5IND2180BZ	Square Straight	30	7	5	Drill 2 sides @ 180 degrees	BZ	
63365	POLESQS2B/3007G5IND3BZ	Square Straight	30	7	5	Drill 3 sides	BZ	
63366	POLESQS2B/3007G5IND4BZ	Square Straight	30	7	5	Drill 4 sides	BZ	
63367	POLESQS2B/3007G5INTTBZLAB	Square Straight	30	7	5	Tenon Top	BZ	Less Anchor Bolts
63368	POLESQS2B/3007G5IND1BZLAB	Square Straight	30	7	5	Drill 1 side	BZ	Less Anchor Bolts
63369	POLESQS2B/3007G5IND290BZLAB	Square Straight	30	7	5	Drill 2 sides @ 90 degrees	BZ	Less Anchor Bolts
63370	POLESQS2B/3007G5IND2180BZLAB	Square Straight	30	7	5	Drill 2 sides @ 180 degrees	BZ	Less Anchor Bolts
63371	POLESQS2B/3007G5IND3BZLAB	Square Straight	30	7	5	Drill 3 sides	BZ	Less Anchor Bolts
63372	POLESQS2B/3007G5IND4BZLAB	Square Straight	30	7	5	Drill 4 sides	BZ	Less Anchor Bolts

Physical Information

Shaft Base Size	(A) Bolt Circle	(B) Base Size	(C) Base Thickness	Bolt Projection	Anchor Bolt Size
4" Square Poles	8-11" (203-279mm)	10.5" (266mm)	3/4"	4"	M20 x 27 1/2"
5" Square Poles	10.6-12" (268-310mm)	11" (280mm)	1"	4"	M22 x 33"

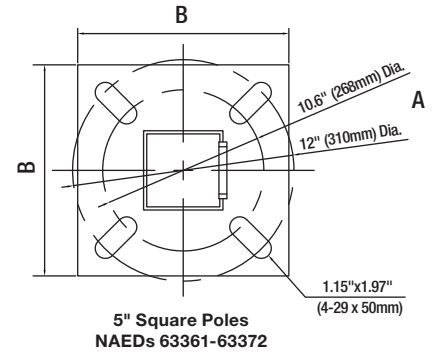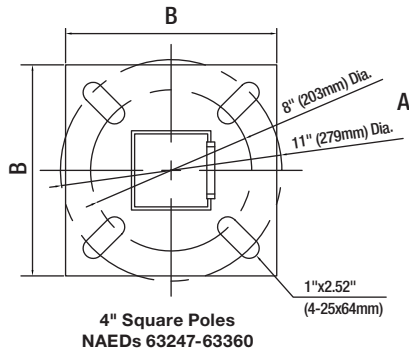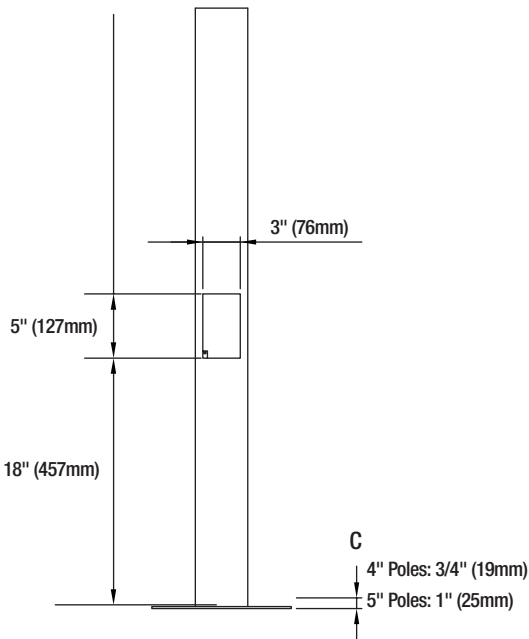


Ordering Information (Accessories)

Item Number	Ordering Abbreviation	Item Description	Compatibility
63323	POLESQS2B/ANJBOLTKIT/304	3/4" x 30" Anchor Bolt Kit (set of 4 bolts)	Compatible with 63247-63360
63324	POLESQS2B/ANJBOLTKIT/364	1" x 36" Anchor Bolt Kit (set of 4 bolts)*	Compatible with 63361-63372
63315	POLESQS2B/TENON/4IN/BZ	4" Tenon Mount, Bronze Finish	
63316	POLESQS2B/TENON/5IN/BZ	5" Tenon Mount, Bronze Finish	
63317	POLESQS2B/DBLTENON/4IN/BZ	4" Double Tenon Bracket, Bronze Finish	Requires TT pole types: 63247, 63253, 63259, 63265, 63325, 63331, 63337, 63343, 63349, 63355
63318	POLESQS2B/DBLTENON/5IN/BZ	5" Double Tenon Bracket, Bronze Finish	Requires TT pole types: 63361, 63367
63319	POLESQS2B/DBLBULHORN/BZ	Double Bullhorn Bracket, Bronze Finish	Requires TT pole types: 63247, 63253, 63259, 63265, 63325, 63331, 63337, 63343, 63349, 63355, 63361, 63367
63320	POLESQS2B/TPLBULHORN/BZ	Triple Bullhorn Bracket, Bronze Finish	Requires TT pole types: 63247, 63253, 63259, 63265, 63325, 63331, 63337, 63343, 63349, 63355, 63361, 63367
63321	POLESQS2B/QUADTENON/4IN/BZ	4" Quad Tenon Bracket, Bronze Finish	Requires TT pole types: 63247, 63253, 63259, 63265, 63325, 63331, 63337, 63343, 63349, 63355
63322	POLESQS2B/QUADTENON/5IN/BZ	5" Quad Tenon Bracket, Bronze Finish	Requires TT pole types: 63361, 63367

*Used for 5" 30' pole only. All other poles use 63323.

Single Vertical Tenon – 2 3/8" diameter

Item Number 63315 – 4 inch
Item Number 63316 – 5 inch

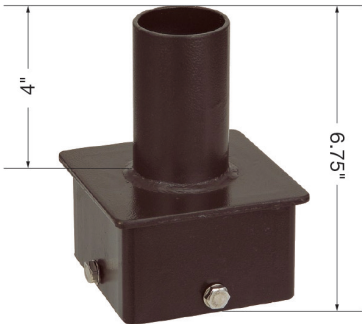


Double Bullhorn

Item Number 63319




Triple Bullhorn

Item Number 63320

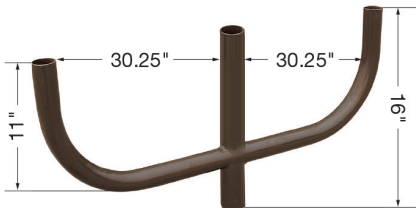


Double Tenon

Item Number 63317 – 4 inch
Item Number 63318 – 5 inch

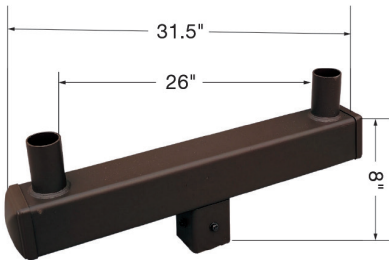

Quad Tenon

Item Number 63321 – 4 inch
Item Number 63322 – 5 inch

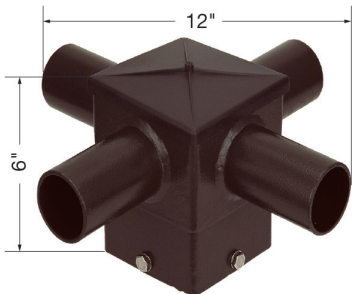

Available Wind Loading

Ordering Abbreviation	NAEDs	90 MPH	100 MPH	110 MPH	120 MPH	130 MPH	150 MPH	Anchor Bolt	
		EPA (ft²)	EPA (ft²)	EPA (ft²)	EPA (ft²)	EPA (ft²)	EPA (ft²)	Diameter (in)	Length (in)
POLESQS2B/1211G4IN*	63247-63258	12	12	12	12	9.2	6.8	0.75	30
POLESQS2B/1511G4IN*	63259-63270	12	12	12	9.8	7.8	4.9	0.75	30
POLESQS2B/1711G4IN*	63325-63336	12	12	9.9	7.6	5.9	3.3	0.75	30
POLESQS2B/2011G4IN*	63337-63348	12	9.1	6.7	4.8	3.4	1.3	0.75	30
POLESQS2B/2511G4IN*	63349-63360	7	4.6	2.7	1.3	0.3	–	0.75	30
POLESQS2B/3007G5IN*	63361-63372	11.7	7.8	4.8	2.5	0.8	–	1	36

*For any mounting configuration

Pole Loading

Luminaire Model	EPA [ft^2]
AREAFLD2A 80-150W (pole mount)	0.35
AREAFLD2A 200-300W (pole mount)	0.52
AREAFLD2A 80-150W (slipfitter mount)	1.14
AREAFLD2A 200-300W (slipfitter mount)	1.62
AREAFLD3A 150W (pole mount)	0.47
AREAFLD3A 300W (pole mount)	0.62
AREAFLD3A 150W (slipfitter mount)	1.08
AREAFLD3A 300W (slipfitter mount)	1.62
AREAFLD4A 100/190W (pole mount)	0.61
AREAFLD4A 100/190W (slipfitter mount)	1.53
AREAFLD4A 290W (pole mount)	0.7
AREAFLD4A 290W (slipfitter mount)	1.81
FLOOD 15-35W	0.46
FLOOD 60-80W	0.68
FLOOD 105-140W	1.23
FLOOD 205-255W	1.74
FLOOD 290-330W	1.99

For direct horizontal mount to pole (no slipfitter)

Pole Description	NAEDs	90 MPH		100 MPH		110 MPH		120 MPH		130 MPH		150 MPH	
		AREAFLD4A 100/190W	AREAFLD4A 290W	AREAFLD4A 100/190W	AREAFLD4A 290W	AREAFLD4A 100/190W	AREAFLD4A 290W	AREAFLD4A 100/190W	AREAFLD4A 290W	AREAFLD4A 100/190W	AREAFLD4A 290W	AREAFLD4A 100/190W	AREAFLD4A 290W
POLESQS2B/1211G4IN*	63248-63252; 63254-63258	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+
POLESQS2B/1511G4IN*	63260-63264; 63266-63270	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+	8	7
POLESQS2B/1711G4IN*	63326-63330; 63332-63336	8+	8+	8+	8+	8+	8+	8+	8+	8+	8	5	4
POLESQS2B/2011G4IN*	63338-63342; 63344-63348	8+	8+	8+	8+	8+	8+	7	6	5	4	2	1
POLESQS2B/2511G4IN*	63350-63354; 63356-63360	8+	8+	7	6	4	3	2	1	–	–	–	–
POLESQS2B/3007G5IN*	63362-63366; 63368-63372	8+	8+	8+	8+	7	6	4	3	1	1	–	–

*Can be any one of the following mounting configurations: D1, D290, D2180, D3, D4. Can be blank or LAB.

For direct horizontal mount to pole (no slipfitter)

Pole Description	NAEDs	90 MPH		100 MPH		110 MPH		120 MPH		130 MPH		150 MPH	
		AREAFLD3A 150W	AREAFLD3A 300W	AREAFLD3A 150W	AREAFLD3A 300W	AREAFLD3A 150W	AREAFLD3A 300W	AREAFLD3A 150W	AREAFLD3A 300W	AREAFLD3A 150W	AREAFLD3A 300W	AREAFLD3A 150W	AREAFLD3A 300W
POLESQS2B/1211G4IN*	63248-63252; 63254-63258	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+
POLESQS2B/1511G4IN*	63260-63264; 63266-63270	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+	7
POLESQS2B/1711G4IN*	63326-63330; 63332-63336	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+	7	5
POLESQS2B/2011G4IN*	63338-63342; 63344-63348	8+	8+	8+	8+	8+	8+	8+	7	7	5	2	2
POLESQS2B/2511G4IN*	63350-63354; 63356-63360	8+	8+	9	7	5	4	2	2	–	–	–	–
POLESQS2B/3007G5IN*	63362-63366; 63368-63372	8+	8+	8+	8+	8+	7	5	4	1	1	–	–

*Can be any one of the following mounting configurations: D1, D290, D2180, D3, D4. Can be blank or LAB.

Pole Description	NAEDs	90 MPH		100 MPH		110 MPH		120 MPH		130 MPH		150 MPH	
		AREAFLD2A 150W	AREAFLD2A 200-300W	AREAFLD2A 150W	AREAFLD2A 200-300W	AREAFLD2A 150W	AREAFLD2A 200-300W	AREAFLD2A 150W	AREAFLD2A 200-300W	AREAFLD2A 150W	AREAFLD2A 200-300W	AREAFLD2A 150W	AREAFLD2A 200-300W
POLESQS2B/1211G4IN*	63248-63252; 63254-63258	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+
POLESQS2B/1511G4IN*	63260-63264; 63266-63270	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+
POLESQS2B/1711G4IN*	63326-63330; 63332-63336	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+	8+	6
POLESQS2B/2011G4IN*	63338-63342; 63344-63348	8+	8+	8+	8+	8+	8+	8+	8+	8+	6	3	2
POLESQS2B/2511G4IN*	63350-63354; 63356-63360	8+	8+	8+	8	7	5	3	2	–	–	–	–
POLESQS2B/3007G5IN*	63362-63366; 63368-63372	8+	8+	8+	8+	8+	8+	7	4	2	1	–	–

*Can be any one of the following mounting configurations: D1, D290, D2180, D3, D4. Can be blank or LAB.

With slipfitter mounting

Pole Description	NAEDs	90 MPH			100 MPH			110 MPH		
		Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	8+	8	6	8+	8	6	8+	8	6
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	8+	8	6	8+	8	6	8+	8	6
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	8+	8	6	8+	8	6	8	6	4
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	8+	8	6	7	6	4	5	4	3
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	5	4	3	3	3	2	2	1	1
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	8+	7	5	6	5	3	3	3	2
Pole Description	NAEDs	120 MPH			130 MPH			150 MPH		
		Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	8+	8	6	7	6	4	5	4	3
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	7	6	4	6	5	3	3	3	2
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	6	5	3	4	3	2	2	2	1
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	3	3	2	2	2	1	1	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	1	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	2	3	2	1	1	1	–	–	–

*Can be blank (includes anchor bolts) or LAB (less anchor bolts).

Pole Description	NAEDs	90 MPH		100 MPH		110 MPH		120 MPH		130MPH		150MPH	
		AREAFLD4A 100/190W	AREAFLD4A 290W	AREAFLD4A 100/190W	AREAFLD4A 290W	AREAFLD4A 100/190W	AREAFLD4A 290W	AREAFLD4A 100/190W	AREAFLD4A 290W	AREAFLD4A 100/190W	AREAFLD4A 290W	AREAFLD4A 100/190W	AREAFLD4A 290W
With Double Tenon, Knuckle, 2 Area Lights													
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	–	–
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	Y	Y	Y	Y	Y	Y	Y	–	–	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	Y	Y	Y	–	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	Y	Y	Y	Y	Y	–	–	–	–	–	–	–
With Double Bullhorn, Knuckle, 2 Area Lights													
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	–	–
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	Y	Y	Y	Y	Y	Y	Y	–	–	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	Y	Y	Y	–	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	Y	Y	Y	Y	Y	Y	–	–	–	–	–	–
With Triple Bullhorn, Knuckle, 3 Area Lights													
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	–
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	–	–
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	Y	Y	Y	–	–	–	–
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	Y	Y	Y	Y	–	–	–	–	–	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	Y	Y	–	–	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	Y	Y	Y	–	–	–	–	–	–	–	–	–
With Quad Bullhorn, Knuckle, 4 Area Lights													
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	–	–
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	Y	Y	Y	Y	–	–	–
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	Y	Y	Y	Y	Y	–	–	–	–	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	Y	Y	–	–	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	Y	Y	Y	Y	–	–	–	–	–	–	–	–

*Can be blank (includes anchor bolts) or LAB (less anchor bolts).

Pole Description	NAEDs	90 MPH		100 MPH		110 MPH		120 MPH		130MPH		150MPH	
		AREAFLD3A 150W	AREAFLD3A 300W	AREAFLD3A 150W	AREAFLD3A 300W	AREAFLD3A 150W	AREAFLD3A 300W	AREAFLD3A 150W	AREAFLD3A 300W	AREAFLD3A 150W	AREAFLD3A 300W	AREAFLD3A 150W	AREAFLD3A 300W
With Double Tenon, Knuckle, 2 Area Lights													
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	–
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	Y	Y	Y	Y	Y	Y	Y	Y	–	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	Y	Y	Y	Y	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	Y	Y	Y	Y	Y	Y	–	–	–	–	–	–
With Double Bullhorn, Knuckle, 2 Area Lights													
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	–
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	Y	Y	Y	Y	Y	Y	Y	Y	–	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	Y	Y	Y	Y	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	Y	Y	Y	Y	Y	Y	–	–	–	–	–	–
With Triple Bullhorn, Knuckle, 3 Area Lights													
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	–
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	Y	Y	Y	Y	–	–	–
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	Y	Y	Y	Y	Y	Y	–	–	–	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	Y	Y	–	–	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	Y	Y	Y	Y	Y	–	–	–	–	–	–	–
With Quad Bullhorn, Knuckle, 4 Area Lights													
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	–
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	–	–
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	Y	Y	Y	Y	Y	Y	–	–	–	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	Y	Y	Y	–	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	Y	Y	Y	Y	Y	–	–	–	–	–	–	–

*Can be blank (includes anchor bolts) or LAB (less anchor bolts).

Pole Description	NAEDs	90 MPH		100 MPH		110 MPH		120 MPH		130MPH		150MPH	
		AREAFLD2A 80-150W	AREAFLD2A 200-300W	AREAFLD2A 80-150W	AREAFLD2A 200-300W	AREAFLD2A 80-150W	AREAFLD2A 200-300W	AREAFLD2A 80-150W	AREAFLD2A 200-300W	AREAFLD2A 80-150W	AREAFLD2A 200-300W	AREAFLD2A 80-150W	AREAFLD2A 200-300W
With Double Tenon, Knuckle, 2 Area Lights													
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	–	–
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	Y	Y	Y	Y	Y	Y	Y	–	–	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	Y	Y	Y	Y	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	Y	Y	Y	Y	Y	Y	–	–	–	–	–	–
With Double Bullhorn, Knuckle, 2 Area Lights													
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	–
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	Y	Y	Y	Y	Y	Y	Y	Y	–	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	Y	Y	Y	Y	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	Y	Y	Y	Y	Y	Y	–	–	–	–	–	–
With Triple Bullhorn, Knuckle, 3 Area Lights													
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	–	–
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	Y	Y	Y	Y	–	–	–
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	Y	Y	Y	Y	Y	–	–	–	–	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	Y	Y	–	–	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	Y	Y	Y	Y	–	–	–	–	–	–	–	–
With Quad Bullhorn, Knuckle, 4 Area Lights													
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	–
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	–	–
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	Y	Y	Y	Y	Y	Y	–	–	–	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	Y	Y	Y	–	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	Y	Y	Y	Y	Y	–	–	–	–	–	–	–

*Can be blank (includes anchor bolts) or LAB (less anchor bolts).

Pole Description	NAEDs	90 MPH			100 MPH			110 MPH		
		Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W
With Double Tenon, Knuckle, 2 Flood Lights										
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	Y	Y	Y	Y	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	Y	Y	Y	Y	Y	Y	Y	–	–
Pole Description	NAEDs	120 MPH			130 MPH			150 MPH		
		Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W
With Double Tenon, Knuckle, 2 Flood Lights										
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	–	–
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	–	–	–	–
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	–	–	–	–	–	–	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	–	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	–	–	–	–	–	–	–	–	–

*Can be blank (includes anchor bolts) or LAB (less anchor bolts).


Pole Description	NAEDs	90 MPH			100 MPH			110 MPH		
		Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W
With Double Bullhorn, Knuckle, 2 Flood Lights										
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	Y	Y	Y	Y	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	Y	Y	Y	Y	Y	Y	Y	–	–
Pole Description	NAEDs	120 MPH			130 MPH			150 MPH		
		Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W
With Double Bullhorn, Knuckle, 2 Flood Lights										
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	–	–
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	–	–	–	–
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	–	–	–	–	–	–	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	–	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	–	–	–	–	–	–	–	–	–

*Can be blank (includes anchor bolts) or LAB (less anchor bolts).

Pole Description	NAEDs	90 MPH			100 MPH			110 MPH		
		Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W
With Triple Bullhorn, Knuckle, 3 Flood Lights										
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	Y	Y	Y	Y	Y	Y	Y	Y
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	Y	Y	Y	Y	Y	Y	Y	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	Y	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	Y	Y	Y	Y	–	–	–	–	–
Pole Description	NAEDs	120 MPH			130 MPH			150 MPH		
		Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W	Flood 105-140W	Flood 205-255W	Flood 290-330W
With Triple Bullhorn, Knuckle, 3 Flood Lights										
POLESQS2B/12/11G4INTT/BZ*	63247, 63253	Y	Y	Y	Y	Y	Y	Y	–	–
POLESQS2B/15/11G4INTT/BZ*	63259, 63265	Y	Y	Y	Y	–	–	–	–	–
POLESQS2B/17/11G4INTT/BZ*	63325, 63331	Y	–	–	–	–	–	–	–	–
POLESQS2B/20/11G4INTT/BZ*	63337, 63343	–	–	–	–	–	–	–	–	–
POLESQS2B/25/11G4INTT/BZ*	63349, 63355	–	–	–	–	–	–	–	–	–
POLESQS2B/30/07G5INTT/BZ*	63361, 63367	–	–	–	–	–	–	–	–	–

*Can be blank (includes anchor bolts) or LAB (less anchor bolts).

Wind Map

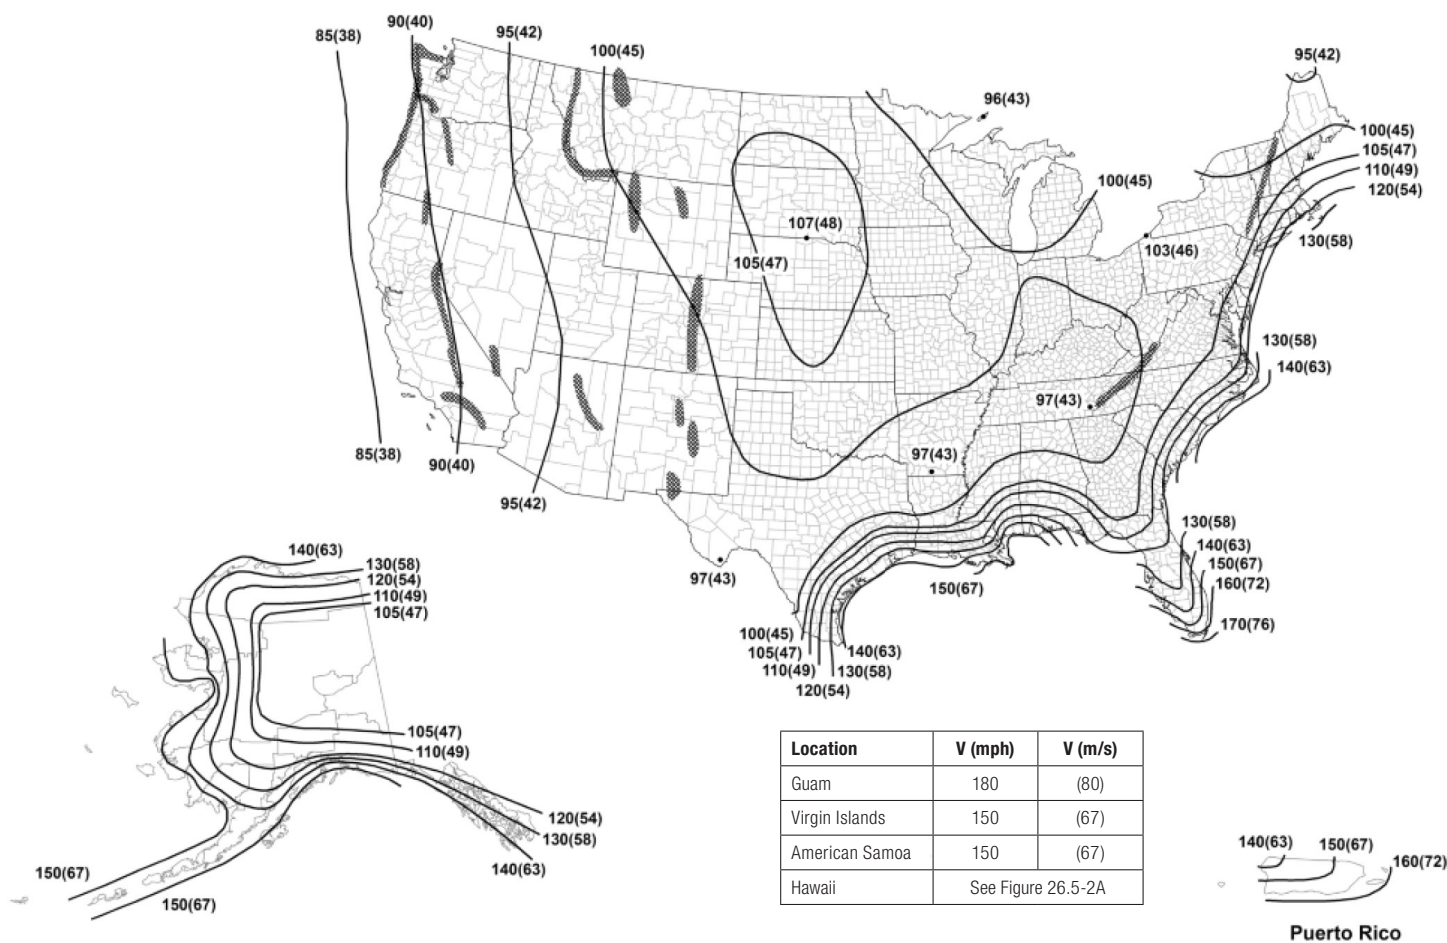

Notes: Dark shading indicates a special wind region.

1. Values are nominal design 3-s gust wind speeds in miles per hour (m/s) at 33 ft. (10 m) above ground for Exposure Category C.
2. Linear interpolation is permitted between contours. Point values are provided to aid with interpolation.
3. Islands, coastal areas, and land boundaries outside the last contour shall use the last wind speed contour.
4. Mountainous terrain, gorges, ocean promontories, and special wind regions shall be examined for unusual wind conditions.
5. Wind speeds correspond to approximately a 15% probability of exceedance in 50 years. (Annual Exceedance Probability = 0.00333, MRI = 300 years).
6. Location-specific basic wind speeds shall be permitted to be determined using www.atcouncil.org/windspeed.

LEDVANCE LLC
181 Ballardvale Street, Suite 203
Wilmington, MA 01887 USA
Phone 1-800-LIGHTBULB (1-800-544-4828)
www.ledvanceUS.com

SYLVANIA and LEDVANCE are registered trademarks.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.

[/sylvania](https://twitter.com/sylvania) [/sylvania](https://facebook.com/sylvania)

