


PRODUCT DATASHEET

LVED PFM 14/220-240/350-LPF

PERFORMANCE INDOOR DRIVER

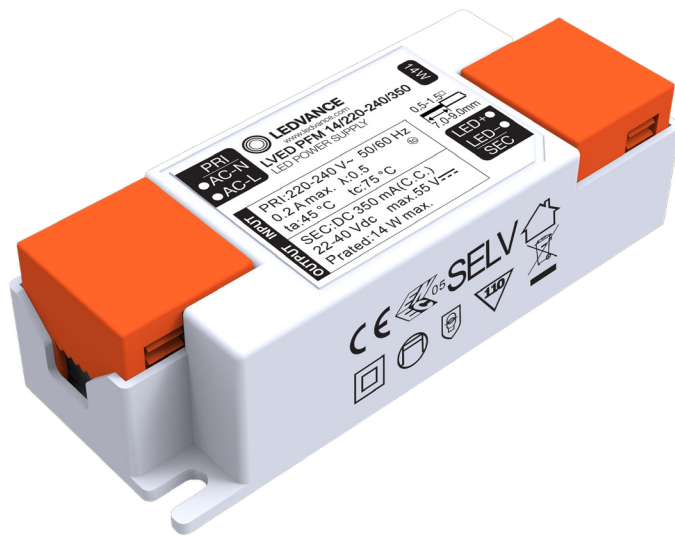

AREAS OF APPLICATION

Indoor

PRODUCT BENEFITS

TECHNICAL DATA

General

Model Name / Basic Code	LVED PFM 14/220-240/350-LPF / AC43314
Product Category	Non-dim
Region	Turkey
Product Installation Type & Location	Independent
Legally Required Standards / Directives or Certifications	CE (CE LVD, EMC, ROHS, Reach, SLR/ELR) & ENEC
Glow Wire Test Temperature acc. IEC 60695-2-11	650°C
Indoor / Outdoor	Indoor
IP Level	IP20
Protection Class	Class II

Electrical Data

Requirement	Condition	Rated Value	Tolerance	Unit
Input Voltage	Direct AC Mains	220-240	±10%	V
Input Voltage	Direct DC	N/A		V
Input Current	Direct AC Mains	200	±10%	mA
Product Input Power	Steady state	16.8	max	W
Standby		<0.5W		W
No Load Power		<0.5W		W
Rated Frequency		50/60	50/60	Hz
Start Time	Rated voltage	<0.5		s
Power Factor (PF)	Rated voltage	>0.5@Full Load, 230VAC		
Displacement Factor (DF)	Rated voltage	>0.5		
Total Harmonic Distortion (THD)	Max / Min Load	<120% / <111% @Full Load, 230VAC	Max	%
Output Voltage	Steady state	22-40		%

Output Current	Steady state	350		mA
Output Current / Voltage Tolerance	Full Load	±5%@Full Load, 230VAC		%
Output Power	Steady state	14@Full Load, 230VAC		W
Driver Efficiency	Full Load	83%@Full Load, 230VAC	Min	%
Output Ripple Current Percentage	Full Load $((I_{max} - I_{Min}) / (I_{max} + I_{Min}) * 100\%)$	±5%@Full Load	Max	%
Noise Level	Test at 20cm with noise testing equipment	Single Product <20		dB
Dimming Range	For all level load	N/A		
Surge Voltage Capability		L/N: 500V		
Over Temperature Protection		Yes (protection by driver IC component)		
Over Current Protection		N/A		
Over Voltage Protection		Yes (protection by driver IC component)		
Other Requirements		N/A		

Lifetime and Application Enviroment

Requirement	Condition	Rated Value	Unit
Declared Lifetime	Full load with max tc	5000h	hrs
Ambient Temperature Range (Ta)		-20 ~ +45	°C
^R Tc Temperature of Product Under Ta Max	Max	75	°C
Max Tc Temperature of Driver in Fault Condition		<110	°C
Operating Humidity		20 ~ 90%	%
Storage Humidity	Product	20 ~ 90%	%
Switching Cycle	0.5min on / 0.5min off cycle	25000	times
Warranty Year	24hrs / day	5 Years and 3 Months	years
Lifetime Calculation at Ta and ^R Tc	Ta: 31 / Tc: 60.5 / Lifetime(hrs): 252090 Ta: 34 / Tc: 63.2 / Lifetime(hrs): 225620 Ta: 45 / Tc: 72.7 / Lifetime(hrs): 108220		
Other Requirement	N/A		


Smart Feature

Requirement	Condition	Rated Value	/
Wireless Protocol		Wifi	
Compability With 3rd application		Product with NO dim App Type: Smart +/- Google Speaker / Amazon Speaker / Apple Home Kit	
		Product with NO dim App Type: Philip hue / Amazon Speaker, etc	
		Product with NO dim App Type: Smart + Wifi / Goog- le Speaker / Amazon Speaker	
		Combaability with Gen1 & Gen2 Wifi remote controller	

Protection Function

MAX Number Of Dirvers On Different Breaker						
Inrush Charge Th50 (us)	102us	Direct Mains Operation	B32	B25	B16	B10
Input Current	0.2A		N/A	100	80	50
Inrush Current Peak (A)	12A		C32	C25	C16	C10
			N/A	100	80	50

Dimensions & Weight

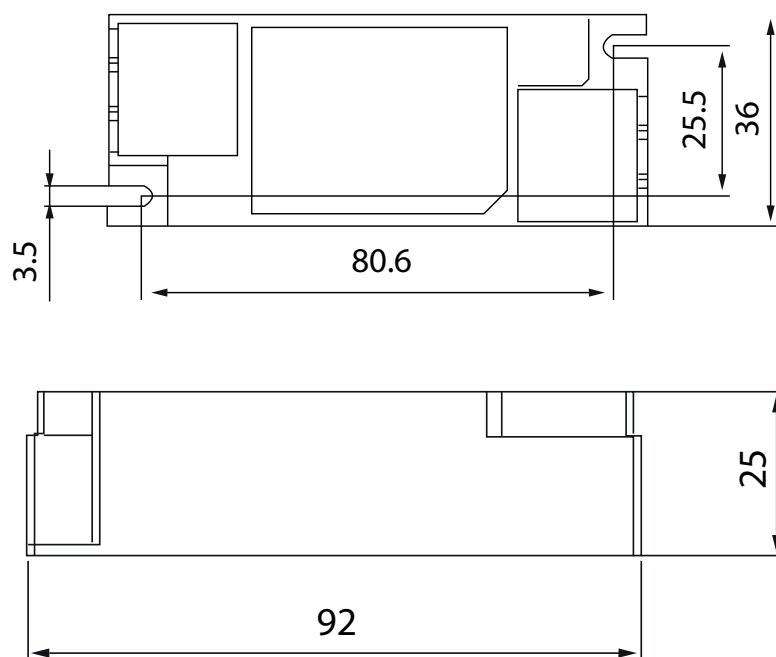


Length	92 mm
Width	36 mm
Height	25 mm
Net Weight	49g
Cable Length & Size of LED Driver	0.5-1.5mm
Other Requirements	N/A

Note: please mark LED driver and luminaire module Tc test point in picture as above


Short Text	EAN-010	EAN-040
LVED PFM 14/220-240/350-LPF	-	-

Curve

Typical THD v.s Load

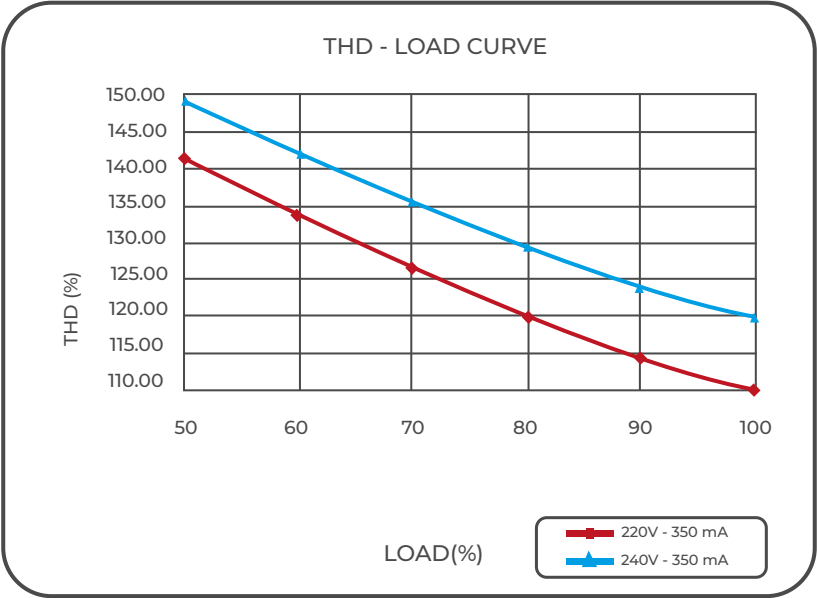


Typical Efficiency v.s Load

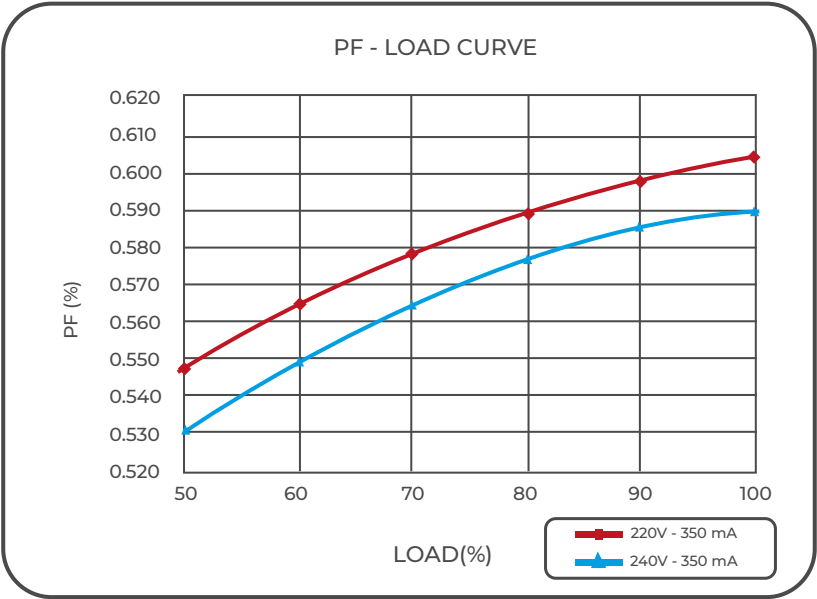

Curve

Typical Power Factor v.s Load

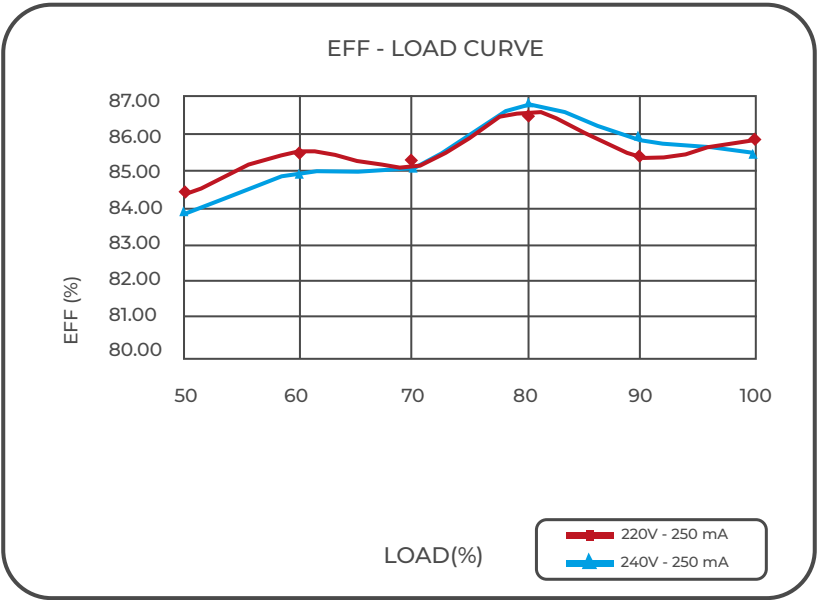

Typical Lifetime v.s Tc

