



OUR STRENGTHS ARE YOUR ADVANTAGE



COOPERATIVE

As a dedicated and collaborative partner, LEDVANCE boasts a vast, worldwide sales team and over a century of experience, ensuring we stand by your side at all times.



VERSATILE

Modern, smart, decorative, functional, robust and practical – our extensive portfolio meets customer requirements in all categories and virtually every area of application.



SALES-BOOSTING

Attract attention, encourage purchases. We offer targeted support for your sales with creative, pre-tested marketing concepts.



CARING

We are committed to contributing to a greener planet by reducing CO_2 emissions and waste through sustainable products, solutions and processes. We empower our customers to use light more efficiently to save energy and reduce their environmental footprint.



UNIQUE

Fresh, dynamic, high-quality and bold – we know at an early stage what interests customers and where lighting trends are heading. LEDVANCE is unmistakably LEDVANCE.



INNOVATION MEETS TRADITION

We embody progress and the passion to shape the future of lighting actively. By blending our courage to explore new paths with our experience from more than 100 years of lighting expertise, we lead the way forward.



ALL IN ONE


At LEDVANCE, we've got everything you need from a single source – LED luminaires, lamps, and Smart Home products. We offer you a wide range of innovative and market-driven solutions, setting new trends along the way.



FIRST-CHOICE PARTNER

As the perfect strategic ally, we offer an extensive portfolio, a robust sales network, and unparalleled global market access to fulfill all your requirements.

GLOBAL PRESENCE

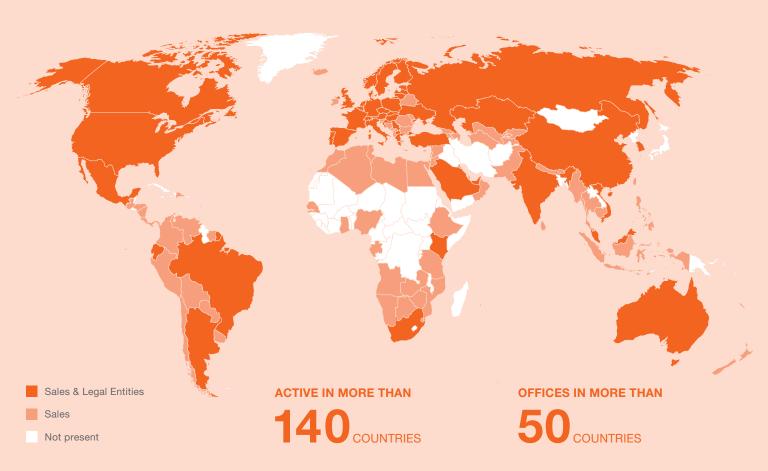

CONTENT

| LEDVANCE POWER THROUGH LIGHT | 2 |
|---|----|
| PRODUCTS | |
| PRODUCTS UNDERCABINET LUMINAIRES | (|
| SMART ⁺ UNDERCABINET LUMINAIRES | 8 |
| - SMART ⁺ WIFI UNDERCABINET SLIM | 8 |
| - SMART ⁺ WIFI UNDERCABINET PANEL | 10 |
| - SMART ⁺ WIFI UNDERCABINET | 12 |
| - SMART ⁺ WIFI UNDERCABINET SELECT SENSOR | 14 |
| - SMART ⁺ WIFI UNDERCABINET ROUND | 16 |
| UNDERCABINET LUMINAIRES WITH SENSOR | 18 |
| – LINEAR LED EDGE SENSOR | 18 |
| – LINEAR ANGLE FRAMELESS SENSOR | 20 |
| - CABINET LED SLIM SENSOR | 22 |
| - LINEAR LED SWIVEL MOBILE SENSOR | 24 |
| - LINEAR LED FLIP SENSOR | 26 |
| - LINEAR LED FLAT SENSOR | 28 |
| - LINEAR LED FLAT SENSOR USB | 30 |
| UNDERCABINET LUMINAIRES | 32 |
| - UNDERCABINET PANEL FRAMELESS | 32 |
| - UNDERCABINET SOCKET FRAMELESS | 34 |
| - LINEAR LED TURN CONNECT | 36 |
| – LINEAR LED TURN | 38 |
| - LINEAR LED FLAT ECO | 40 |
| - LINEAR LED FLAT SOCKET | 42 |
| - UNDERCABINET SPOT PUCK | 44 |
| - UNDERCABINET SPOT MAGNET | 46 |

| BATTEN LUMINAIRES | 48 |
|--|------------|
| BATTEN LUMINAIRES WITH SENSOR | 50 |
| – LED SENSOR BATTEN | 50 |
| BATTEN LUMINAIRES WITH CONNECTION VIA SCREW TERMINAL | 52 |
| – LED VALUE BATTEN | 52 |
| – LED POWER BATTEN | 54 |
| BATTEN LUMINAIRES WITH EU-PLUG | 56 |
| – LED SWITCH BATTEN | 56 |
| - TUBEKIT® | 58 |
| DAMP-PROOF LUMINAIRES | 60 |
| SMART ⁺ DAMP-PROOF LUMINAIRES | 62 |
| - SMART ⁺ SUBMARINE | 62 |
| DAMP-PROOF LUMINAIRES WITH SENSOR | 64 |
| - SUBMARINE SENSOR | 64 |
| LINEAR DAMP-PROOF LUMINAIRES | 66 |
| – PCR SUBMARINE NATURE LOOP | 66 |
| - SUBMARINE THROUGH-WIRING | 68 |
| - SUBMARINE INTEGRATED | 70 |
| - SUBMARINE INTEGRATED SLIM VALUE | 72 |
| - SUBMARINE | 7 4 |
| - DAMP-PROOF ESSENTIAL WITH EXCHANGEABLE LED TUBE | 76 |
| - DAMP-PROOF ESSENTIAL I SLIM | 78 |
| - DAMP-PROOF ESSENTIAL EXTRUSION | 80 |
| OVAL DAMP-PROOF LUMINAIRES | 82 |
| – LED BULKHEAD | 82 |

| WORKLIGHTS | 84 |
|---|-----|
| BATTERY-OPERATED WORKLIGHTS | 86 |
| – POWER FOR ALL ALLIANCE OUTDOOR WORKLIGHT | 86 |
| – POWER FOR ALL ALLIANCE INDOOR WORKLIGHT | 88 |
| – WORKLIGHT BATTERY | 90 |
| – WORKLIGHT BATTERY TUBE | 92 |
| - WORKLIGHT VALUE BATTERY POCKET | 94 |
| - WORKLIGHT VALUE BATTERY R-STAND | 96 |
| – WORKLIGHT VALUE BATTERY FLEX | 98 |
| - WORKLIGHT VALUE BATTERY PANEL | 100 |
| MAINS-OPERATED WORKLIGHTS | 102 |
| - WORKLIGHT PANEL | 102 |
| - WORKLIGHT R-STAND SOCKET | 104 |
| - WORKLIGHT S-STAND | 106 |
| - WORKLIGHT VALUE R-STAND | 108 |
| - WORKLIGHT VALUE 360° SOCKET | 110 |
| - WORKLIGHT VALUE FLEX | 112 |
| – WORKLIGHT VALUE HIGH POWER | 114 |
| BATTERY-OPERATED TRIPODS | 116 |
| – WORKLIGHT BATTERY TRIPOD | 116 |
| – WORKLIGHT VALUE BATTERY TRIPOD | 118 |
| MAINS-OPERATED TRIPODS | 120 |
| - WORKLIGHT TRIPOD | 120 |
| - WORKLIGHT VALUE TRIPOD | 122 |
| | |
| POS CONCEPTS | 124 |
| GLOSSARY | 126 |
| | |

UNDERCABINET LUMINAIRES

Discover our convenient and easy-to-use undercabinet luminaires that brighten your shelves, cupboards and kitchen cabinets while adding style and functionality. Designed to blend seamlessly into your living spaces, all our undercabinet luminaires offer a made-to-measure lighting solution. Experience a seamless fusion of practicality and elegance, ensuring effortless management at your fingertips.

LEDVANCE introduces innovative luminaires designed to provide you with perfect lighting at every stage of your life, featuring durability, intelligent control, and exceptional versatility. With their sleek design and versatile functionality, these luminaires seamlessly integrate into your home's interior, enhancing both style and practicality. Let our innovative technology inspire you to effortlessly craft an atmosphere that not only illuminates but enriches your daily life, turning your home into a sanctuary of light and comfort.

















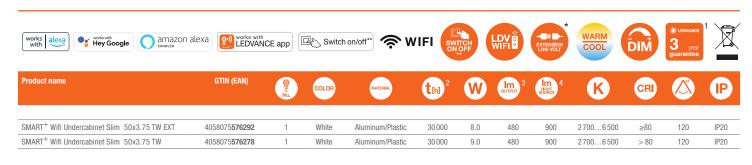


| Product name | | X PICL. | LED MODULE NTEGRATED | CONNECTOR | ACCES- SOFIES INCLURED | [mm] | (mm) | h [mm] | Ø d [mm] | |
|--|--------|---------|----------------------------|------------------|--|------|------|-----------|----------------|---|
| SMART ⁺ Wifi Undercabinet Slim 50x3.75 TW EXT | 15 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Connector, Connector cable | 500 | 38 | 8 | | 8 |
| SMART ⁺ Wifi Undercabinet Slim 50x3.75 TW | 15 000 | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Control box | 500 | 38 | 8 | - | 8 |

^{* 4058075576292}


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser









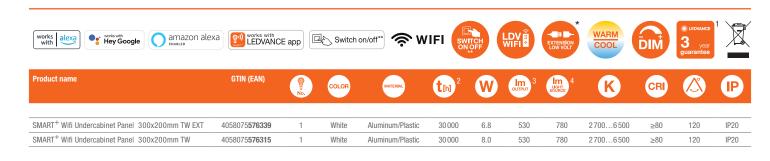


| Product name | | NCT. | LED MODULE INTEGRATED | CONNECTOR | ACCES- SORIES VELLIFED | [mm] | W | h _[mm] | Ø d [mm] | |
|---|--------|------|-----------------------------|------------------|--|------|-----|-------------------|----------------|---|
| | | | | | | | | | | |
| SMART ⁺ Wifi Undercabinet Panel 300x200mm TW EXT | 15 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Connector, Connector cable | 300 | 200 | 8 | - | 8 |
| SMART ⁺ Wifi Undercabinet Panel 300x200mm TW | 15 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Control box | 300 | 200 | 8 | _ | 8 |


^{* 4058075576339}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



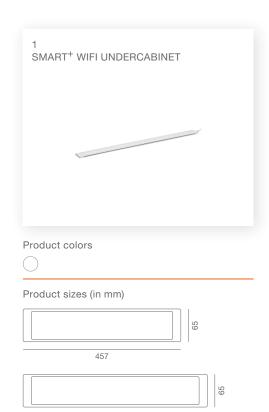



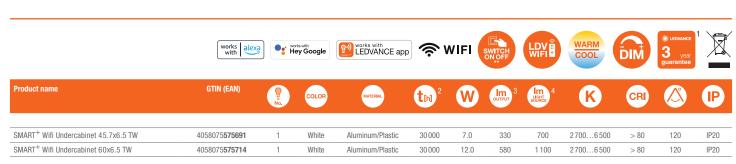

| Product name | | X Not. | LED MODULE SITEGRATED | CONNECTOR | ACCES- SORIES INCLUSED | [mm] | W [mm] | h [mm] | Ø d [mm] | |
|--|--------|--------|-----------------------------|------------------|---|------|--------|-----------|----------------|---|
| SMART ⁺ Wifi Undercabinet 45.7x6.5 TW | 15 000 | | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Control box | 457 | 65 | 9 | | 8 |
| SMART ⁺ Wifi Undercabinet 60x6.5 TW | 15 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Control box | 600 | 65 | 9 | - | 8 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

SMART⁺ WIFI UNDERCABINET SELECT SENSOR Brighten up your shelves, cabinets, and kitchen cupboards with our easy-to-install undercabinet luminaire. Varied: Can be individually customized, with light color options from warm white to cool white, while three modes are available: SMART+ WIFI, PIR sensor, or on/off. Long Life: Features a long lifespan of up to 30,000 hours, promoting energy savings. SMART+ control: Can be operated via an app or a voice Instant use: Is exceptionally quick and easy to install, making it perfect for placement under shelves, cabinets, and kitchen IP20 Protection: Protects against finger contact with live











| Product name | | X PICL. | LED MODULE NTEGRATED | CONNECTOR | ACCES- SONIES WILLIED | [mm] | W [mm] | h [mm] | Ø d [mm] | |
|--|--------|---------|----------------------------|------------------|----------------------------------|------|--------|-----------|----------------|---|
| Smart ⁺ Wifi Undercabinet Select 7W | 15 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply | 305 | 61 | 23 | _ | 4 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser











| Product name | | X P | LED MODULE NITEGRATED | CONNECTOR | ACCES- SORIES NOLLIDER | [mm] | (mm) | h [mm] | Ø d [mm] | |
|--|---------|-----|-----------------------------|------------------|---|------|------|-----------|----------------|---|
| | | | | | | | | | | |
| SMART ⁺ Wifi Undercabinet Round 83mm TW | 100 000 | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Control box | - | - | 12 | 83 | 6 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



LINEAR LED EDGE SENSOR



Product sizes (in mm)

































| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | Im 3 | Im 4 | K | CRI | | IP | |
|---------------------------------|-----------------------|-----|-------|----------|---------------------------|-----|-------------|------|-------------------|------|-----|------|--------|
| | | | | | | | | | | | | | |
| LINEAR EDGE SEN 30CM CCT DIM BK | 4058075 842526 | 1 | Black | Aluminum | 30 000 | 4.0 | 310 | 290 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 | 15 000 |
| LINEAR EDGE SEN 30CM CCT DIM WT | 4058075 842540 | 1 | White | Aluminum | 30 000 | 4.0 | 310 | 290 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 | 15 000 |
| LINEAR EDGE SEN 50CM CCT DIM BK | 4058075 842564 | 1 | Black | Aluminum | 30 000 | 8.0 | 650 | 640 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 | 15 000 |
| LINEAR EDGE SEN 50CM CCT DIM WT | 4058075 842588 | 1 | White | Aluminum | 30 000 | 8.0 | 650 | 640 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 | 15 000 |
| LINEAR EDGE 30CM RGBW DIM RC BK | 4058075 842601 | 1 | Black | Aluminum | 30 000 | 4.0 | 280 | 230 | 3000 + RGB | ≥ 80 | 110 | IP20 | 15 000 |
| LINEAR EDGE 30CM RGBW DIM RC WT | 4058075 842625 | 1 | White | Aluminum | 30 000 | 4.0 | 280 | 230 | 3000 + RGB | ≥ 80 | 110 | IP20 | 15 000 |
| LINEAR EDGE 50CM RGBW DIM RC BK | 4058075 842649 | 1 | Black | Aluminum | 30 000 | 8.0 | 500 | 460 | 3000 + RGB | ≥ 80 | 110 | IP20 | 15 000 |
| LINEAR EDGE 50CM RGBW DIM RC WT | 4058075 842663 | 1 | White | Aluminum | 30 000 | 8.0 | 500 | 460 | 3000 + RGB | ≥ 80 | 110 | IP20 | 15 000 |

| Product name | X Noch = | MODULE INTEGRATED | COMNECTOR | ACCES- SORIES INCLUSION | [mm] | W [mm] | ţh _[mm] | Ø d [mm] | 6 |
|---------------------------------|----------|----------------------|------------------|--|------|--------|--------------------|----------------|----------|
| | | | | | | | | | |
| LINEAR EDGE SEN 30CM CCT DIM BK | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable | 300 | 49 | 18 | - | 8 |
| LINEAR EDGE SEN 30CM CCT DIM WT | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable | 300 | 49 | 18 | _ | 8 |
| LINEAR EDGE SEN 50CM CCT DIM BK | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable | 500 | 49 | 18 | - | 8 |
| LINEAR EDGE SEN 50CM CCT DIM WT | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable | 500 | 49 | 18 | - | 8 |
| LINEAR EDGE 30CM RGBW DIM RC BK | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable, Remote control | 300 | 49 | 18 | - | 8 |
| LINEAR EDGE 30CM RGBW DIM RC WT | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable, Remote control | 300 | 49 | 18 | - | 8 |
| LINEAR EDGE 50CM RGBW DIM RC BK | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable, Remote control | 500 | 49 | 18 | _ | 8 |
| LINEAR EDGE 50CM RGBW DIM RC WT | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable, Remote control | 500 | 49 | 18 | _ | 8 |
| | | | | | | | | | |

 $^{^{\}star}$ 4058075842526; 4058075842640] * 4058075842601; 4058075842625] *** 4058075842649; 4058075842649; 4058075842663] **** 4058075842663, 4058075842601; 4058075842649; 4058075842663

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser
























| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | 3 очтрит | Im LIGHT SOURCE | K | CRI | | IP | |
|--|-----------------------|-----|-------|----------|---------------------------|-----|----------|-----------------|-------------------|------|-----|------|--------|
| Linear Angle Frameless Sensor 35cm CCT DIM Black | 4058075 842441 | 1 | Black | Aluminum | 30 000 | 5.0 | 320 | 330 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 | 15 000 |
| Linear Angle Frameless Sensor 35cm CCT DIM White | 4058075 842465 | 1 | White | Aluminum | 30 000 | 5.0 | 320 | 330 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 | 15 000 |
| Linear Angle Frameless Sensor 55cm CCT DIM Black | 4058075 842489 | 1 | Black | Aluminum | 30 000 | 7.5 | 480 | 490 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 | 15 000 |
| Linear Angle Frameless Sensor 55cm CCT DIM White | 4058075 842502 | 1 | White | Aluminum | 30 000 | 7.5 | 480 | 490 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 | 15 000 |

| Product name | X NCL. | MODULE NTEGRATED | CONNECTOR | ACCESONES NOLIFIED | [mm] | W [mm] | h [mm] | Ø d [mm] | |
|--|--------|---------------------|------------------|--|------|--------|-----------|----------------|---|
| Linear Angle Frameless Sensor 35cm CCT DIM Black | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable | 300 | 49 | 18 | _ | 8 |
| Linear Angle Frameless Sensor 35cm CCT DIM White | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable | 300 | 49 | 18 | - | 8 |
| Linear Angle Frameless Sensor 55cm CCT DIM Black | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable | 500 | 49 | 18 | - | 8 |
| Linear Angle Frameless Sensor 55cm CCT DIM White | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable | 500 | 49 | 18 | - | 8 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



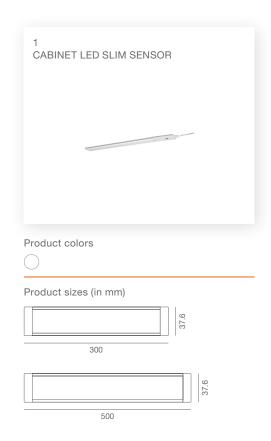























| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | lm оптрит | Im 4 SOURCE | K | CRI | | IP |
|---|-----------------------|-----|-------|------------------|---------------------------|------|------------------|----------------|-------|-----|-----|------|
| Cabinet LED Slim Sensor 300mm | 4058075 227699 | 1 | White | Plastic (PC, AN) | 30 000 | 6.0 | 250 | 480 | 3 000 | ≥80 | 110 | IP20 |
| Cabinet LED Slim Sensor 500mm | 4058075 268364 | 1 | White | Plastic (PC, AN) | 30 000 | 10.0 | 470 | 810 | 3 000 | ≥80 | 100 | IP20 |
| Cabinet LED Slim Sensor 300mm Two Light | 4058075 227712 | 1 | White | Plastic (PC, AN) | 30 000 | 11.0 | 530 | 960 | 3 000 | ≥80 | 110 | IP20 |
| Cabinet LED Slim Sensor 500mm Two Light | 4058075 227736 | 1 | White | Plastic (PC, AN) | 30 000 | 18.0 | 980 | 1 620 | 3 000 | ≥80 | 110 | IP20 |

| Product name | | X NCL. | LED MODULE BITEGRATED | CONNECTOR | ACCES- BONIES INCLUSED | [mm] | (mm) | h | Ø d [mm] | |
|---|---------|--------|-----------------------------|------------------|---|------|------|---|----------|---|
| Cabinet LED Slim Sensor 300mm | 100 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply | 300 | 38 | 8 | _ | 8 |
| Cabinet LED Slim Sensor 500mm | 100 000 | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply | 500 | 38 | 8 | - | 8 |
| Cabinet LED Slim Sensor 300mm Two Light | 100 000 | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector | 300 | 38 | 8 | - | 8 |
| Cabinet LED Slim Sensor 500mm Two Light | 100 000 | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector | 500 | 38 | 8 | - | 8 |


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

LINEAR LED SWIVEL MOBILE SENSOR Our stylish and practical undercabinet luminaire is designed to provide efficient and adaptable light for any setting. Functional & Practical: With warm white light color, fixed LED module and magnetically adjustable body. Long life: Designed for durability, it offers up to 30,000 hours of use while being energy-efficient, ensuring long-term savings. Sensor control: PIR motion and daylight sensor. - Instant use: Very easy to install and ideal for under shelves, cabinets and kitchen cupboards. IP20 Protection: Suitable for use in kitchens and living rooms, though it is not protected against water or moisture.



Product colors











| Product name | | X PIGL. | LED MODULE NTEGRATED | CONNECTOR | ACCES- SORIES INCLIED | [mm] | (mm) | h [mm] | Ø d [mm] | |
|----------------------------|--------|---------|----------------------------|-----------|-------------------------------|------|------|-----------|----------------|---|
| Linear LED Swivel 5W 3000K | 15 000 | _ | Not replaceable | - | Mounting equipment, USB cable | 350 | 49 | 36 | - | 8 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser







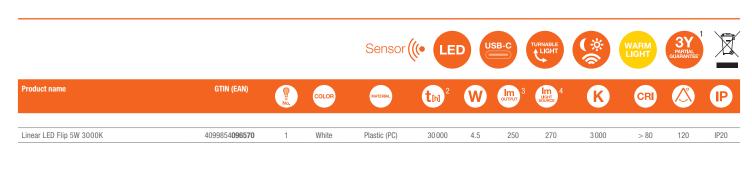

| Product name | | X P | LED MODULE NTEGRATED | CONNECTOR | ACCES- SORIES INCLUED | [mm] | w [mm] | h [mm] | Ø d [mm] | |
|--------------------------|--------|-----|----------------------------|-----------|-------------------------------|------|-----------|-----------|----------------|---|
| Linear LED Flip 5W 3000K | 15 000 | - | Not replaceable | - | Mounting equipment, USB cable | 305 | 49.1 | 25.5 | - | 8 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser












| Product name | | X O | LED MODULE STEGRATED | CONNECTOR | ACCES- SCHED INCLINED | [mm] | W [mm] | h [mm] | Ø d [mm] | |
|----------------------------------|---------|-----|----------------------------|------------------|---|------|--------|-----------|----------------|---|
| Linear LED Flat Sensor 12W 3000K | 100 000 | | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector cable | 527 | 67 | 19 | | 8 |
| Linear LED Flat Sensor 12W 4000K | 100 000 | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector cable | 527 | 67 | 19 | - | 8 |

^{* 4058075264410 | ** 4058075264618}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser































| TID. | |
|------|--|

| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | Іт 3 | Im ught source | K | CRI | | IP |
|------------------------------------|-----------------------|-----|-------|------------------|---------------------------|-----|-------------|----------------|----------|------|-----|------|
| | | | | | | | | | | | | |
| Linear LED Flat Sensor + USB 400mm | 4058075 762213 | 1 | Gray | Aluminum/Plastic | 25 000 | 3.2 | 200 | 270 | 30006500 | > 80 | 110 | IP20 |
| Linear LED Flat Sensor + USB 600mm | 4058075 762237 | 1 | Gray | Aluminum/Plastic | 25 000 | 4.0 | 270 | 340 | 30006500 | > 80 | 110 | IP20 |

| Product name | | X P | LED MODULE SITEGRATED | CONNECTOR | ACCESS SORES MICHIGEN | | W [mm] | h [mm] | Ø d [mm] | |
|------------------------------------|-------|-----|-----------------------------|-----------|-------------------------------|-----|--------|-----------|----------|---|
| Linear LED Flat Sensor + USB 400mm | 12500 | _ | Not replaceable | USB | Mounting equipment, USB cable | 400 | 40 | 9 | _ | 8 |
| Linear LED Flat Sensor + USB 600mm | 12500 | - | Not replaceable | USB | Mounting equipment, USB cable | 600 | 40 | 9 | - | 8 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product sizes (in mm)




















| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | оптрит 3 | Im 4 | K | CRI | | IP |
|--|-----------------------|-----|-------|--------------|---------------------------|-----|----------|------|-------------------|------|-----|------|
| | | | | | | | | | | | | |
| Undercabinet Panel Frameless 30x10cm CCT DIM Black | 4058075 842687 | 1 | Black | Plastic (PC) | 30 000 | 5.0 | 220 | 250 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 |
| Undercabinet Panel Frameless 30x10cm CCT DIM White | 4058075 842700 | 1 | White | Plastic (PC) | 30 000 | 5.0 | 220 | 250 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 |
| Undercabinet Panel Frameless 30x20cm CCT DIM Black | 4058075 842724 | 1 | Black | Plastic (PC) | 30 000 | 7.5 | 450 | 470 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 |
| Undercabinet Panel Frameless 30x20cm CCT DIM White | 4058075 842748 | 1 | White | Plastic (PC) | 30 000 | 7.5 | 450 | 470 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 |

| | X P | MODULE NITEGRATED | CONNECTOR | ACCES- SORIES PICLUSO | [mm] | W | (Inm) | Ø d [mm] | |
|--------|------------------|-------------------------------|--|---|--|---|--|--|--|
| 15 000 | | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector cable | 300 | 100 | 8 | | 4 |
| 15 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector cable | 300 | 100 | 8 | _ | 4 |
| 15 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector cable | 300 | 200 | 8 | _ | 4 |
| 15 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector cable | 300 | 200 | 8 | - | 4 |
| | 15 000 15 000 | 15000 - 15000 - 15000 - | 15 000 — Not replaceable 15 000 — Not replaceable 15 000 — Not replaceable | 15 000 - Not replaceable Plug type C (EU) 15 000 - Not replaceable Plug type C (EU) 15 000 - Not replaceable Plug type C (EU) | 15000 - Not replaceable Plug type C (EU) Mounting equipment, Power supply, Connector cable 15000 - Not replaceable Plug type C (EU) Mounting equipment, Power supply, Connector cable 15000 - Not replaceable Plug type C (EU) Mounting equipment, Power supply, Connector cable | 15 000 - Not replaceable Plug type C (EU) Mounting equipment, Power supply, Connector cable 300 15 000 - Not replaceable Plug type C (EU) Mounting equipment, Power supply, Connector cable 300 15 000 - Not replaceable Plug type C (EU) Mounting equipment, Power supply, Connector cable 300 | 15000 - Not replaceable Plug type C (EU) Mounting equipment, Power supply, Connector cable 300 100 15000 - Not replaceable Plug type C (EU) Mounting equipment, Power supply, Connector cable 300 100 15000 - Not replaceable Plug type C (EU) Mounting equipment, Power supply, Connector cable 300 200 | 15000 - Not replaceable Plug type C (EU) Mounting equipment, Power supply, Connector cable 300 100 8 15000 - Not replaceable Plug type C (EU) Mounting equipment, Power supply, Connector cable 300 100 8 15000 - Not replaceable Plug type C (EU) Mounting equipment, Power supply, Connector cable 300 200 8 | 15000 - Not replaceable Plug type C (EU) Mounting equipment, Power supply, Connector cable 300 100 8 - 15000 - Not replaceable Plug type C (EU) Mounting equipment, Power supply, Connector cable 300 100 8 - 15000 - Not replaceable Plug type C (EU) Mounting equipment, Power supply, Connector cable 300 200 8 - |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



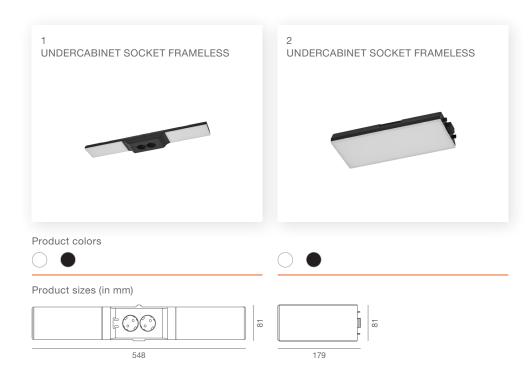





| Product name | | X NCGL = | MODULE WIEGRATED | CONNECTOR | ACCES- SORIES NCLUSED | | W | h [mm] | Ø d [mm] | |
|---|-------|----------|---------------------|------------------|----------------------------------|-----|----|-----------|----------|---|
| Undercabinet Socket Frameless Kit 830 DIM USB Black | 15000 | | Not replaceable | Plug type F (EU) | Mounting equipment, Power supply | 548 | 81 | 41 | | 6 |
| Undercabinet Socket Frameless Extension 830 DIM Black | 15000 | _ | Not replaceable | - | Mounting equipment | 179 | 81 | 21 | - | 8 |
| Undercabinet Socket Frameless Kit 830 DIM White | 15000 | - | Not replaceable | Plug type F (EU) | Mounting equipment, Power supply | 548 | 81 | 41 | - | 6 |
| Undercabinet Socket Frameless Extension 830 USB DIM White | 15000 | _ | Not replaceable | - | Mounting equipment | 179 | 81 | 21 | - | 8 |

^{* 4058075842762; 4058075842809 | ** 4058075842786; 4058075842823}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser







Product sizes (in mm)



357



557






















| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | оптрит 3 | Im Jught Source | K | CRI | | IP | |
|--|-----------------------|-----|-------|----------|---------------------------|------|----------|-----------------|-------------------|------|-----|------|--------|
| Linear Turn Connect 35cm CCT DIM Black | 4058075 842366 | 1 | Black | Aluminum | - | 6.0 | 380 | 450 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 | 15 000 |
| Linear Turn Connect 35cm CCT DIM White | 4058075 842380 | 1 | White | Aluminum | - | 6.0 | 380 | 450 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 | 15 000 |
| Linear Turn Connect 55Cm CCT DIM Black | 4058075 842403 | 1 | Black | Aluminum | - | 10.0 | 620 | 700 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 | 15 000 |
| Linear Turn Connect 55cm CCT DIM White | 4058075 842427 | 1 | White | Aluminum | _ | 10.0 | 620 | 700 | 3 000/4 000/6 500 | ≥ 80 | 110 | IP20 | 15 000 |

| Product name | X NCL = | LED MODULE INTEGRATED | CONNECTOR | ACCES- SORIES NO.LIGO | [mm] | (mm) | (h _[mm] | Ø d [mm] | |
|--|---------|-----------------------------|------------------|--|------|------|--------------------|----------------|---|
| Linear Turn Connect 35cm CCT DIM Black | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable | 357 | 60 | 24 | - | 8 |
| Linear Turn Connect 35cm CCT DIM White | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable | 357 | 60 | 24 | - | 8 |
| Linear Turn Connect 55Cm CCT DIM Black | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable | 557 | 60 | 24 | - | 8 |
| Linear Turn Connect 55cm CCT DIM White | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable | 557 | 60 | 24 | - | 8 |

^{* 4058075842366; 4058075842380 | ** 4058075842403; 4058075842427}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

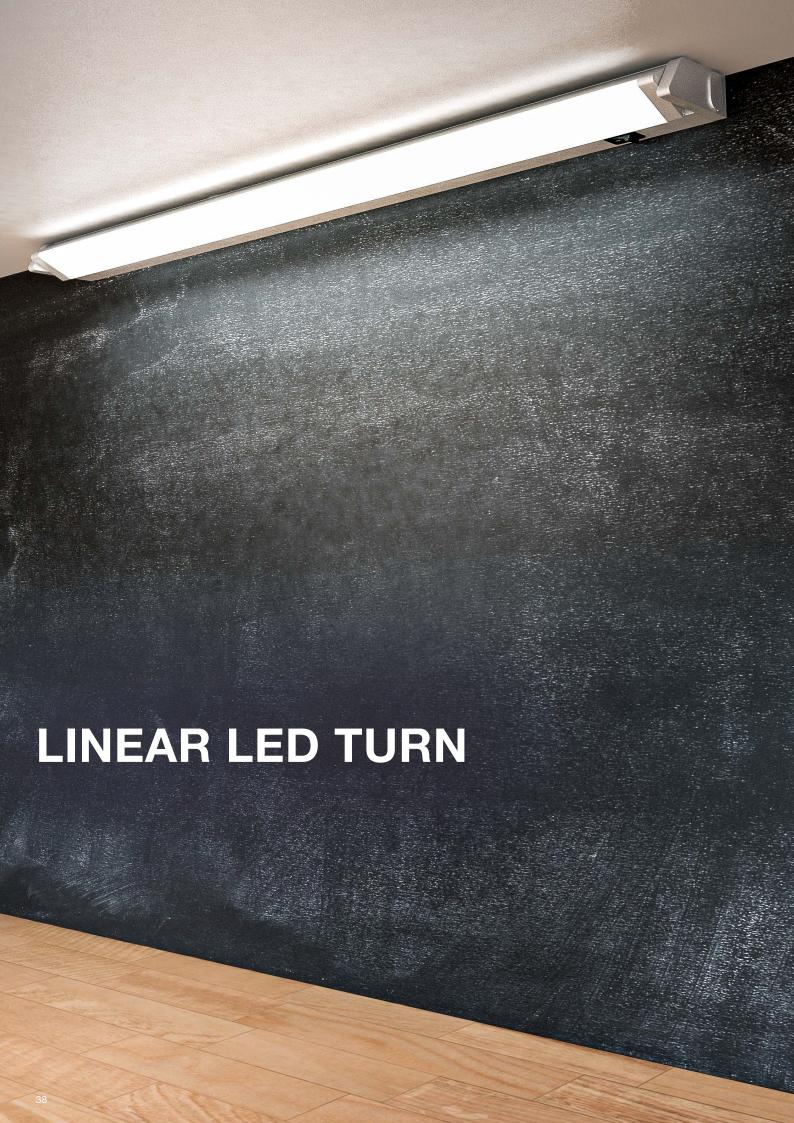























| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [b] ² | W | Im 3 | Im ught source | K | CRI | | IP |
|-----------------------|-----------------------|-----|--------|----------|---------------------------|------|-------------|----------------|-------|------|-----|------|
| Linear LED Turn 357mm | 4058075 268388 | 1 | Silver | Aluminum | 30 000 | 6.0 | 380 | 650 | 3 000 | > 80 | 100 | IP20 |
| Linear LED Turn 557mm | 4058075 227972 | 1 | Silver | Aluminum | 30 000 | 10.0 | 620 | 1 000 | 3000 | > 80 | 100 | IP20 |

| Product name | | X NCL. | MODULE NYEGRATED | CONNECTOR | ACCES- DO DO D | | W | h _[mm] | Ø d [mm] | |
|-----------------------|--------|--------|---------------------|------------------|--|-----|----|-------------------|----------------|---|
| Linear LED Turn 357mm | 30 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector cable | 357 | 60 | 24 | _ | 8 |
| Linear LED Turn 557mm | 30 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector cable | 557 | 60 | 24 | - | 8 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






























| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | Іт | Im 4 | K | CRI | | P | |
|------------------------------|-----------------------|-----|--------|----------|---------------------------|-----|-----------|------|-------|------|-----|------|---------|
| Li LEDELLE OWOOON | 4050075004444 | | 0.1 | | | | 000 | 400 | 0.000 | | | IDOO | |
| Linear LED Flat Eco 6W 3000K | 4058075 264144 | 1 | Silver | Aluminum | 20 000 | 6.0 | 300 | 480 | 3 000 | > 80 | 120 | IP20 | 100 000 |
| Linear LED Flat Eco 6W 4000K | 4058075 264328 | 1 | Silver | Aluminum | 20 000 | 6.0 | 320 | 520 | 4000 | > 80 | 120 | IP20 | 100 000 |

| Product name | X NOL. | MODULE NITEGRATED | CONNECTOR TYPE | ACCES- GOES WILLIAM | [mm] | W | h [mm] | Ø d [mm] | |
|------------------------------|--------|----------------------|------------------|--|------|----|-----------|----------------|---|
| Linear LED Flat Eco 6W 3000K | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable | 370 | 67 | 22 | _ | 8 |
| Linear LED Flat Eco 6W 4000K | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power Supply, Connector, Connector cable | 370 | 67 | 22 | - | 8 |

^{* 4058075264144 | ** 4058075264328}


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





540



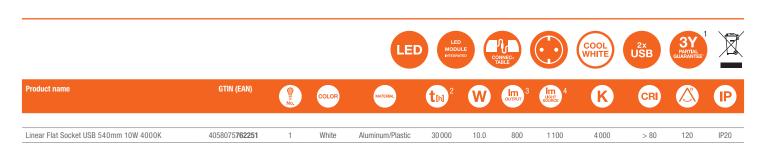

| Product name | | X PICL. | LED MODULE NITEGRATED | CONNECTOR | ACCES- SORIES NOLLED | [mm] | W [mm] | h [mm] | Ø d [mm] | |
|--|--------|---------|-----------------------------|------------------|----------------------------|------|-----------|-----------|----------------|---|
| Linear Flat Socket USB 540mm 10W 4000K | 15 000 | _ | Not replaceable | Plug type F (EU) | Mounting equipment | 540 | 81 | 42 | _ | 8 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




























| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | thi 2 | W | lm 3 | Im ught source | K | CRI | | IP |
|--|-----------------------|-----|-------|------------------|--------|-----|-------------|----------------|-------|------|-----|------|
| | | | | | | | | | | | | |
| Undercabinet Spot Puck 65mm 3 x 3W White | 4058075 791565 | 1 | White | Aluminum/Plastic | 30 000 | 3.0 | 250 | 330 | 3 000 | > 80 | 120 | IP20 |
| Undercabinet Spot Puck 65mm 3 x 3W Black | 4058075 791589 | 1 | Black | Aluminum/Plastic | 30 000 | 3.0 | 250 | 330 | 3 000 | > 80 | 120 | IP20 |

| Product name | | X Not. | LED MODULE NYEGRATED | CONNECTOR | ACCES- SOMES INCLUSED | [mm] | W [mm] | [mm] | Ø d [mm] | |
|--|--------|--------|----------------------------|---------------|-----------------------------|------|--------|------|----------------|----|
| Undercabinet Spot Puck 65mm 3 x 3W White | 15 000 | | Not replaceable | Cable, 3-pole | Mounting equipment | | _ | 19 | 65 | 24 |
| Undercabinet Spot Puck 65mm 3 x 3W Black | 15 000 | _ | Not replaceable | Cable, 3-pole | Mounting equipment | _ | - | 19 | 65 | 24 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser























| IP. | |
|-----|--|

| | No. | | | TIM " | W | OUTPUT 3 UGH | 4 K | CRI | 100 | IP) |
|--|------|-------|-------------|--------|-----|--------------|---------|------|-----|------|
| Undercabinet Spot Magnet 75mm 8.5W 3000K | | 140.5 | AL : (DL II | 20.000 | 0.5 | | 90 3000 | > 80 | 120 | IP20 |

| Product name | | X P | LED MODULE NTEGRATED | CONNECTOR | ACCES- SORIES VISCUSION | [mm] | (mm) | h [mm] | Ø d [mm] | |
|--|-------|-----|----------------------------|------------------|----------------------------------|------|------|-----------|----------------|---|
| | | | | | | | | | | |
| Undercabinet Spot Magnet 75mm 8.5W 3000K | 15000 | - | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply | - | - | 7 | 75 | 8 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser








home workshops and undercabinet areas.

 IP20 protection: Designed for indoor use, providing essential protection against accidental contact with live components.



















| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t M ² | W | 3 оптрит | lm ught source | K | CRI | | IP |
|------------------------------------|-----------------------|-----|-------|----------|-------------------------|------|----------|----------------------|-------|------|-----|------|
| LED Sensor Batten 320mm 4W 3000K | 4058075 762114 | 1 | White | Plastic | 50 000 | 4.0 | 400 | 450 | 3 000 | > 80 | 180 | IP20 |
| LED Sensor Batten 600mm 8W 3000K | 4058075 762138 | 1 | White | Plastic | 50 000 | 8.0 | 800 | 900 | 3 000 | > 80 | 180 | IP20 |
| LED Sensor Batten 1200mm 14W 3000K | 4058075 762152 | 1 | White | Plastic | 50 000 | 14.0 | 1 400 | 1 600 | 3 000 | > 80 | 180 | IP20 |

| Product name | | X P | LED MODULE NYEGRATED | CONNECTOR | ACCES- SORIES WILLIES | [mm] | W [mm] | in [mm] | Ø d [mm] | |
|------------------------------------|---------|-----|----------------------------|------------------|-----------------------------|------|--------|---------|----------------|---|
| LED Sensor Batten 320mm 4W 3000K | 100 000 | _ | Not replaceable | Plug type C (EU) | _ | 313 | 28 | 36 | _ | 8 |
| LED Sensor Batten 600mm 8W 3000K | 100 000 | - | Not replaceable | Plug type C (EU) | - | 573 | 28 | 36 | - | 8 |
| LED Sensor Batten 1200mm 14W 3000K | 100 000 | - | Not replaceable | Plug type C (EU) | - | 1173 | 28 | 36 | - | 8 |


^{* 4058075762114 | ** 4058075762138 | *** 4058075762114; 4058075762152 | **** 4058075762152}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






















| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t _[h] ² | W | lm 3 | Im ught source | K | CRI | | IP |
|--------------------------------------|-----------------------|-----|--------|----------|-------------------------------|------|-------------|----------------|------|-----|-----|------|
| LED Value Batten 600 mm 10 W 4000 K | 4058075 268142 | 1 | Silver | Aluminum | 30 000 | 10.0 | 1 000 | 1 300 | 4000 | ≥80 | 150 | IP20 |
| LED Value Batten 1200 mm 20 W 4000 K | 4058075 268180 | 1 | Silver | Aluminum | 30 000 | 20.0 | 2000 | 2500 | 4000 | ≥80 | 150 | IP20 |
| LED Value Batten 1500 mm 24 W 4000 K | 4058075 268241 | 1 | Silver | Aluminum | 30 000 | 24.0 | 2400 | 3 000 | 4000 | ≥80 | 150 | IP20 |

| Product name | | NGL. | MODULE NYEGRAYED | CONNECTOR | ACCES- SORIES POLUCE | [mm] | W [mm] | h [mm] | Ø d [mm] | |
|--------------------------------------|---------|------|---------------------|----------------|---------------------------------|-------|--------|-----------|----------------|----|
| LED Value Batten 600 mm 10 W 4000 K | 100 000 | _ | Not replaceable | Screw terminal | Mounting screws, Plastic dowels | 634 | 29 | 44 | | 20 |
| LED Value Batten 1200 mm 20 W 4000 K | 100 000 | _ | Not replaceable | Screw terminal | Mounting screws, Plastic dowels | 1 234 | 29 | 44 | _ | 20 |
| LED Value Batten 1500 mm 24 W 4000 K | 100 000 | _ | Not replaceable | Screw terminal | Mounting screws, Plastic dowels | 1 534 | 29 | 44 | - | 10 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



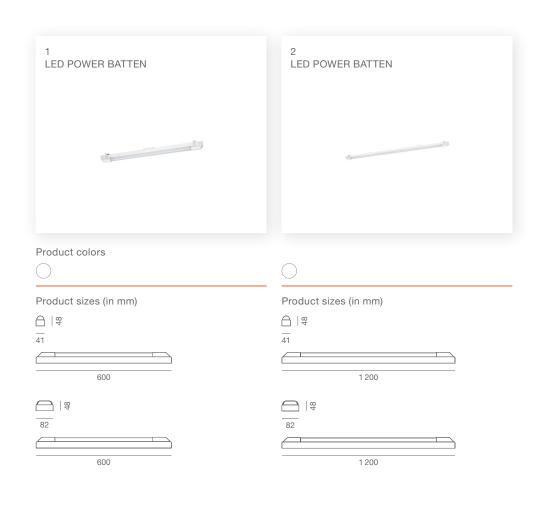











| A |
|-------------|
| ∕ ⊢• |
| |


| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | оптрит 3 | Im 4 | K | CRI | | IP |
|--------------------------------------|-----------------------|-----|-------|----------|---------------------------|------|----------|---------|-------|-----|-----|------|
| | | | | | | | | | | | | |
| LED Power Batten 600 mm 12 W 3000 K | 4058075 266476 | 1 | White | Steel | 25 000 | 12.0 | 1 260 | 1 540 | 3 000 | ≥80 | 110 | IP20 |
| LED Power Batten 600 mm 12 W 4000 K | 4058075 266490 | 1 | White | Steel | 25 000 | 12.0 | 1 320 | 1 620 | 4000 | ≥80 | 110 | IP20 |
| LED Power Batten 600 mm 25 W 3000 K | 4058075 266513 | 1 | White | Steel | 25 000 | 25.0 | 2375 | 3 2 2 0 | 3 000 | ≥80 | 110 | IP20 |
| LED Power Batten 600 mm 25 W 4000 K | 4058075 266537 | 1 | White | Steel | 25 000 | 25.0 | 2500 | 3 380 | 4000 | ≥80 | 110 | IP20 |
| LED Power Batten 1200 mm 25 W 3000 K | 4058075 266575 | 2 | White | Steel | 25 000 | 25.0 | 2600 | 3 2 2 0 | 3 000 | ≥80 | 110 | IP20 |
| LED Power Batten 1200 mm 25 W 4000 K | 4058075 266599 | 2 | White | Steel | 25 000 | 25.0 | 2700 | 3 380 | 4000 | ≥80 | 110 | IP20 |
| LED Power Batten 1200 mm 50 W 3000 K | 4058075 266636 | 2 | White | Steel | 25 000 | 50.0 | 4845 | 6 000 | 3 000 | ≥80 | 110 | IP20 |
| LED Power Batten 1200 mm 50 W 4000 K | 4058075 266667 | 2 | White | Steel | 25 000 | 50.0 | 5100 | 6 2 6 0 | 4000 | ≥80 | 110 | IP20 |
| | | | | | | | | | | | | |

| Product name | | X NCL. | MODULE NYEGRATED | CONNECTOR TYPE | ACCES- SORIES NOLLINES | [mm] | W | in [mm] | Ø d [mm] | |
|--------------------------------------|-------|--------|---------------------|-------------------|------------------------------|-------|----|---------|----------------|---|
| LED Power Batten 600 mm 12 W 3000 K | 12500 | | Not replaceable | Push fit terminal | Mounting equipment | 600 | 41 | 48 | | 8 |
| LED Power Batten 600 mm 12 W 4000 K | 12500 | _ | Not replaceable | Push fit terminal | Mounting equipment | 600 | 41 | 48 | _ | 8 |
| LED Power Batten 600 mm 24 W 3000 K | 12500 | - | Not replaceable | Push fit terminal | Mounting equipment | 600 | 82 | 48 | - | 8 |
| LED Power Batten 600 mm 24 W 4000 K | 12500 | - | Not replaceable | Push fit terminal | Mounting equipment | 600 | 82 | 48 | - | 8 |
| LED Power Batten 1200 mm 24 W 3000 K | 12500 | - | Not replaceable | Push fit terminal | Mounting equipment | 1 200 | 41 | 48 | - | 8 |
| LED Power Batten 1200 mm 24 W 4000 K | 12500 | - | Not replaceable | Push fit terminal | Mounting equipment | 1 200 | 41 | 48 | - | 8 |
| LED Power Batten 1200 mm 50 W 3000 K | 12500 | - | Not replaceable | Push fit terminal | Mounting equipment | 1 200 | 82 | 48 | - | 8 |
| LED Power Batten 1200 mm 50 W 4000 K | 12500 | _ | Not replaceable | Push fit terminal | Mounting equipment | 1 200 | 82 | 48 | _ | 8 |


^{* 4058075266476; 4058075266513; 4058075266575; 4058075266636 | ** 4058075266490; 4058075266537; 4058075266599; 4058075266667}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product sizes (in mm)



873

1 173






















| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | lm 3 | Im 4 | K | CRI | \(\hat{\chi}\) | P |
|---------------------------------------|-----------------------|-----|-------|--------------|---------------------------|------|-------------|-------|-------|-----|----------------|------|
| | | | | | | | | | | | | |
| LED Switch Batten 300 mm 4 W 3000 K | 4058075 266681 | 1 | White | Plastic (PC) | 30 000 | 4.0 | 450 | 500 | 3 000 | ≥80 | 155 | IP20 |
| LED Switch Batten 300 mm 4 W 4000 K | 4058075 266704 | 1 | White | Plastic (PC) | 30 000 | 4.0 | 450 | 500 | 4000 | ≥80 | 155 | IP20 |
| LED Switch Batten 600 mm 8 W 3000 K | 4058075 266728 | 1 | White | Plastic (PC) | 30 000 | 8.0 | 900 | 950 | 3 000 | ≥80 | 155 | IP20 |
| LED Switch Batten 600 mm 8 W 4000 K | 4058075 266742 | 1 | White | Plastic (PC) | 30 000 | 8.0 | 900 | 950 | 4000 | ≥80 | 155 | IP20 |
| LED Switch Batten 900 mm 10 W 3000 K | 4058075 266865 | 1 | White | Plastic (PC) | 30 000 | 10.0 | 1100 | 1 300 | 3 000 | ≥80 | 155 | IP20 |
| LED Switch Batten 900 mm 10 W 4000 K | 4058075 266964 | 1 | White | Plastic (PC) | 30 000 | 10.0 | 1100 | 1 300 | 4000 | ≥80 | 155 | IP20 |
| LED Switch Batten 1200 mm 14 W 3000 K | 4058075 266988 | 1 | White | Plastic (PC) | 30 000 | 14.0 | 1 600 | 1 800 | 3 000 | ≥80 | 155 | IP20 |
| LED Switch Batten 1200 mm 14 W 4000 K | 4058075 267046 | 1 | White | Plastic (PC) | 30 000 | 14.0 | 1 600 | 1 800 | 4000 | ≥80 | 155 | IP20 |

| Product name | | X Not. | MODULE NTEGRATED | CONNECTOR | ACCES- SORIES INCLUSED | [mm] | (mm) | ţh _[mm] | Ø d [mm] | 3 |
|---------------------------------------|---------|--------|---------------------|------------------|---|-------|------|--------------------|----------------|----------|
| | | | | | | | | | | |
| LED Switch Batten 300 mm 4 W 3000 K | 100 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector cable | 313 | 22 | 30 | - | 8 |
| LED Switch Batten 300 mm 4 W 4000 K | 100 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector cable | 313 | 22 | 30 | - | 8 |
| LED Switch Batten 600 mm 8 W 3000 K | 100 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector cable | 573 | 22 | 30 | - | 8 |
| LED Switch Batten 600 mm 8 W 4000 K | 100 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector cable | 573 | 22 | 30 | - | 8 |
| LED Switch Batten 900 mm 10 W 3000 K | 100 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector cable | 873 | 22 | 30 | - | 8 |
| LED Switch Batten 900 mm 10 W 4000 K | 100 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector cable | 873 | 22 | 30 | - | 8 |
| LED Switch Batten 1200 mm 14 W 3000 K | 100 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector cable | 1 173 | 22 | 30 | - | 8 |
| LED Switch Batten 1200 mm 14 W 4000 K | 100 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Power supply, Connector cable | 1 173 | 22 | 30 | - | 8 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





















| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | lm 3 | Im ught source | K | CRI | | P |
|--------------------------------|-----------------------|-----|-------|--------------|---------------------------|------|-------------|----------------|-------|------|-----|------|
| | | | | | | | | | | | | |
| TubeKIT LED 600mm 8.9W 3000K | 4058075 264991 | 1 | White | Plastic (PC) | 30 000 | 8.9 | 900 | 1 050 | 3 000 | > 80 | 160 | IP20 |
| TubeKIT LED 600mm 8.9W 4000K | 4058075 265011 | 1 | White | Plastic (PC) | 30 000 | 8.9 | 900 | 1100 | 4000 | > 80 | 160 | IP20 |
| TubeKIT LED 1200mm 19W 3000K | 4058075 265035 | 1 | White | Plastic (PC) | 30 000 | 19.0 | 1 900 | 2200 | 3 000 | > 80 | 150 | IP20 |
| TubeKIT LED 1200mm 19W 4000K | 4058075 265059 | 1 | White | Plastic (PC) | 30 000 | 19.0 | 2090 | 2400 | 4000 | > 80 | 150 | IP20 |
| TubeKIT LED 1500mm 21.5W 3000K | 4058075 265073 | 1 | White | Plastic (PC) | 30 000 | 21.5 | 2150 | 2500 | 3 000 | > 80 | 150 | IP20 |
| TubeKIT LED 1500mm 21.5W 4000K | 4058075 265097 | 1 | White | Plastic (PC) | 30 000 | 21.5 | 2365 | 2600 | 4000 | > 80 | 150 | IP20 |
| | | | | | | | | | | | | |

| | X NCL. | LED MODULE INTEGRATED | CONNECTOR | ACCES- SORIES INCLUDED | [mm] | (mm) | †h [mm] | Ø d [mm] | |
|--------|---|---|---|--|---|--|---|--|--|
| | | | | | | | | | |
| 15 000 | - | Not replaceable | Plug type C (EU) | Mounting equipment, Brackets, Hook | 600 | 35 | 37 | - | 8 |
| 15 000 | - | Not replaceable | Plug type C (EU) | Mounting equipment, Brackets, Hook | 600 | 35 | 37 | - | 8 |
| 15 000 | | Not replaceable | Plug type C (EU) | Mounting equipment, Brackets, Hook | 1 200 | 35 | 37 | - | 8 |
| 15 000 | - | Not replaceable | Plug type C (EU) | Mounting equipment, Brackets, Hook | 1 200 | 35 | 37 | - | 8 |
| 15 000 | _ | Not replaceable | Plug type C (EU) | Mounting equipment, Brackets, Hook | 1 500 | 35 | 37 | - | 8 |
| 15 000 | | Not replaceable | Plug type C (EU) | Mounting equipment, Brackets, Hook | 1 500 | 35 | 37 | - | 8 |
| | 15000 15000 15000 15000 15000 | 15000 - 15000 - 15000 - 15000 - 15000 - | 15000 - Not replaceable | 15000 - Not replaceable Plug type C (EU) | 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook | 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 600 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 600 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 1200 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 1200 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 1500 | 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 600 35 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 600 35 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 1200 35 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 1200 35 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 1500 35 | 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 600 35 37 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 600 35 37 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 1200 35 37 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 1200 35 37 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 1500 35 37 | 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 600 35 37 - 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 600 35 37 - 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 1200 35 37 - 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 1200 35 37 - 15000 - Not replaceable Plug type C (EU) Mounting equipment, Brackets, Hook 1200 35 37 - |

^{* 4058075264991; 4058075265035; 4058075265073 | ** 4058075265011; 4058075265059; 4058075265097}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




Illuminate your moisture-prone areas with our innovative DAMP-PROOF LUMINAIRES designed for reliable performance and durability. Ideal for cellars, garages, and other challenging environments, these luminaires provide bright, consistent light where it's needed most.











| Product name | | X O | LED MODULE INTEGRATED | CONNECTOR | ACCES- SORIES HOLICO | [mm] | (mm) | h [mm] | Ø d [mm] | |
|--|---------|-----|-----------------------------|-----------|---|-------|------|-----------|----------------|---|
| SMART ⁺ Wifi Submarine 120cm TW | 100 000 | 1 | _ | _ | Mounting screws, Plastic dowels, Mounting equipment | 1 261 | 66 | 75 | _ | 9 |


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser
































| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t M ² | W | lm 3 | Im UGHT SOURCE | K | CRI | | IP |
|----------------------------------|-----------------------|-----|-------|----------|-------------------------|------|-------------|----------------|------|-----|-----|------|
| Submarine Sensor 60cm 8W 4000K | 4058075 576377 | 1 | Gray | Plastic | 30 000 | 8.0 | 650 | 800 | 4000 | ≥80 | 140 | IP65 |
| Submarine Sensor 120cm 16W 4000K | 4058075 576391 | 1 | Gray | Plastic | 30 000 | 16.0 | 1 600 | 1 800 | 4000 | ≥80 | 140 | IP65 |
| Submarine Sensor 150cm 19W 4000K | 4058075 576414 | 1 | Gray | Plastic | 30 000 | 19.0 | 1 900 | 2200 | 4000 | ≥80 | 140 | IP65 |

| Product name | | X PROL. | LED MODULE NTEGRATED | CONNECTOR | ACCES- SORIES INCLUDED | [mm] | W [mm] | h [mm] | Ø d [mm] | a |
|----------------------------------|---------|---------|----------------------------|-----------------------------|---|-------|--------|-----------|----------------|----------|
| Submarine Sensor 60cm 8W 4000K | 100 000 | 1 | | Terminal, 3-Pole (L, N, PE) | Mounting screws, Plastic dowels, Mounting equipment | 651 | 66 | 75 | _ | 10 |
| Submarine Sensor 120cm 16W 4000K | 100 000 | 1 | - | Terminal, 3-Pole (L, N, PE) | Mounting screws, Plastic dowels, Mounting equipment | 1 261 | 66 | 75 | | 9 |
| Submarine Sensor 150cm 19W 4000K | 100 000 | 1 | - | Terminal, 3-Pole (L, N, PE) | Mounting screws, Plastic dowels, Mounting equipment | 1 561 | 66 | 75 | - | 6 |

^{* 4058075576377 | ** 4058075576391; 4058075576414}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



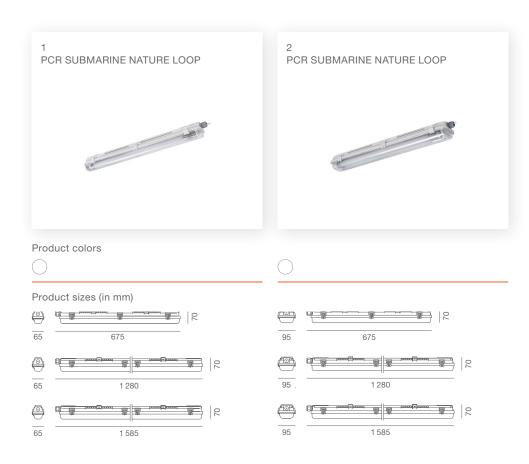

















| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t _[h] ² | W | lm 3 | Im UGHT SOURCE | K | CRI | | IP |
|---|-----------------------|-----|-------|--------------|-------------------------------|------|-------------|----------------------|------|------|-----|------|
| | | | | | | | | | | | | |
| Submarine Recycled Plastic 60 1 X 7W 840 G13 T8 | 4058075 830998 | 1 | White | Plastic (PC) | 40 000 | 7.0 | 800 | 1100 | 4000 | > 80 | 120 | IP65 |
| Submarine Recycled Plastic 60 2 X 7W 840 G13 T8 | 4058075 831018 | 2 | White | Plastic (PC) | 40 000 | 14.0 | 1 600 | 2200 | 4000 | > 80 | 120 | IP65 |
| Submarine Recycled Plastic 120 1 X 13.5W 840 G13 T8 | 4058075 831032 | 1 | White | Plastic (PC) | 40 000 | 13.5 | 1 550 | 2100 | 4000 | > 80 | 120 | IP65 |
| Submarine Recycled Plastic 120 2 X 13.5W 840 G13 T8 | 4058075 831056 | 2 | White | Plastic (PC) | 40 000 | 27.0 | 3100 | 4200 | 4000 | > 80 | 120 | IP65 |
| Submarine Recycled Plastic 150 1 X 20W 840 G13 T8 | 4058075 831070 | 1 | White | Plastic (PC) | 40 000 | 20.0 | 2300 | 3100 | 4000 | > 80 | 120 | IP65 |
| Submarine Recycled Plastic 150 2 X 20W 840 G13 T8 | 4058075 831094 | 2 | White | Plastic (PC) | 40 000 | 40.0 | 4600 | 6200 | 4000 | > 80 | 120 | IP65 |
| | | | | | | | | | | | | |

| Product name | | NCL. | LED MODULE WITEGRATED | CONNECTOR | ACCES- SORIES NCLUDED | [mm] | W [mm] | h | Ø d [mm] | |
|---|---------|------|-----------------------------|-----------------------------|---|-------|--------|----|----------------|----|
| | | | | | | | | | | |
| Submarine Recycled Plastic 60 1 X 7W 840 G13 T8 | 100 000 | - | - | Terminal, 3-Pole (L, N, PE) | Mounting clips, Mounting screws, Dowels | 675 | 65 | 70 | - | 10 |
| Submarine Recycled Plastic 60 2 X 7W 840 G13 T8 | 100 000 | - | - | Terminal, 3-Pole (L, N, PE) | Mounting clips, Mounting screws, Dowels | 675 | 95 | 70 | - | 6 |
| Submarine Recycled Plastic 120 1 X 13.5W 840 G13 T8 | 100 000 | - | - | Terminal, 3-Pole (L, N, PE) | Mounting clips, Mounting screws, Dowels | 1 280 | 65 | 70 | - | 9 |
| Submarine Recycled Plastic 120 2 X 13.5W 840 G13 T8 | 100 000 | - | - | Terminal, 3-Pole (L, N, PE) | Mounting clips, Mounting screws, Dowels | 1 280 | 95 | 70 | - | 6 |
| Submarine Recycled Plastic 150 1 X 20W 840 G13 T8 | 100 000 | _ | - | Terminal, 3-Pole (L, N, PE) | Mounting clips, Mounting screws, Dowels | 1 585 | 65 | 70 | - | 6 |
| Submarine Recycled Plastic 150 2 X 20W 840 G13 T8 | 100 000 | _ | - | Terminal, 3-Pole (L, N, PE) | Mounting clips, Mounting screws, Dowels | 1 585 | 95 | 70 | - | 6 |
| | | | | | | | | | | |


^{* 4058075830998; 4058075831032; 4058075831070 | ** 4058075831018; 4058075831056; 4058075831094}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






















| \ | IP | |
|---|----|--|

| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | th) ² | W | lm 3 | Im ught source | K | CRI | | IP |
|--|-----------------------|-----|-------|----------|------------------|------|-------------|----------------|------|-----|-----|------|
| | | | | | | | | | | | | |
| Submarine Through Wiring 120cm 15W 4000K | 4058075 576438 | 1 | Gray | Plastic | 30 000 | 15.0 | 1 600 | 1 800 | 4000 | ≥80 | 140 | IP65 |
| Submarine Through Wiring 150cm 19W 4000K | 4058075 576452 | 1 | Gray | Plastic | 30 000 | 19.0 | 1 900 | 2200 | 4000 | ≥80 | 140 | IP65 |

| Product name | | X NCL. | LED MODULE WIEGRATED | CONNECTOR | ACCES- SONES INCLIED | [mm] | W [mm] | h [mm] | Ø d [mm] | |
|--|---------|--------|----------------------------|-----------------------------|---|-------|--------|-----------|----------------|---|
| Submarine Through Wiring 120cm 15W 4000K | 100 000 | 1 | | Terminal, 3-Pole (L, N, PE) | Mounting screws, Plastic dowels, Mounting equipment | 1 261 | 66 | 75 | | |
| Submarine Through Wiring 150cm 19W 4000K | 100 000 | 1 | - | Terminal, 3-Pole (L, N, PE) | Mounting screws, Plastic dowels, Mounting equipment | 1 561 | 66 | 75 | - | 6 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser


























| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t M ² | W | lm 3 | Im ught source | K | CRI | | IP |
|-------------------------------------|-----------------------|-----|-------|--------------|-------------------------|------|-------------|----------------|------|-----|-----|------|
| Submarine Integrated 0.6M 18W 4000K | 4058075 260351 | 1 | Gray | Plastic (PC) | 30 000 | 18.0 | 1 500 | 1 900 | 4000 | ≥80 | 120 | IP65 |
| Submarine Integrated 1.2M 36W 4000K | 4058075 260412 | 1 | Gray | Plastic (PC) | 30 000 | 36.0 | 3 000 | 3 600 | 4000 | ≥80 | 120 | IP65 |
| Submarine Integrated 1.5M 48W 4000K | 4058075 260498 | 1 | Gray | Plastic (PC) | 30 000 | 48.0 | 4000 | 5 000 | 4000 | ≥80 | 120 | IP65 |

| Product name | | X P | LED MODULE INTEGRATED | CONNECTOR | ACCES- SORIES INCLUDES | [mm] | W | h | Ø d [mm] | |
|-------------------------------------|--------|-----|-----------------------------|-------------------------|---|-------|----|----|----------------|---|
| Submarine Integrated 0.6M 18W 4000K | 25 000 | - | Not replaceable | Terminal, 2-Pole (L, N) | Mounting screws, Plastic dowels, Mounting equipment | 590 | 86 | 66 | - | 8 |
| Submarine Integrated 1.2M 36W 4000K | 25 000 | - | Not replaceable | Terminal, 2-Pole (L, N) | Mounting screws, Plastic dowels, Mounting equipment | 1180 | 86 | 66 | - | 8 |
| Submarine Integrated 1.5M 48W 4000K | 25 000 | - | Not replaceable | Terminal, 2-Pole (L, N) | Mounting screws, Plastic dowels, Mounting equipment | 1 480 | 86 | 72 | - | 8 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser
























| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t _M ² | W | 3 очтрит | lm ught source | K | CRI | | IP |
|--|-----------------------|-----|-------|--------------|------------------------------------|------|----------|----------------------|------|-----|-----|------|
| Submarine Integrated Slim Value 0.6M 10W 4000K | 4058075 266391 | 1 | White | Plastic (PC) | 30 000 | 10.0 | 900 | 1 200 | 4000 | ≥80 | 120 | IP65 |
| Submarine Integrated Slim Value 1.2M 18W 4000K | 4058075 266414 | 1 | White | Plastic (PC) | 30 000 | 18.0 | 1 600 | 1 900 | 4000 | ≥80 | 120 | IP65 |
| Submarine Integrated Slim Value 1.5M 24W 4000K | 4058075 266438 | 1 | White | Plastic (PC) | 30 000 | 24.0 | 2160 | 3 000 | 4000 | ≥80 | 120 | IP65 |

| Product name | | Nor = | MODULE WEGGRATED | CONNECTOR | ACCES- SOMES WOLDER | [mm] | W | h [mm] | Ø d [mm] | |
|--|--------|-------|---------------------|-------------------------|---|-------|----|-----------|----------|----|
| Submarine Integrated Slim Value 0.6M 10W 4000K | 25 000 | - | Not replaceable | Terminal, 2-Pole (L, N) | Mounting screws, Plastic dowels, Mounting equipment | 715 | 53 | 35 | - | 20 |
| Submarine Integrated Slim Value 1.2M 18W 4000K | 25 000 | _ | Not replaceable | Terminal, 2-Pole (L, N) | Mounting screws, Plastic dowels, Mounting equipment | 1 245 | 53 | 35 | - | 20 |
| Submarine Integrated Slim Value 1.5M 24W 4000K | 25 000 | - | Not replaceable | Terminal, 2-Pole (L, N) | Mounting screws, Plastic dowels, Mounting equipment | 1 525 | 53 | 35 | - | 20 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



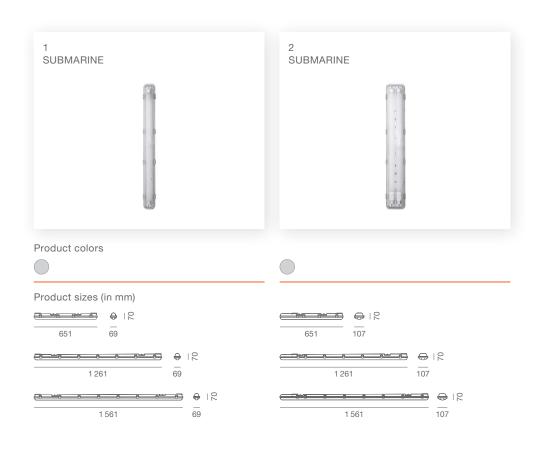






















| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | lm 3 | Im ught source | K | CRI | | IP |
|-------------------------|-----------------------|-----|-------|---------------|---------------------------|------|-------------|----------------|------|-----|-----|------|
| | | | | | | | | | | | | |
| Submarine 1 x 7W 4000K | 4058075 303928 | 1 | Gray | Plastic (ABS) | 30 000 | 7.0 | 700 | 800 | 4000 | ≥80 | 140 | IP65 |
| Submarine 2 x 7W 4000K | 4058075 303980 | 2 | Gray | Plastic (ABS) | 30 000 | 14.0 | 1 300 | 1 600 | 4000 | ≥80 | 120 | IP65 |
| Submarine 1 x 15W 4000K | 4058075 303942 | 1 | Gray | Plastic (ABS) | 30 000 | 15.0 | 1 700 | 1 800 | 4000 | ≥80 | 140 | IP65 |
| Submarine 2 x 15W 4000K | 4058075 304000 | 2 | Gray | Plastic (ABS) | 30 000 | 30.0 | 3 000 | 3600 | 4000 | ≥80 | 120 | IP65 |
| Submarine 1 x 19W 4000K | 4058075 303966 | 1 | Gray | Plastic (ABS) | 30 000 | 19.0 | 2050 | 2200 | 4000 | ≥80 | 140 | IP65 |
| Submarine 2 x 19W 4000K | 4058075 304024 | 2 | Gray | Plastic (ABS) | 30 000 | 38.0 | 3 800 | 4400 | 4000 | ≥80 | 120 | IP65 |
| | | | | | | | | | | | | |

| | X NCL. | LED MODULE NTEGRATED | CONNECTOR | ACCES- SORIES INCLUEED | [mm] | W [mm] | †h [mm] | Ø d [mm] | 3 |
|---------|---|--|--------------------------------------|---|---|--|---|--|--|
| | | | | | | | | | |
| 100 000 | _ | - | Terminal, 3-Pole (L, N, PE) | Mounting screws, Plastic dowels, Mounting equipment | 651 | 66 | 75 | - | 10 |
| 100000 | _ | _ | Terminal, 3-Pole (L, N, PE) | Mounting screws, Plastic dowels, Mounting equipment | 651 | 105 | 75 | - | 6 |
| 100 000 | _ | - | Terminal, 3-Pole (L, N, PE) | Mounting screws, Plastic dowels, Mounting equipment | 1 261 | 66 | 75 | - | 9 |
| 100 000 | _ | - | Terminal, 3-Pole (L, N, PE) | Mounting screws, Plastic dowels, Mounting equipment | 1 261 | 105 | 75 | _ | 6 |
| 100 000 | _ | - | Terminal, 3-Pole (L, N, PE) | Mounting screws, Plastic dowels, Mounting equipment | 1 561 | 66 | 75 | - | 6 |
| 100 000 | _ | - | Terminal, 3-Pole (L, N, PE) | Mounting screws, Plastic dowels, Mounting equipment | 1 561 | 105 | 75 | - | 6 |
| | 100 000 100 000 100 000 100 000 100 000 | 100000 - 100000 - 100000 - 100000 - 100000 - | 100000 100000 100000 100000 | 100 000 Terminal, 3-Pole (L, N, PE) | 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment | 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 651 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 651 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1261 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1261 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1561 | 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 651 66 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 651 105 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1261 66 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1261 105 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1561 66 | 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 651 66 75 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 651 105 75 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1261 66 75 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1261 105 75 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1561 66 75 | 100 000 - - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 651 66 75 - 100 000 - - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 651 105 75 - 100 000 - - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1261 66 75 - 100 000 - - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1261 105 75 - 100 000 - - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1561 66 75 - |

^{* 4058075303928; 4058075303942; 4058075303966 | ** 4058075303980; 4058075304000; 4058075304024}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



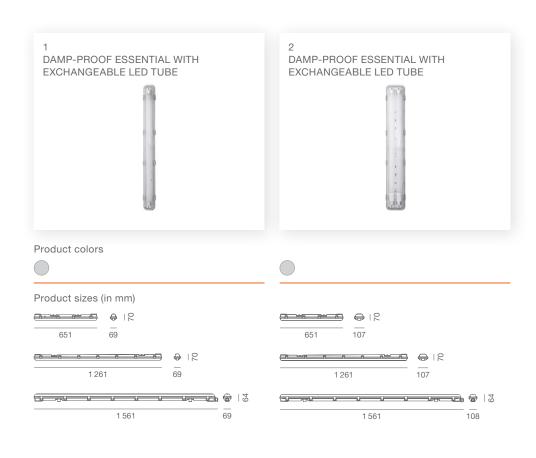














| X | |
|---|--|
| | |

| GTIN (EAN) | No. | COLOR | MATERIAL | t _M ² | W | lm 3 | Im 4 | K | CRI | | IP |
|-----------------------|---|---|---|---|---|---|---|--|---|---|---|
| | | | | | | | | | | | |
| 4058075 762534 | 1 | Gray | Plastic | 25 000 | 7.0 | 640 | 780 | 4000 | ≥80 | 120 | IP65 |
| 4058075 762558 | 2 | Gray | Plastic | 25 000 | 14.0 | 1 200 | 1 560 | 4000 | ≥80 | 120 | IP65 |
| 4058075 762572 | 1 | Gray | Plastic | 25 000 | 15.0 | 1 300 | 1 650 | 4 000 | ≥80 | 120 | IP65 |
| 4058075 762596 | 2 | Gray | Plastic | 25 000 | 30.0 | 2400 | 3 300 | 4000 | ≥80 | 120 | IP65 |
| 4099854 288104 | 1 | Gray | Plastic (PC) | 25 000 | 19.0 | 1 700 | 2185 | 4000 | ≥80 | 120 | IP65 |
| 4099854 288128 | 2 | Gray | Plastic (PC) | 25 000 | 38.0 | 3 400 | 4370 | 4000 | ≥80 | 120 | IP65 |
| | 4058075 762534 4058075 762558 4058075 762572 4058075 762596 4099854 288104 | 4058075 762534 1 4058075 762558 2 4058075 762572 1 4058075 762596 2 4099854 288104 1 | 4058075 762534 1 Gray 4058075 762558 2 Gray 4058075 762572 1 Gray 4058075 762596 2 Gray 409854288104 1 Gray | 4058075 762534 1 Gray Plastic 4058075 762558 2 Gray Plastic 4058075 762572 1 Gray Plastic 4058075 762596 2 Gray Plastic 4099854 288104 1 Gray Plastic (PC) | 4058075762534 1 Gray Plastic 25 000 4058075762558 2 Gray Plastic 25 000 4058075762572 1 Gray Plastic 25 000 4058075762596 2 Gray Plastic 25 000 409854288104 1 Gray Plastic (PC) 25 000 | 4058075 762534 1 Gray Plastic 25000 7.0 4058075 762558 2 Gray Plastic 25000 14.0 4058075 762572 1 Gray Plastic 25000 15.0 4058075 762596 2 Gray Plastic 25000 30.0 4099854 288104 1 Gray Plastic (PC) 25000 19.0 | 4058075 762534 1 Gray Plastic 25 000 7.0 640 4058075 762558 2 Gray Plastic 25 000 14.0 1 200 4058075 762572 1 Gray Plastic 25 000 15.0 1 300 4058075 762596 2 Gray Plastic 25 000 30.0 2400 409854288104 1 Gray Plastic (PC) 25 000 19.0 1700 | A058075762534 1 Gray Plastic 25000 7.0 640 780 | 4058075762534 1 Gray Plastic 25 000 7.0 640 780 4 000 | 4058075 762534 1 Gray Plastic 25 000 7.0 640 780 4 000 ≥80 4058075 762558 2 Gray Plastic 25 000 14.0 1 200 1 560 4 000 ≥80 4058075 762572 1 Gray Plastic 25 000 15.0 1 300 1 650 4 000 ≥80 4058075 762596 2 Gray Plastic 25 000 30.0 2 400 3 300 4 000 ≥80 409854288104 1 Gray Plastic (PC) 25 000 19.0 1 700 2 185 4 000 ≥80 409854288104 1 Gray Plastic (PC) 25 000 19.0 1 700 2 185 4 000 ≥80 409854288104 1 Gray Plastic (PC) 25 000 19.0 1 700 2 185 4 000 ≥80 409854288104 1 Gray Plastic (PC) 25 000 19.0 1 700 2 185 4 000 ≥80 409854288104 1 Gray Plastic (PC) 25 000 19.0 1 700 2 185 4 000 ≥80 409854288104 1 Gray Plastic (PC) 25 000 19.0 1 700 2 185 4 000 ≥80 4 000 2 80 | COLOR WATERIAL COLOR WATERIAL COLOR WATERIAL COLOR WATERIAL COLOR COLOR |


| Product name | | X NCL. | LED MODULE INTEGRATED | CONNECTOR | ACCES- SORIES INCLUEED | [mm] | W [mm] | ţh [mm] | Ø d [mm] | 3 |
|---|-------|--------|-----------------------------|---------------|---|-------|-----------|------------|----------------|----------|
| | | | | | | | | | | |
| Damp Proof Essential 7W 600mm 4000K | 12500 | - | - | Cable, 3-pole | Mounting screws, Plastic dowels, Mounting equipment | 651 | 69 | 64 | - | 8 |
| Damp Proof Essential 2x7W 600mm 4000K | 12500 | _ | - | Cable, 3-pole | Mounting screws, Plastic dowels, Mounting equipment | 651 | 108 | 64 | - | 6 |
| Damp Proof Essential 15W 1200mm 4000K | 12500 | _ | - | Cable, 3-pole | Mounting screws, Plastic dowels, Mounting equipment | 1 261 | 69 | 64 | - | 8 |
| Damp Proof Essential 2x15W 1200mm 4000K | 12500 | _ | - | Cable, 3-pole | Mounting screws, Plastic dowels, Mounting equipment | 1 261 | 108 | 64 | - | 6 |
| Damp proof Essential 1x19W 1500mm 840 | 12500 | _ | - | Cable, 2-pole | Mounting screws, Plastic dowels, Mounting clips | 1 561 | 69 | 64 | - | 6 |
| Damp proof Essential 2x19W 1500mm 840 | 12500 | _ | - | Cable, 2-pole | Mounting screws, Plastic dowels, Mounting clips | 1 561 | 108 | 64 | - | 6 |

^{* 4058075762534; 4058075762572; 4099854288104 | ** 4058075762558; 4058075762596; 4099854288128}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

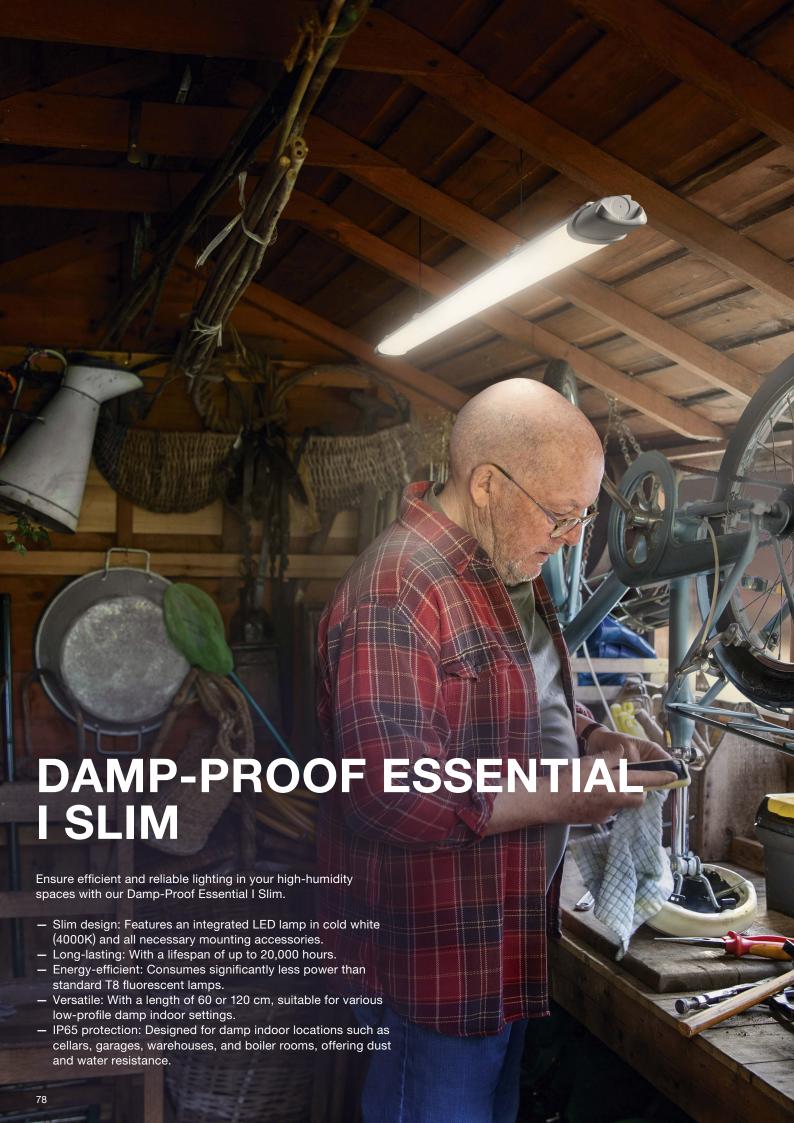














| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t _M ² | W | lm 3 | Im ught source | K | CRI | | IP |
|--|-----------------------|-----|-------|----------|------------------------------------|------|-------------|----------------|------|------|-----|------|
| Damp Proof Essential Slim 600mm 9W 4000K | 4058075 762619 | 1 | White | Plastic | 20 000 | 9.0 | 900 | 1 050 | 4000 | > 80 | 120 | IP65 |
| Damp Proof Essential Slim 1200mm 18W 4000K | 4058075 762633 | 1 | White | Plastic | 20 000 | 18.0 | 1 800 | 2100 | 4000 | > 80 | 120 | IP65 |


| Product name | | X Not. | LED MODULE NTEGRATED | CONNECTOR | ACCIS- SOME Belling | [mm] | W [mm] | ţh [mm] | Ø d [mm] | |
|--|---------|--------|----------------------------|---------------|---|-------|--------|------------|----------------|---|
| Damp Proof Essential Slim 600mm 9W 4000K | 100 000 | | Not replaceable | Cable, 3-pole | Mounting screws, Plastic dowels, Mounting equipment | 660 | 53 | 35 | | 6 |
| Damp Proof Essential Slim 1200mm 18W 4000K | 100 000 | _ | Not replaceable | Cable, 3-pole | Mounting screws, Plastic dowels, Mounting equipment | 1 260 | 53 | 35 | - | 6 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

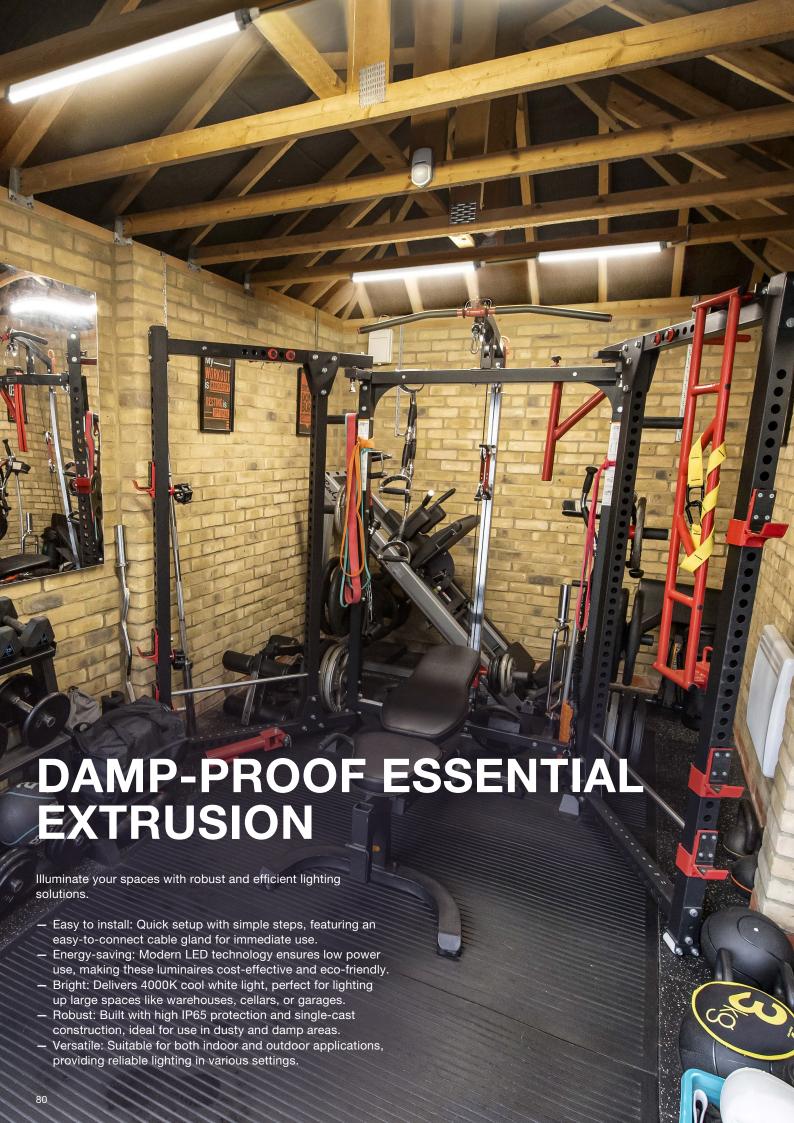



Product sizes (in mm)



1 540









| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t M ² | W | lm 3 | Im ught source | K | CRI | | P |
|---|-----------------------|-----|-------|--------------|-------------------------|------|-------------|----------------|------|------|-----|------|
| Damp proof Essential Extrusion 18W 600mm 840 | 4099854 287855 | 1 | White | Plastic (PC) | 30 000 | 18.0 | 2160 | 2250 | 4000 | > 80 | 140 | IP65 |
| Damp proof Essential Extrusion 36W 1200mm 840 | 4099854 287879 | 1 | White | Plastic (PC) | 30 000 | 36.0 | 4320 | 5 000 | 4000 | > 80 | 140 | IP65 |
| Damp proof Essential Extrusion 50W 1500mm 840 | 4099854 287893 | 1 | White | Plastic (PC) | 30 000 | 50.0 | 6 000 | 6800 | 4000 | > 80 | 140 | IP65 |

| Product name | | X NCL. | LED MODULE ATEGNATED | CONNECTOR | ACCES- SORIES ROLLINGS | [mm] | (mm) | h _[mm] | Ø d [mm] | |
|---|--------|--------|----------------------------|---------------|---|-------|------|-------------------|----------|---|
| Damp proof Essential Extrusion 18W 600mm 840 | 15 000 | _ | Not replaceable | Cable, 2-pole | Mounting screws, Plastic dowels, Mounting clips | 640 | 37 | 48 | - | 6 |
| Damp proof Essential Extrusion 36W 1200mm 840 | 15000 | - | Not replaceable | Cable, 2-pole | Mounting screws, Plastic dowels, Mounting clips | 1 240 | 37 | 48 | - | 6 |
| Damp proof Essential Extrusion 50W 1500mm 840 | 15000 | - | Not replaceable | Cable, 2-pole | Mounting screws, Plastic dowels, Mounting clips | 1 540 | 37 | 48 | - | 6 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



LED BULKHEAD

























| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t M ² | W | оптрит 3 | Im ught source | K | CRI | | IP |
|------------------------------|-----------------------|-----|-------|--------------|-------------------------|------|----------|----------------|------|-----|-----|------|
| LED Bulkhead 6W 4000K Black | 4058075 271647 | 1 | Black | Plastic (PC) | 20 000 | 6.0 | 420 | 600 | 4000 | ≥80 | 120 | IP54 |
| LED Bulkhead 6W 4000K White | 4058075 271586 | 1 | White | Plastic (PC) | 20 000 | 6.0 | 420 | 600 | 4000 | ≥80 | 120 | IP54 |
| LED Bulkhead 11W 4000K Black | 4058075 271685 | 1 | Black | Plastic (PC) | 20 000 | 11.0 | 840 | 1 200 | 4000 | ≥80 | 120 | IP54 |
| LED Bulkhead 11W 4000K White | 4058075 271661 | 1 | White | Plastic (PC) | 20 000 | 11.0 | 840 | 1 200 | 4000 | ≥80 | 120 | IP54 |

| Product name | | X PICL. | LED MODULE NITEGRATED | CONNECTOR | ACCES- SONES INCLESS | [mm] | W | h [mm] | Ø d [mm] | |
|------------------------------|--------|---------|-----------------------------|----------------|----------------------------|------|-----|-----------|----------------|---|
| LED Bulkhead 6W 4000K Black | 25 000 | _ | Not replaceable | Screw terminal | Screws, Plastic dowels | 117 | 168 | 70 | _ | 8 |
| LED Bulkhead 6W 4000K White | 25 000 | - | Not replaceable | Screw terminal | Screws, Plastic dowels | 117 | 168 | 70 | - | 8 |
| LED Bulkhead 11W 4000K Black | 25 000 | _ | Not replaceable | Screw terminal | Screws, Plastic dowels | 216 | 143 | 79 | - | 6 |
| LED Bulkhead 11W 4000K White | 25 000 | - | Not replaceable | Screw terminal | Screws, Plastic dowels | 216 | 143 | 79 | - | 6 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser












Product sizes (in mm)



230



















| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | lm 3 | Im ught source | K | CRI | | IP |
|--|-----------------------|-----|-------|----------|---------------------------|----|-------------|----------------|-------|-----|-----|------|
| Worklight Battery PB40W 865DIM Power4all | 4058075 843189 | 1 | Black | _ | 30 000 | 40 | 4500 | _ | 6 500 | _ | 100 | IP54 |


| Product name | | X NCL. | LED MODULE INTEGRATED | CONNECTOR | ACCES- SORIES INCLUEED | [mm] | W | ţh _[mm] | Ø d [mm] | |
|--|-------|--------|-----------------------------|-----------|------------------------------|------|-----|--------------------|----------------|---|
| Worklight Battery PB40W 865DIM Power4all | 7 500 | | _ | | _ | 230 | 155 | 290 | | 1 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser























| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | lm 3 | Im ught source | K | CRI | | IP |
|---|-----------------------|-----|-------|----------|---------------------------|----|-------------|----------------|------|-----|-----|----|
| Worklight Battery 15W 865 DIM Power4all | 4058075 843226 | 1 | Black | - | 30 000 | 15 | 1 300 | _ | 6500 | | 100 | |

| Product name | | X PRCL. | MODULE NTEGRATED | CONNECTOR | ACCES- SORIES INCLUDED | | W [mm] | h [mm] | Ø d [mm] | |
|---|-------|---------|---------------------|-----------|------------------------------|-----|--------|-----------|----------------|---|
| Worklight Battery 15W 865 DIM Power4all | 7 500 | _ | _ | - | - | 200 | 195 | 236 | _ | 1 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






266



Product sizes (in mm)



311




















| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | 3 оптрит | Im ught source | K | CRI | | IP |
|---|-----------------------|-----|--------|------------------|---------------------------|------|----------|----------------|------|-----|-----|------|
| LED Worklight Battery R-Stand 10W 4000K | 4058075 576476 | 1 | Orange | Aluminum/Plastic | 25 000 | 10.0 | 800 | 900 | 4000 | ≥80 | 120 | IP44 |
| LED Worklight Battery R-Stand 20W 4000K | 4058075 576490 | 1 | Orange | Aluminum/Plastic | 25 000 | 20.0 | 1 600 | 1 800 | 4000 | ≥80 | 120 | IP44 |
| LED Worklight Battery R-Stand 30W 4000K | 4058075 576513 | 1 | Orange | Aluminum/Plastic | 25 000 | 30.0 | 2400 | 3 000 | 4000 | ≥80 | 120 | IP44 |

| Product name | | NCL. | LED MODULE NTEGRATED | CONNECTOR | ACCES- SORIES INCLUDED | [mm] | (mm) | h [mm] | Ø d [mm] | a |
|---|--------|------|----------------------------|-----------|------------------------------|------|------|-----------|----------|----------|
| LED Worklight Battery R-Stand 10W 4000K | 15 000 | - | Not replaceable | _ | EU Plug | 200 | 206 | 276 | - | 4 |
| LED Worklight Battery R-Stand 20W 4000K | 15 000 | - | Not replaceable | - | EU Plug | 266 | 200 | 276 | _ | 4 |
| LED Worklight Battery R-Stand 30W 4000K | 15 000 | - | Not replaceable | _ | EU Plug | 311 | 200 | 316 | - | 4 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser












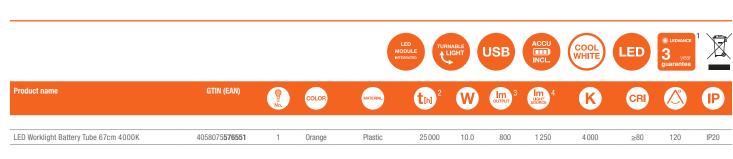


| Product name | | X (P) | LED MODULE INTEGRATED | CONNECTOR | ACCES- SOFIED INCLUSED | [mm] | W [mm] | in [mm] | Ø d [mm] | |
|---------------------------------------|--------|-------|-----------------------------|-----------|------------------------------|------|--------|---------|----------|---|
| LED Worklight Battery Tube 67cm 4000K | 15 000 | | Not replaceable | | EU Plug | 666 | 70 | 46 | | |
| LED WORKIIGHT BALLETY TUDE 67CH 4000K | 13000 | | NULTEPIACEADIE | | EU Flug | 000 | 12 | 46 | | 4 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser












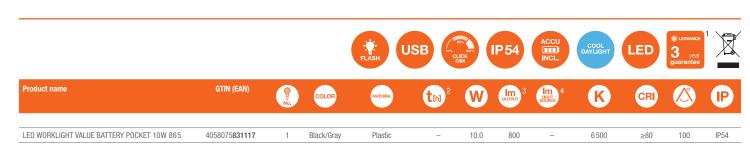

| Product name | | X PICL. | LED MODULE INTEGRATED | CONNECTOR | ACCES- SORES NOTICES | (mmj | (mm) | h [mm] | Ø d [mm] | |
|--|-------|---------|-----------------------------|-----------|----------------------------|------|------|-----------|----------------|---|
| LED WORKLIGHT VALUE BATTERY POCKET 10W 865 | 7 500 | | Not replaceable | USB | USB-C cable | 100 | 45 | 100 | _ | 8 |


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






Product colors



























| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t h 2 | W | lm 3 | Im UGHT SOURCE | K | CRI | | P |
|---|-----------------------|-----|------------|----------|--------------|------|-------------|----------------|-------|-----|-----|------|
| | | | | | | | | | | | | |
| LED WORKLIGHT VALUE BATTERY R-STAND 20W 865 | 4058075 831131 | 1 | Black/Gray | Aluminum | 15 000 | 20.0 | 2000 | - | 6 500 | ≥80 | 115 | IP54 |
| LED WORKLIGHT VALUE BATTERY R-STAND 30W 865 | 4058075 831155 | 1 | Black/Gray | Aluminum | 15 000 | 30.0 | 3 000 | - | 6 500 | ≥80 | 115 | IP54 |

| Product name | | X NCL. | LED MODULE ATEGRATED | CONNECTOR TYPE | ACCES- SORES NOCUEO | [mm] | W | h [mm] | Ø d [mm] | |
|---|-------|--------|----------------------------|----------------|---------------------------|------|-----|-----------|----------------|---|
| | | | | | | | | | | |
| LED WORKLIGHT VALUE BATTERY R-STAND 20W 865 | 7 500 | - | Not replaceable | USB | USB-C cable, Batteries | 266 | 220 | 276 | - | 6 |
| LED WORKLIGHT VALUE BATTERY R-STAND 30W 865 | 7 500 | _ | Not replaceable | USB | USB-C cable, Batteries | 292 | 219 | 276 | - | 4 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

WORKLIGHT VALUE BATTERY FLEX


Easily improve the safety of your working space with our Value Battery Flex luminaire that provides rotatable light directions.

- Efficient light: Battery-powered worklight with cold white light (6500K).
- Varied: rotatable heads for customizable light direction and USB charging function thanks to integrated power bank.
- Versatile: Ideal for crafts, construction, automotive repairs, and outdoor activities.
- Easy portability: Compact and lightweight design ensures convenient portability.
- IP20 protection: Providing essential protection against accidental contact with live components.





Product sizes (in mm)



Product name

LED WORKLIGHT VALUE BATTERY FLEX 7W 865

4058075**834026**





14.0

1 400

6500

≥80

110

IP20

| Product name | | X O | LED MODULE INTEGRATED | CONNECTOR TYPE | ACCES- SORIES HOLLING | [mm] | W [mm] | h [mm] | Ø d [mm] | |
|---|-------|-----|-----------------------------|-------------------|-----------------------------|------|-----------|-----------|----------------|---|
| LED WORKLIGHT VALUE BATTERY FLEX 7W 865 | 7 500 | _ | Not replaceable | USB | USB-C cable | 200 | 59 | 141 | _ | 8 |

Plastic


Black/Gray

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

























| Product name | GTIN (EAN) | O E No. | COLOR | MATERIAL | t M ² | W | lm 3 | Im ught source | K | CRI | | IP |
|---|-----------------------|---------|------------|----------|-------------------------|------|-------------|----------------|-------|-----|-----|------|
| | | | | | | | | | | | | |
| LED WORKLIGHT VALUE BATTERY PANEL 26W 865 | 4058075 831179 | 1 | Black/Gray | Plastic | 15 000 | 26.0 | 3 000 | - | 6 500 | ≥80 | 108 | IP54 |


| Product name | | X P | LED MODULE INTEGRATED | CONNECTOR | ACCES- SORIES NOLUMO | [mm] | W [mm] | h [mm] | Ø d [mm] | |
|---|------|-----|-----------------------------|------------------|----------------------------|------|-----------|-----------|----------------|---|
| | | | | | | | | | | |
| LED WORKLIGHT VALUE BATTERY PANEL 26W 865 | 7500 | - | Not replaceable | Plug type C (EU) | Batteries | 385 | 70 | 315 | - | 5 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













| Product name | | X PICL. | LED MODULE STEGRATED | CONNECTOR | ACCES- SORIES INCLUDED | [mm] | W [mm] | h [mm] | Ø d [mm] | |
|-------------------------------|--------|---------|----------------------------|------------------------------|------------------------------|------|-----------|-----------|----------------|---|
| LED Worklight Panel 50W 4000K | 15 000 | _ | Not replaceable | Protective contact Plug type | - | 50 | 201 | 141 | _ | 4 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





































| IP. | |
|-----|--|

| Product name | GIIN (EAN) | No. | COLOR | MATERIAL | t _[h] ² | W | в в притод | ught source | K | CRI | | IP |
|--|-----------------------|-----|-----------|----------------|-------------------------------|------|------------|----------------|------|-----|-----|------|
| LED Worklight R-Stand Socket 20 W 4000 K | 4058075 321304 | 1 | Dark gray | Aluminum/Steel | 25 000 | 20.0 | 1 700 | _ | 4000 | ≥80 | 120 | IP44 |
| LED Worklight R-Stand Socket 30 W 4000 K | 4058075 321328 | 1 | Dark gray | Aluminum/Steel | 25 000 | 30.0 | 2700 | - | 4000 | ≥80 | 120 | IP44 |
| LED Worklight R-Stand Socket 50 W 4000 K | 4058075 321342 | 1 | Dark gray | Aluminum/Steel | 25 000 | 50.0 | 4500 | - | 4000 | ≥80 | 120 | IP44 |

| Product name | | X PROL. | LED MODULE NITEGRATED | CONNECTION | ACCES- SORIES NCLUDED | [mm] | (mm) | h [mm] | Ø d [mm] | |
|--|--------|---------|-----------------------------|------------------------------|-----------------------------|------|------|-----------|----------------|---|
| LED Worklight R-Stand Socket 20 W 4000 K | 15 000 | _ | Not replaceable | Protective contact Plug type | | 227 | 224 | 278 | _ | 4 |
| LED Worklight R-Stand Socket 30 W 4000 K | 15000 | - | Not replaceable | Protective contact Plug type | _ | 232 | 224 | 307 | - | 4 |
| LED Worklight R-Stand Socket 50 W 4000 K | 15 000 | - | Not replaceable | Protective contact Plug type | - | 270 | 278 | 375 | - | 2 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




































| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t[h] ² | W | 3 очтрит | Im 4 | K | CRI | | IP |
|-----------------------------------|-----------------------|-----|-----------|----------------|-------------------|------|----------|------|------|-----|-----|------|
| LED Worklight S-Stand 20 W 4000 K | 4058075 213838 | 1 | Dark gray | Aluminum/Steel | 25 000 | 20.0 | 1700 | _ | 4000 | ≥80 | 120 | IP65 |
| LED Worklight S-Stand 30 W 4000 K | 4058075 213852 | 1 | Dark gray | Aluminum/Steel | 25 000 | 30.0 | 2700 | - | 4000 | ≥80 | 120 | IP65 |
| LED Worklight S-Stand 50 W 4000 K | 4058075 213876 | 1 | Dark gray | Aluminum/Steel | 25 000 | 50.0 | 4500 | _ | 4000 | ≥80 | 120 | IP65 |

| Product name | | X P | LED MODULE NTEGRATED | CONNECTION | ACCES- SORIES NOLLINES | [mm] | (mm) | h [mm] | Ø d [mm] | |
|-----------------------------------|--------|-----|----------------------------|------------------------------|------------------------------|------|------|-----------|----------|----|
| LED Worklight S-Stand 20 W 4000 K | 15 000 | - | Not replaceable | Protective contact Plug type | Screws, Allen wrench, Holder | 180 | 160 | 280 | - | 10 |
| LED Worklight S-Stand 30 W 4000 K | 15 000 | - | Not replaceable | Protective contact Plug type | Screws, Allen wrench, Holder | 220 | 210 | 325 | - | 10 |
| LED Worklight S-Stand 50 W 4000 K | 15 000 | - | Not replaceable | Protective contact Plug type | Screws, Allen wrench, Holder | 264 | 267 | 395 | - | 10 |


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors























| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | 3 оптрит | Im ught source | K | CRI | | IP |
|-------------------------------------|-----------------------|-----|------------|----------|---------------------------|------|----------|----------------|-------|-----|-----|------|
| LED WORKLIGHT VALUE R-STAND 10W 865 | 4058075 831193 | 1 | Black/Gray | Aluminum | 30 000 | 10.0 | 1 000 | 1 200 | 6 500 | ≥80 | 110 | IP65 |
| LED WORKLIGHT VALUE R-STAND 20W 865 | 4058075 831230 | 1 | Black/Gray | Aluminum | 30 000 | 20.0 | 2000 | 2500 | 6 500 | ≥80 | 115 | IP54 |
| LED WORKLIGHT VALUE R-STAND 30W 865 | 4058075 831254 | 1 | Black/Gray | Aluminum | 30 000 | 30.0 | 3 000 | 3 500 | 6 500 | ≥80 | 115 | IP54 |
| LED WORKLIGHT VALUE R-STAND 50W 865 | 4058075 831278 | 1 | Black/Gray | Aluminum | 30 000 | 50.0 | 5 400 | 6 000 | 6 500 | ≥80 | 110 | IP65 |

| Product name | | X NCL. | LED MODULE MI EGNATED | CONNECTOR | ACCES- SORIES MCLUSED | [mm] | W [mm] | h | Ø d [mm] | |
|-------------------------------------|--------|--------|-----------------------------|-------------|-----------------------------|------|-----------|-----|----------|---|
| LED WORKLIGHT VALUE R-STAND 10W 865 | 15000 | _ | Not replaceable | Plug type F | - | 180 | 139 | 194 | - | 8 |
| LED WORKLIGHT VALUE R-STAND 20W 865 | 15 000 | - | Not replaceable | Plug type F | - | 238 | 149 | 254 | - | 8 |
| LED WORKLIGHT VALUE R-STAND 30W 865 | 15 000 | _ | Not replaceable | Plug type F | - | 288 | 169 | 277 | - | 6 |
| LED WORKLIGHT VALUE R-STAND 50W 865 | 15 000 | _ | Not replaceable | Plug type F | - | 291 | 174 | 280 | - | 6 |

^{* 4058075831193; 4058075831278 | ** 4058075831230; 4058075831254}


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors









| Product name | | X Not. | LED MODULE INTEGRATED | CONNECTOR | ACCES- SORIES INCLUSED | (mm) | W | th [mm] | Ø d [mm] | |
|--|-------|--------|-----------------------------|-------------|------------------------------|------|-----|------------|----------------|---|
| | | | | | | | | | | |
| LED WORKLIGHT VALUE 360° WITH SOCKET 30W 865 | 15000 | | Not replaceable | Plug type F | - | 222 | 227 | 220 | - | 4 |


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

WORKLIGHT VALUE **FLEX** Working smart with the two individually adjustable heads of the VALUE FLEX, providing customized lighting for any situation. Efficient light: LED worklight with cold white light color (6500K), powered by a cable with an EU plug. - Varied: LED worklight with 270° vertically and 180° horizontally rotatable heads. The two heads can be switched independently of each other and offer individually adjustable light. Versatile: Robust LED worklight with multiple areas of application such as crafts, construction, industry, car repairs, garages, basements and outdoors. - Easy portability: Handy and versatile worklight which can be easily transported through its compact lightweight design. IP65 protection: Designed for damp indoor locations such as cellars, garages, warehouses, and boiler rooms, offering dust and water resistance. 112




Product colors







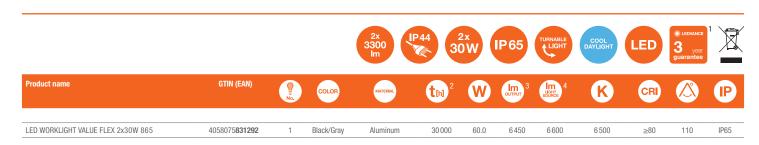

| Product name | | X O | LED MODULE INTEGRATED | CONNECTOR | ACCES- SORIES NOLLOGO | [mm] | W [mm] | h [mm] | Ø d [mm] | |
|------------------------------------|--------|-----|-----------------------------|-------------|-----------------------------|------|-----------|-----------|----------------|---|
| LED WORKLIGHT VALUE FLEX 2x30W 865 | 15 000 | _ | Not replaceable | Plug type F | - | 427 | 194 | 304 | _ | 4 |

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser









Product colors





Product sizes (in mm)
























| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t M ² | W | lm 3 | Im ught source | K | CRI | | IP |
|---|-----------------------|-----|-------|----------|-------------------------|-------|-------------|----------------|-------|-----|-----|------|
| LED Worklight Value High Power 60W 865 2x Socket | 4099854 282881 | 1 | Black | Aluminum | 30 000 | 60.0 | 7200 | 8 2 0 0 | 6 500 | ≥80 | 100 | IP54 |
| LED Worklight Value High Power 100W 865 2x Socket | 4099854 282904 | 2 | Black | Aluminum | 30 000 | 100.0 | 12000 | 14000 | 6 500 | ≥80 | 100 | IP54 |

| Product name | | X P | LED MODULE attorated | COMNECTOR | ACCIS- SONIES NECURED | [mm] | (mm) | h _[mm] | Ø d [mm] | |
|---|--------|-----|----------------------------------|----------------------------|-----------------------------|------|------|-------------------|----------------|---|
| LED Worklight Value High Dower COM 965 2v Cooket | 15 000 | | Not replaceable | Dlug type E | | 200 | 82 | 311 | | |
| LED Worklight Value High Power 60W 865 2x Socket LED Worklight Value High Power 100W 865 2x Socket | 15000 | _ | Not replaceable Not replaceable | Plug type F Plug type F | | 300 | 92 | 368 | | 2 |


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors

















| ı | / |
|---|---|
| • | |
| | |
| | |

| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t M ² | W | Іт 3 | Im ught source | K | CRI | | IP |
|---------------------------------------|-----------------------|-----|--------|------------------|-------------------------|------|-------------|----------------|------|-----|-----|------|
| LED Worklight Charge Mobile 40W 4000K | 4058075 576575 | 1 | Orange | Aluminum/Plastic | 25 000 | 40.0 | 3600 | | 4000 | ≥80 | 110 | IP54 |

| Product name | | X PROL. | LED MODULE NTEGRATIO | CONNECTOR | ACCES- SORIES OCCURRO | (mm) | W [mm] | h [mm] | Ø d [mm] | |
|---------------------------------------|--------|---------|----------------------------|-----------|-----------------------------|-------|-----------|-----------|----------------|---|
| LED Worklight Charge Mobile 40W 4000K | 15 000 | _ | Not replaceable | - | Screws, Allen wrench, Stand | 1 694 | 755 | 658 | _ | 2 |


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors
























| Product name | GTIN (EAN) | No. | COLOR | MATERIAL | t [h] ² | W | оптрит 3 | Im ught source | K | CRI | | IP |
|--|-----------------------|-----|-------|----------|---------------------------|------|----------|----------------|-------|-----|-----|------|
| LED Worklight Value Tripod Battery 1x20W 865 | 4099854 282775 | 1 | Black | Aluminum | 15 000 | 20.0 | 2000 | | 6 500 | ≥80 | 115 | IP54 |

| Product name | | X PICL. | LED MODULE INTEGRATED | CONNECTOR | ACCES- SORIES INCLESS | [mm] | W [mm] | h [mm] | Ø d [mm] | |
|--|-------|---------|-----------------------------|-----------|---------------------------------|-------|--------|-----------|----------|---|
| LED Worklight Value Tripod Battery 1x20W 865 | 7 500 | _ | Not replaceable | USB | USB-C cable, Mounting equipment | 1 070 | 920 | 1 550 | - | 2 |


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




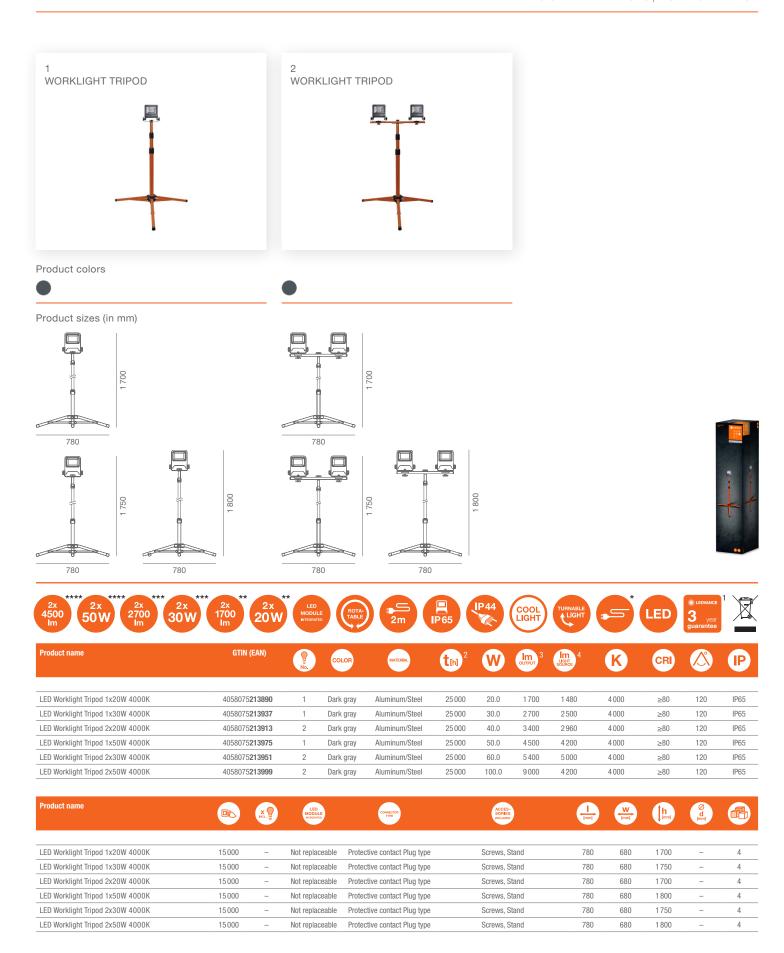

^{* 4058075213890; 4058075213937; 4058075213975 | ** 4058075213913 | *** 4058075213951 | *** 4058075213999}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

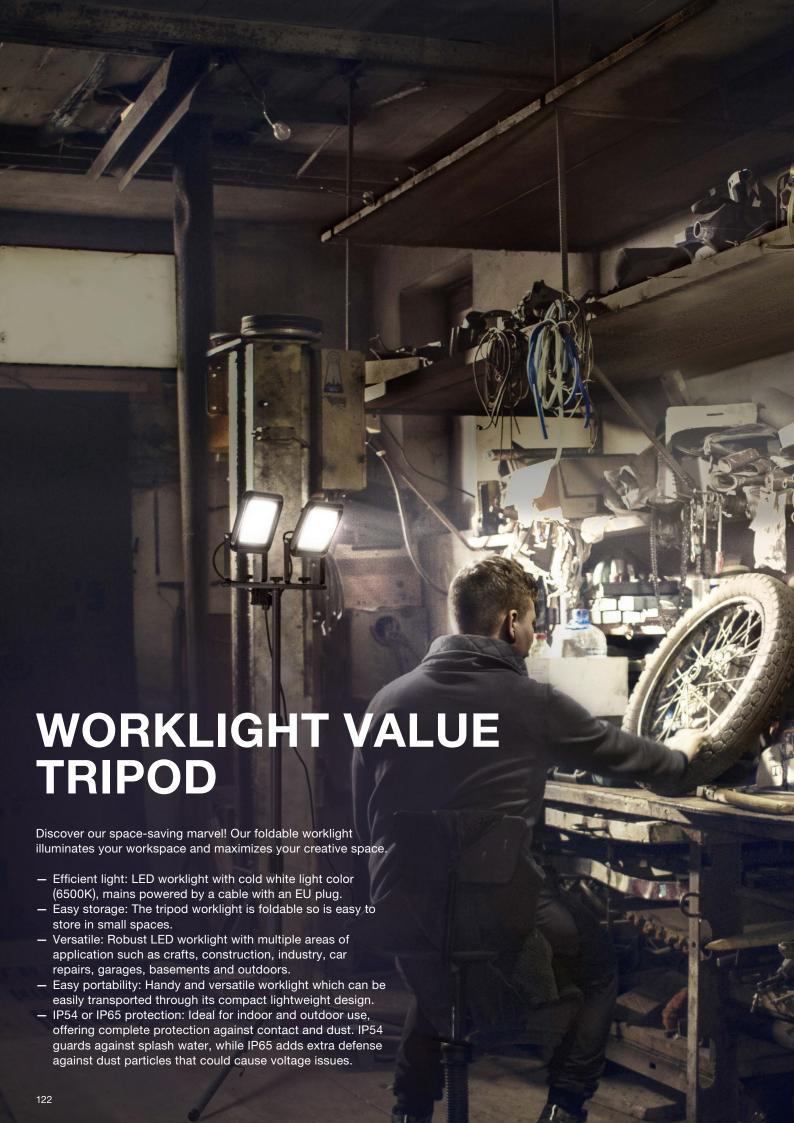


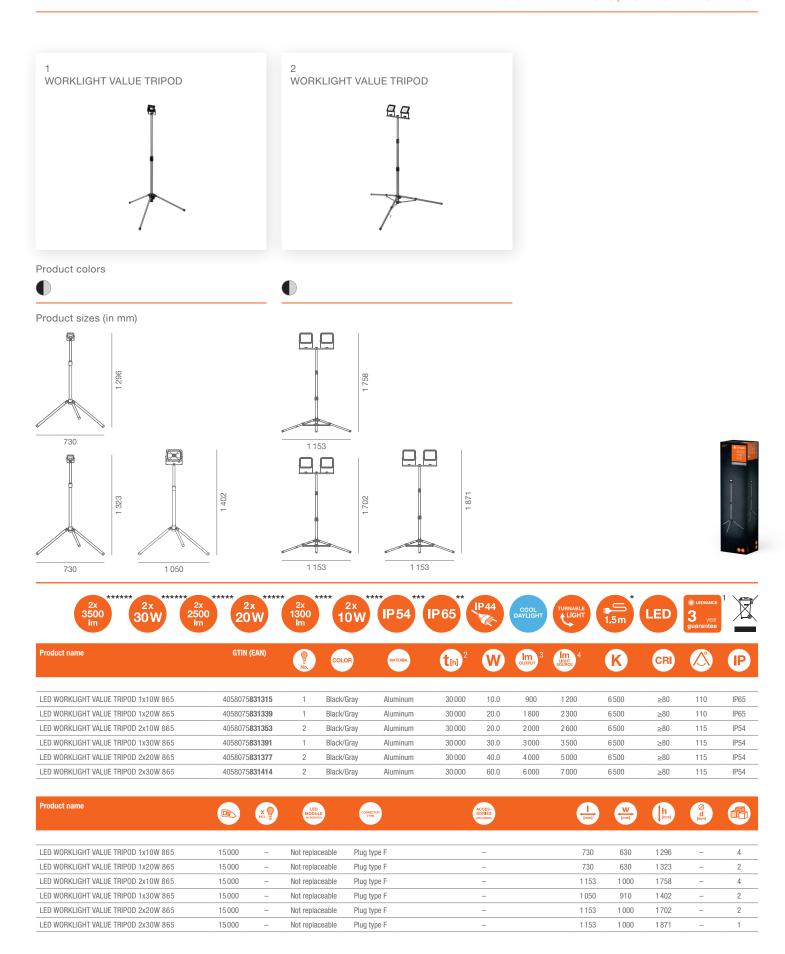

^{* 4058075831315; 4058075831339; 4058075831391 | *** 4058075831391 | *** 4058075831393; 4058075831353; 4058075831377; 4058075831391; 4058075831414 | ***** 4058075831353 | ***** 4058075831353 | ***** 4058075831377 | ****** 4058075831414}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



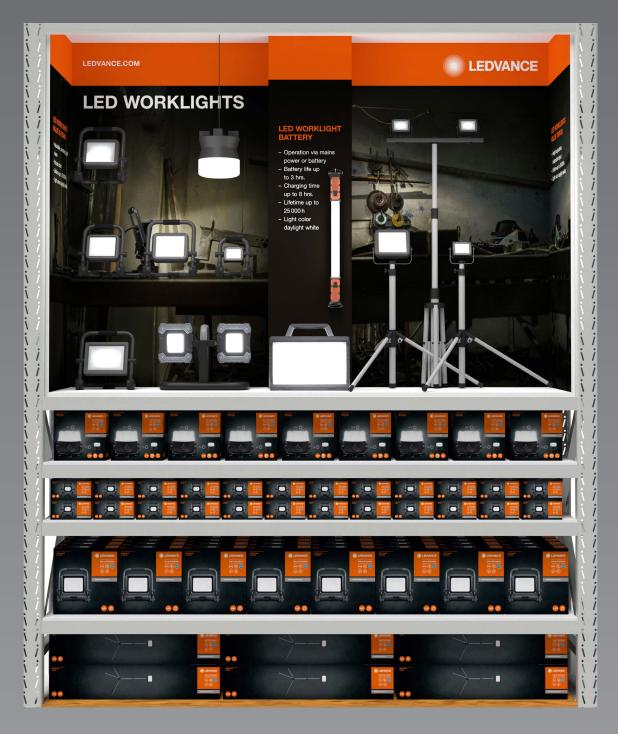

ATTRACTIVE SHELF DESIGN

A shelf full of ready-made incentives. See a variety of well-engineered and customized functional lighting packages.

Our shelves are eye-catching and perfectly designed to meet the needs of target audiences. Product-specific benefits and features are explained and functional product samples are displayed to make the products intuitively understandable for your customers.

SYMBOLS IN THE TABLES



Type of connection

Beam angle in degrees °

Ambient temperature range in degrees Celsius

PRODUCT-SPECIFIC SYMBOLS



PRODUCT-SPECIFIC SYMBOLS

SMART⁺ App

Adjustable light temperature



Open cable, 1 m in length

Magnetic mounting

127

Turnable light

household waste

Do not throw away with

PRODUCT-SPECIFIC SYMBOLS



| NOTES |
|-------|
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |



ABOUT LEDVANCE

With offices in more than 50 countries and business activities in more than 140 countries, LEDVANCE is one of the world's leading general lighting providers for professional users and end consumers. Having emerged from the general lighting business of OSRAM GmbH, LEDVANCE offers a wide-ranging assortment of LED luminaires for a broad spectrum of application areas, intelligent lighting products for Smart Homes and Buildings, one of the largest LED lamps portfolios in the industry as well as traditional light sources.

LEDVANCE GmbH Parkring 1-5 85748 Garching Germany

Customer Service Centre:

Germany: Phone: +49 89 780673-670