




## Spectrum Test Report

Sample : Date : 2024-10-23 15:11:18  
Specification : CYLINDPS010UNHD8SC2R3BZP Max 300Sam. Statusn + u:  
Sample No. : Standard : LM-79-19  
Manufacturer : LEDVANCE LLC Instrument : HaasSuite(EVERFINE)  
Remark : Test by : Alan Wang

### Test Condition

Temperature : 25.3Deg RH : 65.0%  
WL Range : 380nm-780nm IP : 55667 (85%)  
Test Mode : Accuracy Test T : 1952 ms

**Spectrum** : Low

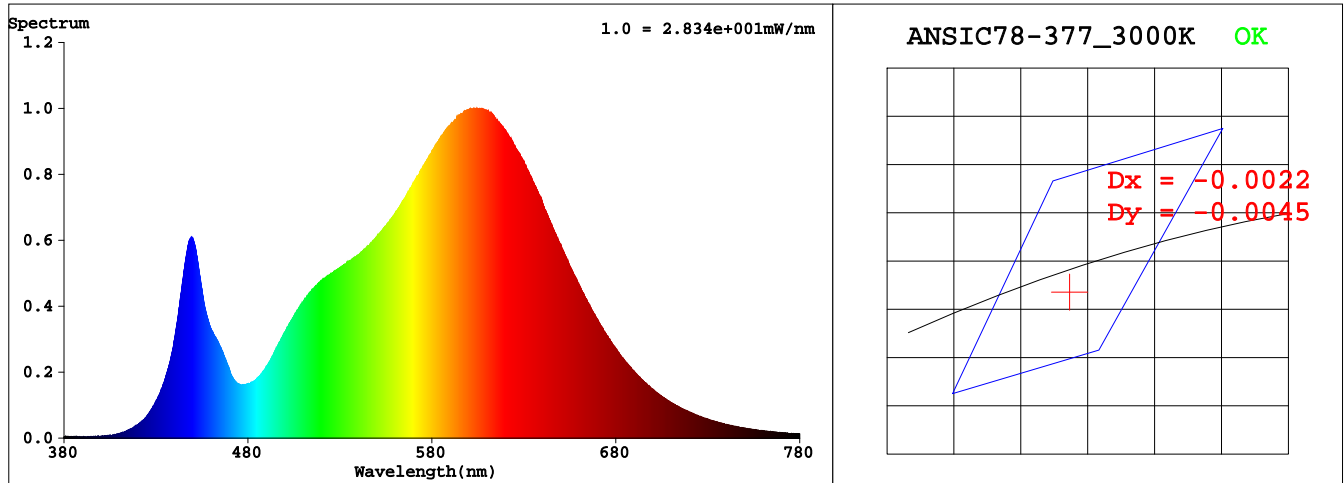

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4328$   $y = 0.3989$  /  $u' = 0.2502$   $v' = 0.5187$  ( $duv = -1.51e-03$ )

CCT= 3028K Prcp WL:  $L_d = 583.3nm$  Purity=49.6%

Peak WL:  $L_p = 603nm$  FWHM:  $=131.1nm$  Ratio: R=22.9% G=74.7% B=2.5%

Render Index:  $R_a = 83.0$  AvgR = 77.5 TM30:  $R_f = 83$   $R_g = 97$

EEL: 0.09813 A++ Highest

R1 =82 R2 =91 R3 =97 R4 =82 R5 =82 R6 =89 R7 =83

R8 =60 R9 =9 R10=79 R11=82 R12=72 R13=84 R14=99 R15=74

### Photometric & Radiometric Parameters

Flux = 1322.2 lm Eff. : 131.82 lm/W  $F_e = 4.2484 W$

### Electrical parameters

V = 120.00 V I = 0.08400 A P = 10.03 W PF = 0.9950 F=60.00 Hz

### Dongguan New Testing Centre Co., Ltd

3F, No. 1 the 1st North Industry Road, Songshan Lake Science & Technology Park, Dongguan, Guangdong, China