




## Spectrum Test Report

Sample : Date : 2024-10-23 18:54:09  
Specification : CYLINDPS010UNHD8SC2R3BZP Min 300(Sam. Status) + up:  
Sample No. : Standard : LM-79-19  
Manufacturer : LEDVANCE LLC Instrument : HaasSuite(EVERFINE)  
Remark : Test by : Alan Wang

### Test Condition

Temperature : 25.3Deg RH : 65.0%  
WL Range : 380nm-780nm IP : 50601 (77%)  
Test Mode : Accuracy Test T : 3345 ms

**Spectrum** : Low

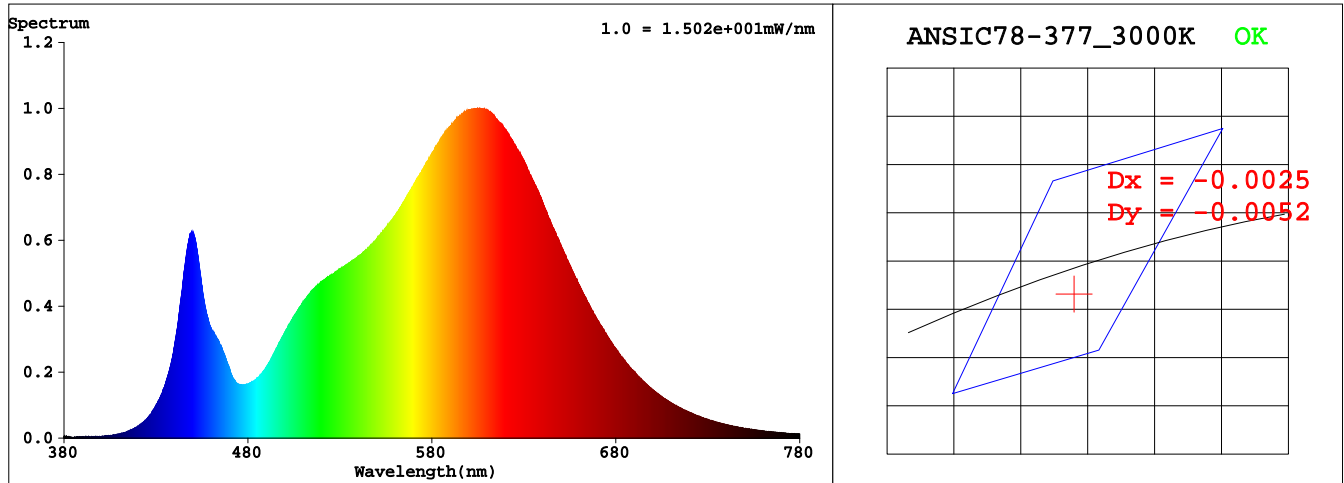

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4335$   $y = 0.3986$  /  $u' = 0.2507$   $v' = 0.5187$  ( $duv = -1.74e-03$ )

CCT= 3013K Prcp WL:  $L_d = 583.4nm$  Purity=49.7%

Peak WL:  $L_p = 606nm$  FWHM:  $=130.0nm$  Ratio:  $R=23.0\%$   $G=74.5\%$   $B=2.5\%$

Render Index:  $R_a = 83.3$  AvgR = 77.9 TM30:  $R_f = 84$   $R_g = 98$

EEL: 0.08558 A++ Highest

$R_1 = 82$   $R_2 = 91$   $R_3 = 97$   $R_4 = 82$   $R_5 = 82$   $R_6 = 89$   $R_7 = 83$

$R_8 = 60$   $R_9 = 10$   $R_{10} = 79$   $R_{11} = 82$   $R_{12} = 73$   $R_{13} = 84$   $R_{14} = 99$   $R_{15} = 75$

### Photometric & Radiometric Parameters

Flux = 698.5 lm Eff. : 136.42 lm/W  $F_e = 2.2431 W$

### Electrical parameters

$V = 120.00 V$   $I = 0.04290 A$   $P = 5.120 W$  PF = 0.9946 F=60.00 Hz

### Dongguan New Testing Centre Co., Ltd

3F, No. 1 the 1st North Industry Road, Songshan Lake Science & Technology Park, Dongguan, Guangdong, China