



Spectrum Test Report

Sample :
Specification : CYLINDPS020UNHD8SC2R4BZP Middle 3000K 6000K
Sample No. :
Manufacturer : LEDVANCE LLC
Remark :


Date : 2024-10-18 11:01:58
3000K 6000K
Standard : LM-79-19
Instrument : HaasSuite(EVERFINE)
Test by : Alan Wang

Test Condition

Temperature : 25.3Deg
WL Range : 380nm-780nm
Test Mode : Accuracy Test

RH : 65.0%
IP : 50640 (77%)
T : 107 ms

Spectrum : High

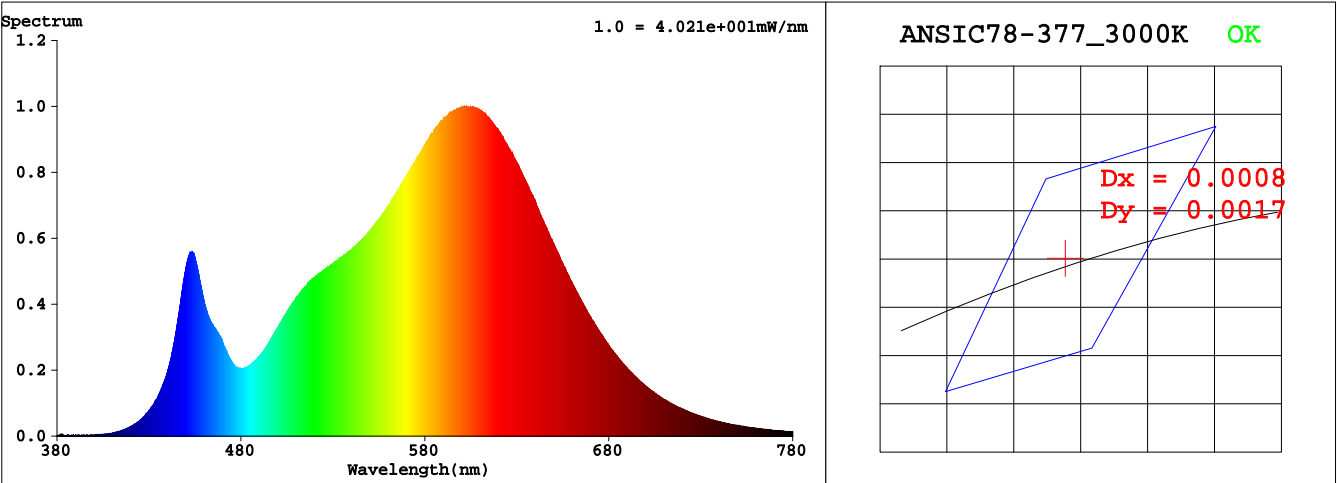

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4332$ $y = 0.4042$ / $u' = 0.2481$ $v' = 0.5209$ ($duv=5.63e-04$)
CCT= 3064K Prcp WL: Ld=582.3nm Purity=51.4%
Peak WL: Lp=602nm FWHM: =132.4nm Ratio:R=22.5% G=74.8% B=2.7%
Render Index: Ra = 82.8 AvgR = 77.1 TM30:Rf=84 Rg=95
EEI: 0.11132 A+
R1 =81 R2 =91 R3 =96 R4 =81 R5 =81 R6 =89 R7 =83
R8 =60 R9 =8 R10=80 R11=80 R12=70 R13=84 R14=99 R15=74

Photometric & Radiometric Parameters

Flux = 1886.3 lm Eff. : 115.37 lm/W Fe = 6.0603 W

Electrical parameters

V = 120.00 V I = 0.1385 A P = 16.35 W PF = 0.9838 F=60.00 Hz

Dongguan New Testing Centre Co., Ltd

3F, No. 1 the 1st North Industry Road, Songshan Lake Science & Technology Park, Dongguan, Guangdong, China