

LEDVANCE EMERGENCY LIGHT

Installation Instructions

WET LOCATION EMERGENCY LIGHT

This wet location-rated LED emergency light delivers reliable illumination in demanding indoor or outdoor environments. A sealed, durable housing and adjustable lamp heads ensure dependable path-of-egress lighting during power outages with long-lasting, low-maintenance performance.



For warranty coverage, please register at www.ledvance.com/en-us/warranty

⚠ WARNING

Please Read All Instructions Before Attempting Installation

- FAILURE TO FOLLOW THESE INSTRUCTIONS AND WARNINGS MAY RESULT IN DEATH, SERIOUS INJURY OR SIGNIFICANT PROPERTY DAMAGE. For your protection, read and follow these warnings and instructions carefully before installing or maintaining this equipment. These instructions do not attempt to cover all installation and maintenance situations.
- RISK OF FIRE. Lamps are hot. Keep combustible material away from hot parts. Observe lamp manufacture' s warnings, recommendations and restrictions on lamp operation and maintenance. Make sure lamps are correctly installed
- RISK OF ELECTRIC SHOCK- NEVER CONNECT TO DISCONNECT FROM OR SERVICE WHILE EQUIPMENT IS ENERGIZED.
- Can be used outdoors. Suitable for use in -4°F to 104°F (-20°C to 40°C) WET locations.
- Consult local building code for approved wiring and installation.
- Disconnect AC power before servicing and installation.
- Do not mount near gas or electric heaters.
- Do not use this equipment for anything other than its intended use.
- The use of accessory equipment not recommended by the manufacturer will void product listing and warranty and may cause an unsafe condition.
- Any service on this equipment should be performed by qualified personnel only.
- Equipment should be mounted in locations and at heights where it will not be subject to tampering by unauthorized personnel.
- Use caution when servicing batteries.
- Cap unused wires with enclosed wire nuts or other approved method.
- Make sure wire terminations are secure, and leads are properly tucked in appropriate wire channels.
- Initially, battery in this unit may not be fully charged. After electricity is connected, allow for a minimum of 24 hours for battery to recharge fully.

Safety Precautions:

IMPORTANT:

READ CAREFULLY BEFORE INSTALLING THE FIXTURE. RETAIN FOR FUTURE REFERENCE.

GENERAL:

Upon receipt of the fixture, thoroughly inspect for any freight damage which should be brought to the attention of the delivery carrier.

List of Parts Included

- 1x Luminaire
- 1x mounting accessory kit

Mounting Height

Max mounting height is 7-9 feet to achieve at least 1 footcandle of illuminance in emergency mode.


Trouble Shooting Checklist

- Check your power source.
- Check electrical connections.
- The battery may not be fully charged. After electricity is connected to the unit, let it charge for at least 24 hours, then normal operation should take effect. To check, press TEST button. The unit should turn on.


Maintenance

Caution: Always turn off AC power to equipment before servicing. Servicing should only be performed by a qualified Electrician, Use only Manufacturer supplied replacement parts.


Battery Supplied requires no maintenance.

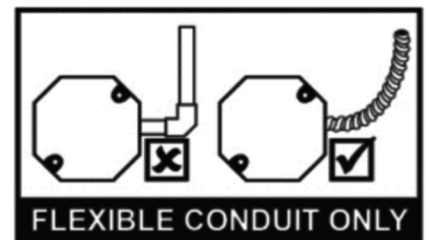


Installation- Surface Mount

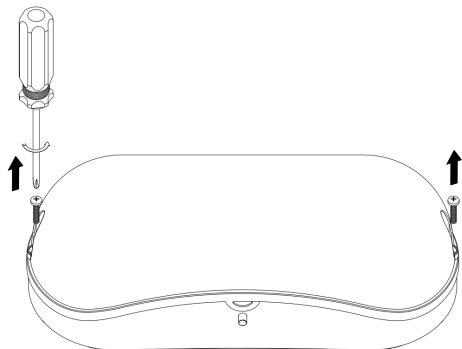


1. Unscrew the screws that fix the outer lamp cover.

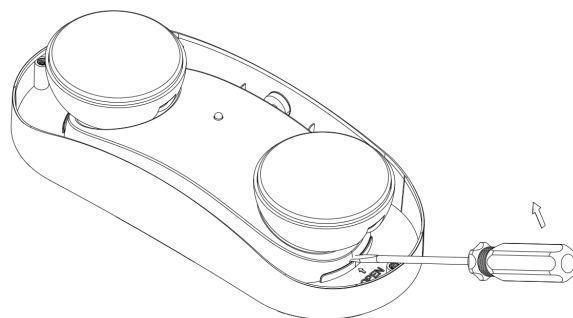



2. Use a screwdriver to remove the internal lamp body component.

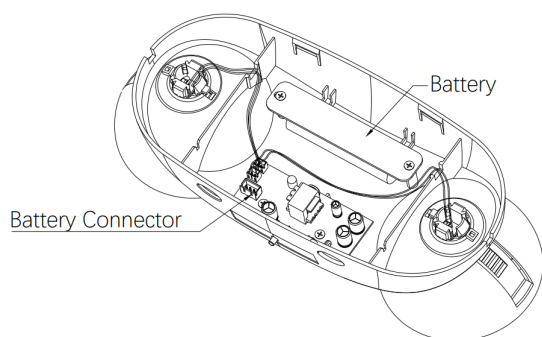

3. Connect the battery.

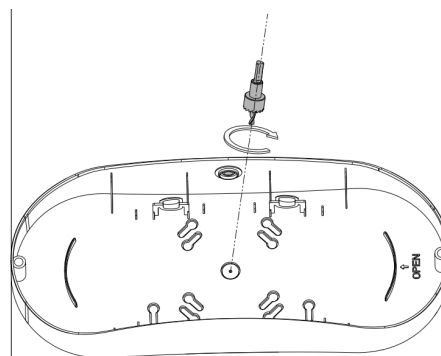


4 Drill holes at the back of the housing.

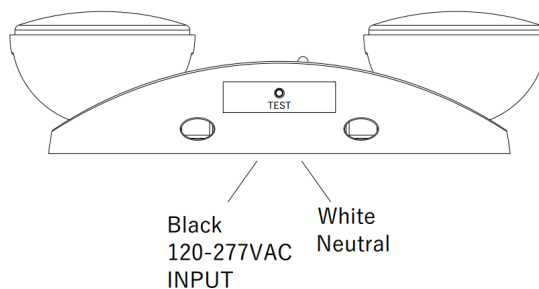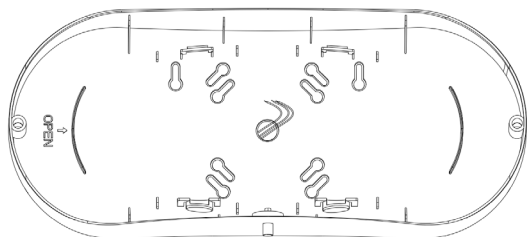


5. Pass the power cord through the casing.


Installation- Surface Mount Cont.

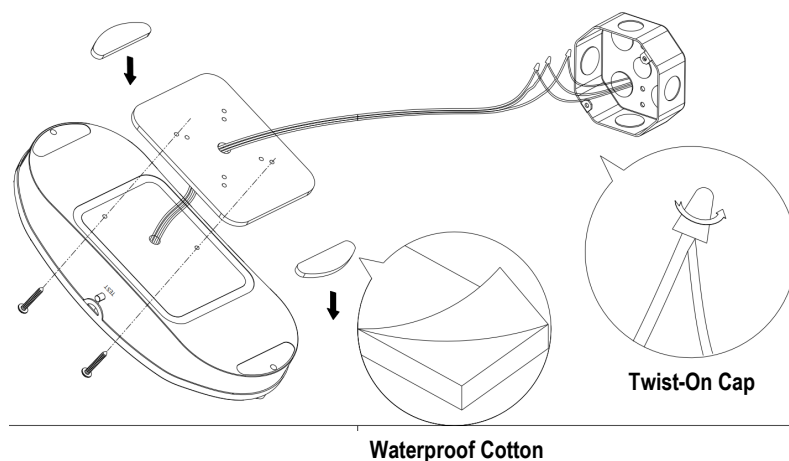

6. Connect the wire to the external power line within the octagonal box and install the waterproof foam on the back housing.

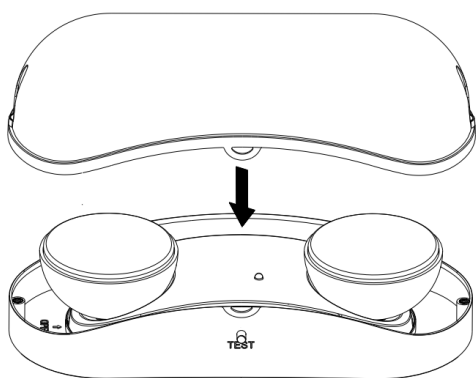

7. Install the internal lighting components and secure the outer lamp cover.

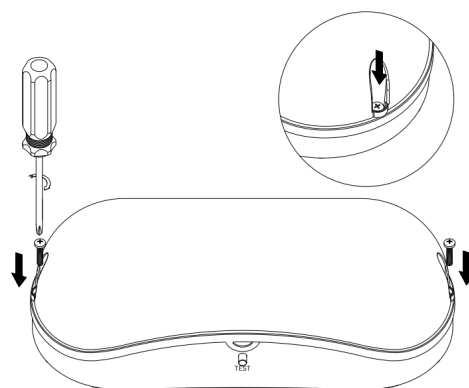

8. Use a screwdriver to secure the screws of the outer lamp cover.