



LEDVANCE LUMINAIRES

EXIT & EMERGENCY EDGE LIT

LEDVANCE LUMINAIRE SPECIFICATION DATA

Catalog #	Comments
Project	
Type	
Prepared by	

VALUE CLASS™



DESCRIPTION

The EDGE-LIT LED EXIT SIGN delivers a sleek, modern aesthetic with a slim aluminum design that enhances any architectural space. Featuring energy-efficient LED technology, it provides bright, uniform illumination for reliable egress visibility while minimizing power consumption. Selectable red or green lettering offers flexibility for a wide range of commercial applications.

APPLICATIONS

- General lighting
- Grocery and Retail
- Healthcare
- Industrial areas
- Loading docks and Warehouses
- Manufacturing facilities
- Multi-family residential
- Retail spaces
- Storage areas

ALUMINUM HOUSING

Corrosion-resistant highly durable and low-maintenance

INPUT VOLTAGE

Available in 120-277V

BUILT-IN LITHIUM BATTERY

Provides up to 90 min battery run time: Provides emergency illumination during outages to support safety, security, and code-related needs

PMMA LENS

Acrylic lens for clarity and comfortable light

VERSATILE MOUNTING

Ceiling or wall mount

COLOR SELECTABLE

Red and green selector switch

CERTIFICATIONS & LISTINGS

- FCC Compliant
- cULus listed to UL1598 and CSA C22.2 No. 250.0 Standards
- UL924
- RoHS Compliant
- Title 20
- Suitable for Damp Locations

AMBIENT OPERATING TEMPERATURE

- 14 °F to 140 °F (-10 °C to 60 °C)

ELECTRICAL

- Input Voltage: 120-277V
- Power Factor: ≥0.90
- THD: < 20 %

RATED LIFE

- 50,000 hours (L70)

WARRANTY

- 5 Year Limited Warranty
- NLB Trusted Warranty Program
- 2 Year Warranty on Battery

ORDERING GUIDE






EX	V	EL	AL
PRODUCT NAME	GENERATION	FEATURE	MATERIAL
EX = Exit Sign	V = Value Class	EL = Edge Lit	AL = Aluminum Body

ORDERING INFORMATION

ITEM #	ORDERING ABBREVIATION	WATTAGE (W)	INPUT VOLTAGE (V)	TOTAL LUMENS (LM)	LPW	FINISH
67680	EXVELAL	2.5	120-277	15	6	ALUMINUM

PHYSICAL INFORMATION

DESCRIPTION	LENGTH	WIDTH	HEIGHT	WEIGHT
67680	12.2 in (310 mm)	9.72 in (247 mm)	1.81 in (46 mm)	1.15 lbs (0.52 kg)

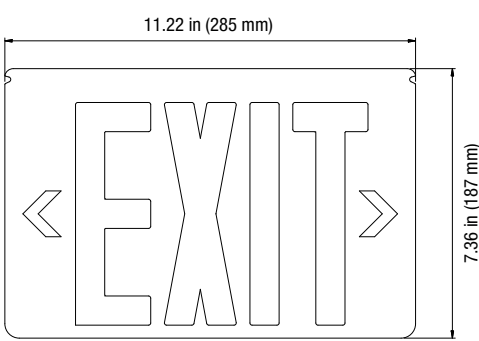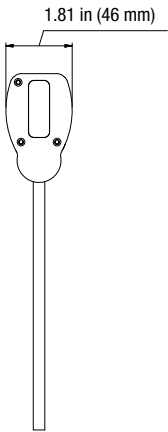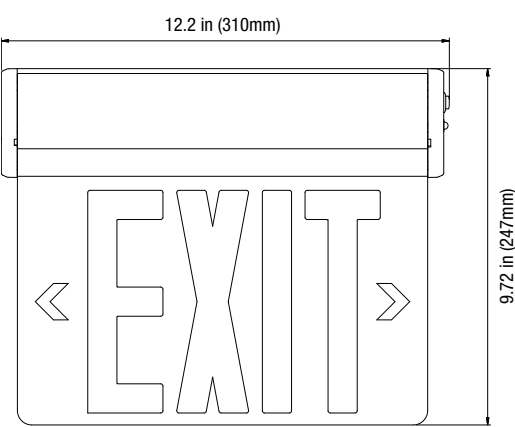

INSTALLATION



INSTALLATION
GUIDE



LEDVANCE NORTH AMERICAN HEADQUARTERS

LEDVANCE LLC.
181 Ballardvale Street, Suite 203
Wilmington, MA 01887
Phone: +1 978 753 5000

LEDVANCE CANADIAN HEADQUARTERS

LEDVANCE LTD./LTE.
5450 Explorer Drive, Suite 100
Mississauga, Ontario L4W 5N1
Phone: +1 905 361 93 33

LEDVANCE.COM/EN-US

LEDVANCE is a registered trademark.
All other trademarks are those of their respective owners.
Specifications subject to change without notice.

© 2026 LEDVANCE LLC