

LEDVANCE LUMINAIRES

EXIT & EMERGENCY WET LOCATION

LEDVANCE LUMINAIRE SPECIFICATION DATA

Catalog #	Comments
Project	
Type	
Prepared by	

VALUE CLASS™



DESCRIPTION

This EXIT AND EMERGENCY WET LOCATION fixture delivers robust performance and reliability, making it ideal for high-traffic and critical-access areas. Engineered for durability and compliance with stringent safety standards, it ensures clear visibility and efficient illumination in wet conditions. Its versatile design and ease of installation provide significant value for demanding environments, enhancing safety and operational efficiency.

APPLICATIONS

- General lighting
- Grocery and Retail
- Healthcare
- Industrial areas
- Loading docks and Warehouses
- Manufacturing facilities
- Multi-family residential
- Retail spaces
- Storage areas

RATED LIFE

- 50,000 hours (L70)



LEDLUM295 7-26

BUILT-IN LITHIUM BATTERY

Provides a minimum of 90 minutes of emergency illumination during outages to support safety, security, and code-related needs

EXIT AND COMBO UNIT OPTIONS

Supports flexible egress lighting configurations for a range of emergency applications

OPTIONS

Both Red and Green letters shipped in box. Provides practical performance benefits that support easier installation, reliable operation, and application flexibility

INPUT VOLTAGE

Available in 120-277V

MULTIPLE MOUNTING OPTIONS

Wall, side, or ceiling mount (exit only)

POLYCARBONATE HOUSING

Enhances durability and long-term reliability, especially in demanding or harsh environments

POLYCARBONATE LENS

UV-stabilized, impact-resistant lens delivers lasting durability in harsh environments

WET LOCATION RATED

Provides practical performance benefits that support easier installation, reliable operation, and application flexibility

CERTIFICATIONS & LISTINGS

- FCC Compliant
- cULus listed to UL1598 and CSA C22.2 No. 250.0 Standards
- UL924
- IP65 Rated
- RoHS Compliant
- Title 20

AMBIENT OPERATING TEMPERATURE

- 4 °F to 104 °F (-20 °C to 40 °C)

ELECTRICAL

- Input Voltage: 120-277V
- Power Factor: ≥0.90
- THD: < 20 %

WARRANTY

- 5 Year Limited Warranty
- NLB Trusted Warranty Program
- 2 Year Warranty on Battery

ORDERING GUIDE

EML	XX	WL	XXX	WH
PRODUCT NAME	GENERATION	FEATURE	CONFIGURATION	COLOR
EML = Emergency Light	V = Value Class EX = Exit Sign	WL = Wet Location	DF = Double Face THR = Twin Head Round RG = Red/Green Letters	WH = White


ORDERING INFORMATION

ITEM #	ORDERING ABBREVIATION	WATTAGE (W)	INPUT VOLTAGE (V)	CCT (K)	TOTAL LUMENS (LM)	LPW	FINISH
67678	EMLVWLWH	0.8	120-277	6500	167	139	White
67681	EXVWLDFWH	2.5	120-277	–	6	2	White
67885	EXVWLTHRRGWH	2.5	120-277	–	6	2.4	White


PHYSICAL INFORMATION

DESCRIPTION	LENGTH	WIDTH	HEIGHT	WEIGHT
67681	12.6 in (320.00 mm)	8.07 in (205 mm)	2.504 in (63.6 mm)	2.76 lbs (1.25 kg)
67885	12.598 in (320 mm)	13.307 in (338.00 mm)	2.5 in (63.6 mm)	3.32 lbs (1.505 kg)
67678	11.97 in (304.00 mm)	5.18 in (131.60 mm)	4.0 in (103 mm)	1.72 lbs (0.778 kg)


67678

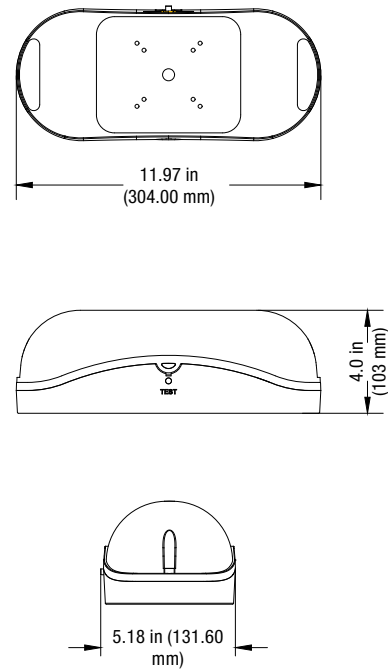

67681

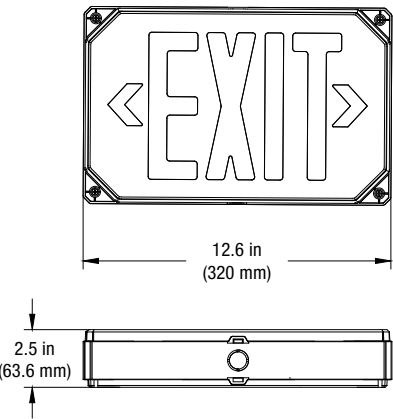

67885

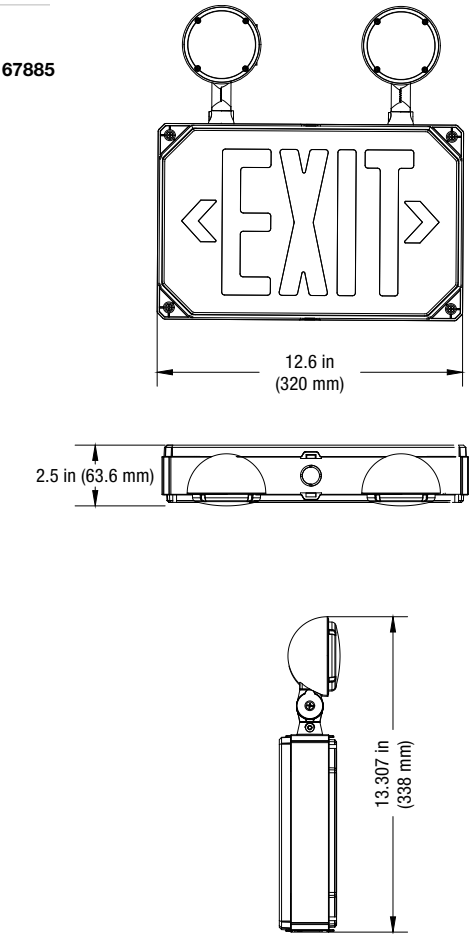

INSTALLATION



INSTALLATION
GUIDE
(67681 & 67885)



INSTALLATION
GUIDE
(67678)



LEDVANCE NORTH AMERICAN
HEADQUARTERS

LEDVANCE LLC.
181 Ballardvale Street, Suite 203
Wilmington, MA 01887
Phone: +1 978 753 5000

LEDVANCE CANADIAN
HEADQUARTERS

LEDVANCE LTD./LTE.
5450 Explorer Drive, Suite 100
Mississauga, Ontario L4W 5N1
Phone: +1 905 361 93 33

LEDVANCE.COM/EN-US

LEDVANCE is a registered trademark.
All other trademarks are those of their respective owners.
Specifications subject to change without notice.

© 2026 LEDVANCE LLC