



LEDVANCE LUMINAIRES

EMERGENCY LIGHT STEEL BODY

LEDVANCE LUMINAIRE SPECIFICATION DATA

Catalog #	Comments
Project	
Type	
Prepared by	

VALUE CLASS™



BUILT-IN LITHIUM BATTERY

Provides up to 90 min battery run time: Provides emergency illumination during outages to support safety, security, and code-related needs

COLD-ROLLED STEEL HOUSING

Functionality, durability, and design offering excellent heat dissipation

DAMP LOCATION RATED

Suitable for damp spaces for broader application flexibility

INPUT VOLTAGE

Available in 120-277V

POLYCARBONATE LENS

UV-stabilized, impact-resistant lens delivers lasting durability in harsh environments

DESCRIPTION

Constructed from SPCC cold-rolled steel, this emergency light delivers a durable, precision-formed housing with a smooth, powder-coat-ready finish. A high-impact polycarbonate lens enhances performance by providing superior light diffusion and added protection, ensuring reliable illumination for safe egress in demanding commercial environments.

APPLICATIONS

- General lighting
- Grocery and Retail
- Healthcare
- Industrial areas
- Loading docks and Warehouses
- Manufacturing facilities
- Multi-family residential
- Retail spaces
- Storage areas

CERTIFICATIONS & LISTINGS

- FCC Compliant
- UL 924
- cULus listed to UL1598 and CSA C22.2 No. 250.0 Standards
- RoHS Compliant
- Title 20
- Suitable for Damp Locations

AMBIENT OPERATING TEMPERATURE

- 4 °F to 104 °F (-20 °C to 40 °C)

ELECTRICAL

- Input Voltage: 120-277V
- Power Factor: ≥0.90
- THD: < 20 %

RATED LIFE

- 50,000 hours (L70)

WARRANTY

- 5 Year Limited Warranty
- 2 Year Warranty on Battery
- NLB Trusted Warranty Program



ORDERING GUIDE


EML	V	S	WH
PRODUCT NAME	GENERATION	MATERIAL	COLOR
EML = Emergency Light	V = Value Class	S = Steel Body	WH = White

ORDERING INFORMATION

ITEM #	ORDERING ABBREVIATION	WATTAGE (W)	INPUT VOLTAGE (V)	CCT (K)	TOTAL LUMENS (LM)	LPW	FINISH
67679	EMLVSWH	5.6	120-277	6500	720	120	White

PHYSICAL INFORMATION

DESCRIPTION	LENGTH	WIDTH	HEIGHT	WEIGHT
67679	13.78 in (350 mm)	10.433 in (265 mm)	3.15 in (80 mm)	4.57 lbs (2.075 kg)

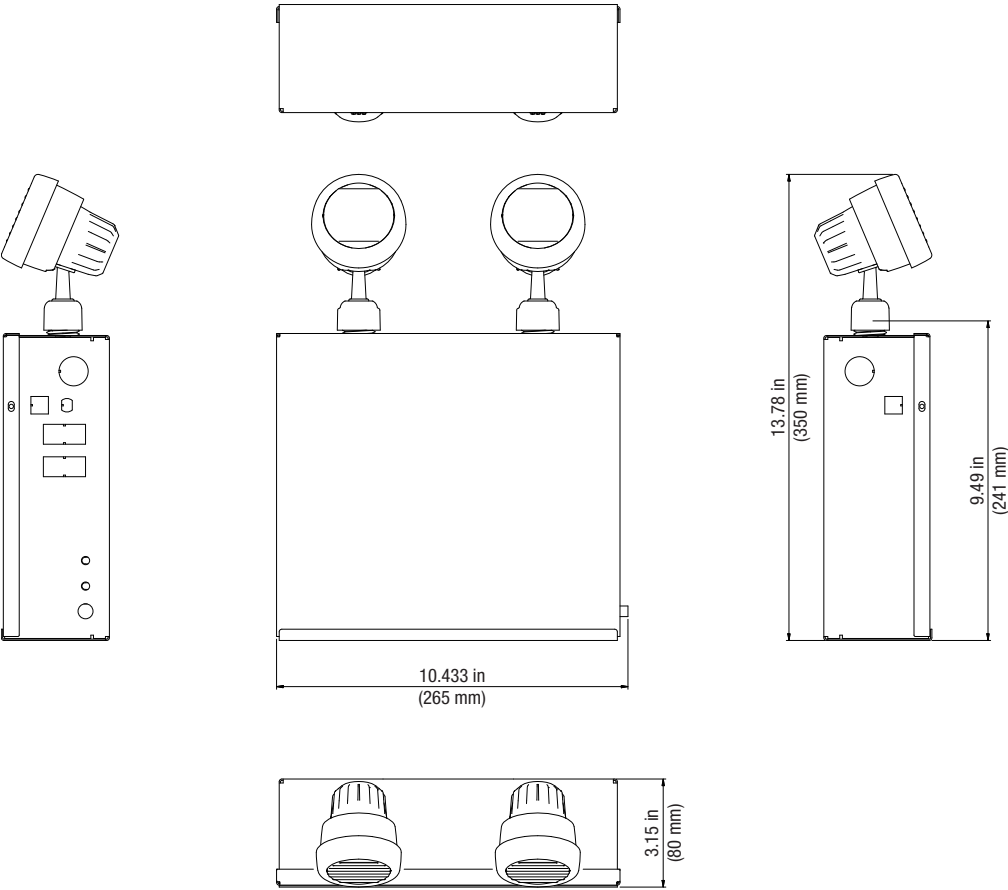

INSTALLATION



INSTALLATION
GUIDE



LEDVANCE NORTH AMERICAN HEADQUARTERS

LEDVANCE LLC.
181 Ballardvale Street, Suite 203
Wilmington, MA 01887
Phone: +1 978 753 5000

LEDVANCE CANADIAN HEADQUARTERS

LEDVANCE LTD./LTE.
5450 Explorer Drive, Suite 100
Mississauga, Ontario L4W 5N1
Phone: +1 905 361 93 33

LEDVANCE.COM/EN-US

LEDVANCE is a registered trademark.
All other trademarks are those of their respective owners.
Specifications subject to change without notice.

© 2026 LEDVANCE LLC