



LEDVANCE LUMINAIRES

EXIT SIGNS AND EMERGENCY LIGHTING – CANADA

LEDVANCE LUMINAIRE SPECIFICATION DATA

Catalog #	Comments
Project	
Type	
Prepared by	

VALUE CLASS™



DESCRIPTION

The LEDVANCE Exit Signs and Emergency Lighting solutions provide reliable life safety illumination for a wide range of commercial, industrial, and institutional applications. Featuring energy-efficient LED technology, the portfolio includes edge-lit designs, steel-body constructions, wet location-rated models, emergency battery backup, self-diagnostics, and remote-head capability. Designed for dependable performance and easy installation, these solutions help support building safety and code compliance.

BENEFITS & FEATURES

- Available in thermoplastic, steel-body, and edge-lit designs for a variety of applications
- Self-diagnostic and remote-capable models available
- High-visibility illumination designed to support safe egress and life safety requirements
- Wet location options available for outdoor applications

OPERATING TEMPERATURE

- 0°C to +40°C (-32°F to +104°F)
- -20°C to +40°C (-4°F to +104°F)

INSTALLATION

- Universal j-box mounting pattern
- Snap canopy for top or end mounting included

APPLICATION

- Ideal for commercial, industrial, institutional, and public facilities

WARRANTY

- 5 year
- 2 or 3 year on battery (model dependent)

ELECTRICAL

- 120-347V_{AC}

RATED LIFE

- 50,000 hours (L₇₀)

CERTIFICATIONS & LISTINGS

- cULus listed to CSA 22.2 No. 250 and CSA 22.2 No. 141 standards
- ICES
- RoHS
- Damp location (Indoor products) or Wet Location rated (Outdoor products)
- FCC



ORDERING GUIDE

XXXXXX	/ XXX	/ XXX	/ XX	XX
PRODUCT NAME	GENERATION	CONFIGURATION	COLOR	OPTIONS
EX = Exit REMOTE = Remote Head	V = Value Class LED = LED	THR = Twin Head Round RM = Running Man 1I = 1 Head Indoor 2I = 2 Head Indoor 1O = 1 Head Outdoor 2O = 2 Head Outdoor EL = Edgelit WL = Wet Location S = Steel Body	WH = White* GR = Gray	R = Remote Capable SD = Self-Diagnostic

*Off white, not bright white.


ORDERING INFORMATION

ITEM #	ORDERING ABBREVIATION	WATTAGE (W)	INPUT VOLTAGE (V)	COLOR TEMP (CCT)	TOTAL FIXTURE LUMENS (LM)	DETAILS	IMAGE
66076	REMOTE/LED1I/WH	1.2	3.5-15	6500K	100	Indoor, one head	
66077	REMOTE/LED2I/WH	2.4	3.5-15	6500K	200	Indoor, two heads	
66078	REMOTE/LED1O/GR	1.2	3.5-15	6500K	100	Outdoor, one head	
66079	REMOTE/LED2O/GR	2.4	3.5-15	6500K	160	Outdoor, two heads	
66073	EXV/RM/WH/SD	2	120-347	6500K	6	Self-diagnostic	
66071	EXV/RM/THR/WH/RSD	3.2	120-347	6500K	200	Twin Head Round, Remote Capable, Self-diagnostic	
67430	EXV/RM/EL/WH	2.5	120-347	6500/8000K *	27/10 **	Edgelit	
67431	EXV/RM/WL/WH	2.5	120-347	6500/8000K *	25/10 **	Wet location	
67432	EXV/RM/WL/THR/WH	2.5	120-347	6500/8000K *	25/145 **	Wet location, Twin Head Round	
67433	EXV/RM/S/WH	2.5	120-347	6500/8000K *	22/10 **	Steel body	
67434	EXV/RM/S/THR/WH	2.5	120-347	6500/8000K *	22/140 **	Steel body, Twin Head Round	


*without placard/with placard
**AC mode / EM mode

PHYSICAL INFORMATION


66071

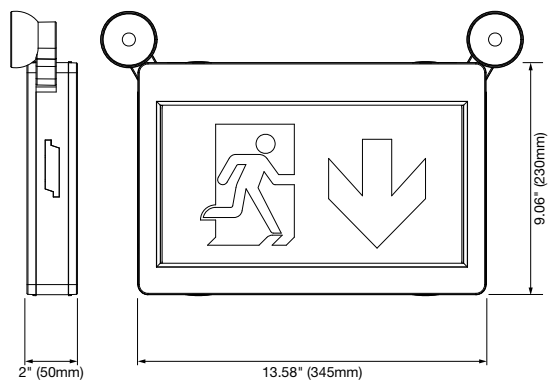


66073

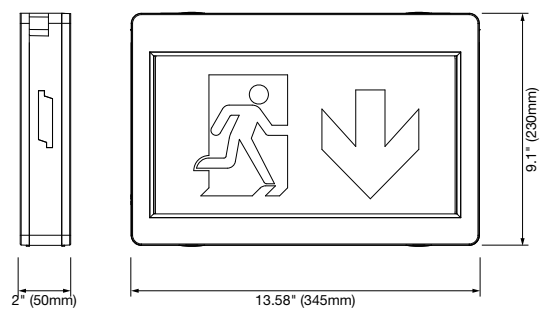


66076




66077

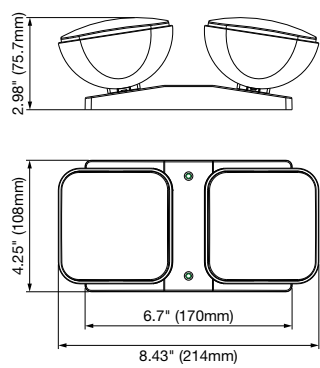


66078

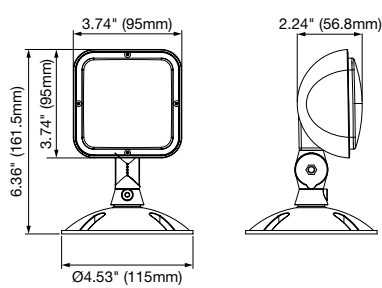


66079

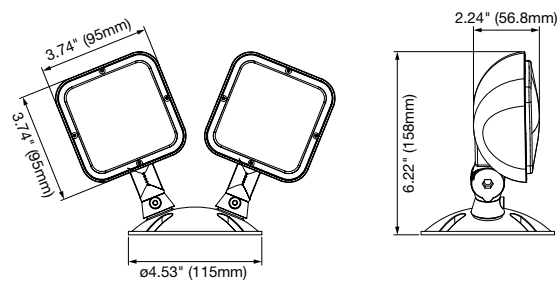


67430

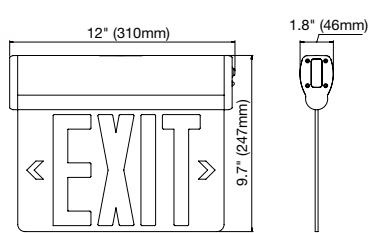


67431

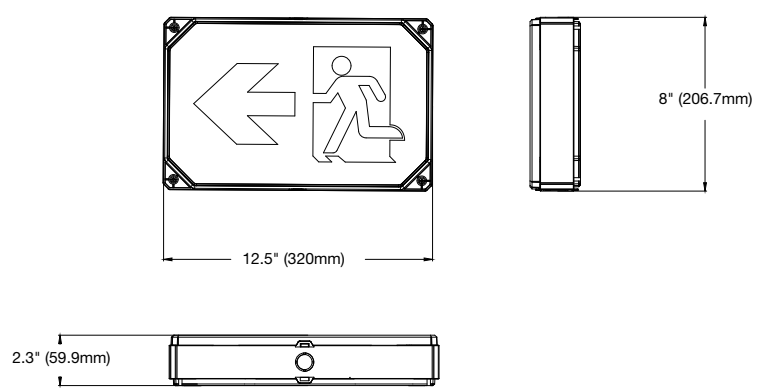


67432

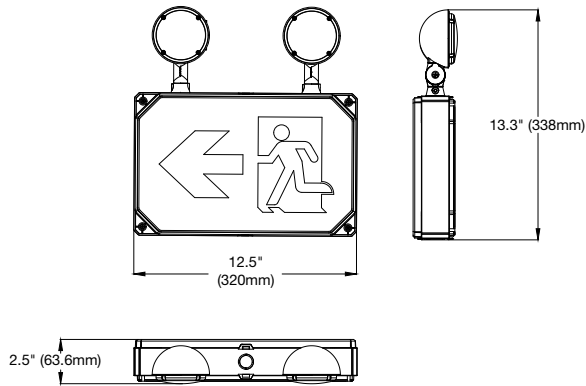

67433

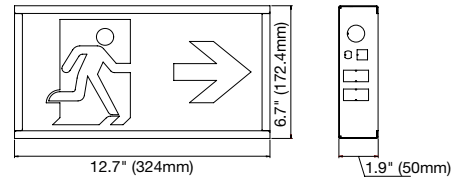

67434

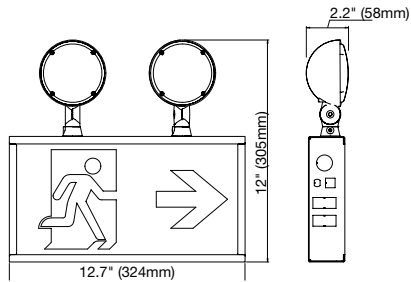

APPLICATION NOTES

- Built-in battery for minimum 90 minutes emergency operation.
- 24 hours for full recharge time.
- Test switch and charge indicator.
- See individual installation guides for max mounting heights to achieve 1 footcandle.
- LEDVANCE recommends using only LEDVANCE remote heads with exit and/or emergency luminaires. Failure to do so may cause incompatibility.
- 3.6V DC supplied to remote heads allowing the wattage to not exceed the maximum allowable wattage.



LEDVANCE CANADIAN HEADQUARTERS

LEDVANCE LTD./LTE.
5450 Explorer Drive, Suite 100
Mississauga, Ontario L4W 5N1
Phone: +1 905 361 93 33

LEDVANCE.COM/EN-US

LEDVANCE is a registered trademark.
All other trademarks are those of their respective owners.
Specifications subject to change without notice.

© 2026 LEDVANCE LLC