
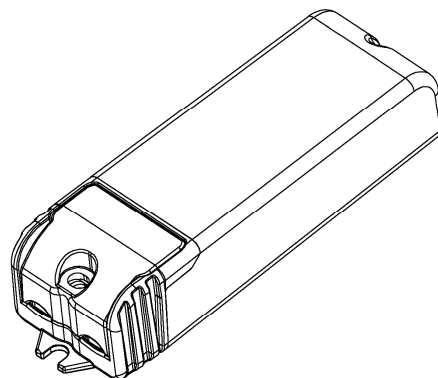
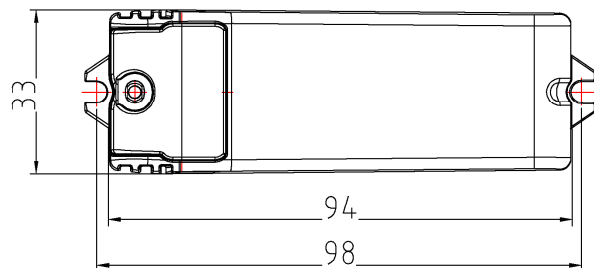



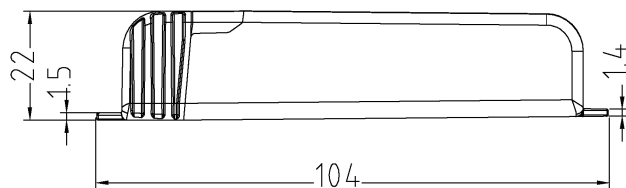


Use the same cable sheath diameters for primary and secondary sides.

Wire stripping:

Sheath = 1.0 cm [A]

Conductors = 0.6 cm [B]

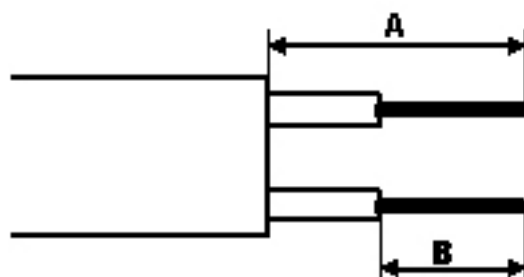

Wiring with dimmer | Verdrahtung mit Dimmer

