

SYLVANIA Lamps

ULTRA LED™ MR16

Application

The new ULTRA LED Glass MR16 lamps make halogen retrofits easier to spot relamp to a more energy efficient lamp. With its sleek design, the ULTRA MR16 Glass portfolio is now available in a 20W, 35W and 50W replacement as well as Narrow Flood and Flood beam angles.

Benefits and Features

- Longer life than traditional halogen lamps
- No warm-up time, instant on with full light output and stable color
- Ideal for re-lamping when halogen lamps reach end of life
- Glass body with the look and feel of traditional halogen lamps
- Suitable for use in damp locations
- 12V AC/DC input voltage
- UV and IR free
- Mercury and lead free
- Offered in 5, 6, 7 or 8 watts
- Up to 90 LPW
- CRI >80
- Available beam angles: 15°, 25° and 35°

Electrical

- 12V_{DC}
- Power factor >0.90
- Dimmable

Rated Life

- 25,000 hours (L₇₀)

Warranty

- 3-year
- NLB Trusted Warranty Program

Ambient Operating Range

- -4°F to 104°F (-20°C to 40°C)



Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
Halogen	20	5	75%
Halogen	35	6	83%
Halogen	50	7	86%
Halogen	50	8	82%

Certifications and Listings

- cETLus
- RoHS
- Lead Free
- Mercury Free

Installation

- Only install in operating environments ranging between -20°C and +40°C (-4°F and +104°F).
- Not intended for use in emergency light fixtures or exit signs.
- Suitable for damp locations – not for use where directly exposed to water.
- Use only with Class 2 power supply.



Catalog #	Type
Project	
Comments	
Prepared by	

Ordering Guide

LED	X	MR16	DIM	X	XX	XXX	XX	GL	RP
Lamp technology	Wattage	Lamp Type	Dimmable	CRI	CCT	Beam Angle	Beam Angle	Material	Packaging
LED	5 = 5 Watts 6 = 6 Watts 7 = 7 Watts 8 = 8 Watts	MR16		8 = 80+	27 = 2700K 30 = 3000K	SP = Spot NFL = Narrow Flood FL = Flood	15 = 15° 25 = 25° 35 = 35°	GL = Glass	RP = Retail Pack


Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Base Type	Material	Replaces	Input Voltage	Average Life (hrs) ¹	CCT ²	Typical Lumens (lm) ³	CBCP	Beam Angle	CRI ⁴
78232	LED5MR16DIM827NFL25GLRP 6/CS 1/SKU	5	GU5.3	Glass	20W Halogen	12	25,000	2700K	350	975	25°	80+
78231	LED5MR16DIM827FL35GLRP 6/CS 1/SKU	5	GU5.3	Glass	20W Halogen	12	25,000	2700K	350	650	35°	80+
78234	LED5MR16DIM830NFL25GLRP 6/CS 1/SKU	5	GU5.3	Glass	20W Halogen	12	25,000	3000K	350	975	25°	80+
78233	LED5MR16DIM830FL35GLRP 6/CS 1/SKU	5	GU5.3	Glass	20W Halogen	12	25,000	3000K	350	650	35°	80+
78240	LED6MR16DIM830NFL25GLRP 6/CS 1/SKU	6	GU5.3	Glass	35W Halogen	12	25,000	3000K	450	2000	25°	80+
78239	LED6MR16DIM830FL35GLRP 6/CS 1/SKU	6	GU5.3	Glass	35W Halogen	12	25,000	3000K	450	1000	35°	80+
41375	LED7MR16DIM827NFL25GLRP 6/CS 1/SKU	7	GU5.3	Glass	50W MR16	12	25,000	2700K	700	2323	25°	80+
41376	LED7MR16DIM827FL35GLRP 6/CS 1/SKU	7	GU5.3	Glass	50W MR16	12	25,000	2700K	700	1315	35°	80+
41378	LED7MR16DIM830NFL25GLRP 6/CS 1/SKU	7	GU5.3	Glass	50W MR16	12	25,000	3000K	700	2323	25°	80+
41379	LED7MR16DIM830FL35GLRP 6/CS 1/SKU	7	GU5.3	Glass	50W MR16	12	25,000	3000K	700	1315	35°	80+
48056	LED8MR16DIM827SP15 6/CS 1/SKU	8	GU5.3	Plastic	50W MR16	12	25,000	2700K	700	7000	15°	80+
48057	LED8MR16DIM830SP15 6/CS 1/SKU	8	GU5.3	Plastic	50W MR16	12	25,000	3000K	700	7000	15°	80+

1. Hours lifetime with 70% (L70) lumen maintenance 2. Thermally stable typical CCT (±10%) 3. Thermally stable typical lumens (±10%) 4. CRI – Color Rendering Index

Physical Information

	(A) Height inches (mm)	(B) Diameter inches (mm)
MR16, all wattages	1.73 (43.9)	1.98 (50.5)

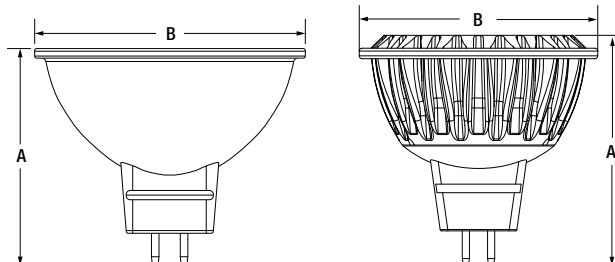

LEDVANCE LLC

181 Ballardvale Street, Suite 203

Wilmington, MA 01887 USA

Phone 1-800-LIGHTBULB (1-800-544-4828)

www.ledvanceUS.com

SYLVANIA and LEDVANCE are registered trademarks.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.



SCAN TO FOLLOW US
ON SOCIAL MEDIA