



Ningbo TengLi Testing Co., Ltd

2nd floor, Block B, Ningbo Testing and Certification Base, No. 66
Qingyi Road, Ningbo National Hi-Tech Zone, Ningbo, Zhejiang
Tel: 86574-8783 6802
Fax: 86574-8783 5902

In Situ Temperature Measurement Test Report

For

LEDVANCE LLC

(Brand Name: LEDVANCE, SYLVANIA)

200 BALLARDVALE STREET WILMINGTON, MA 01887

Model name(s):
LEDLD2A900ST9SC3WH

Type of Luminaire: Downlights
Report Date: 2022-02-16
Ningbo TengLi Testing Co., Ltd

Prepared By: 2nd floor, Block B, Ningbo Testing and Certification Base,
No. 66 Qingyi Road, Ningbo National Hi-Tech Zone,
Ningbo, Zhejiang

Test & Report By:

Nick Song

Engineer: Nick Song

Review By:

Garman Mo

Manager: Garman Mo

Note: 1. The results contained in this report pertain only to the tested samples

2. This report does not imply product certification, approval, or endorsement by A2LA, or any agency of the Federal Government.



Table of Contents

| | |
|-------------------------------------|---|
| 1 General..... | 3 |
| 1.1 Product Information: | 3 |
| 1.2 Rated Values: | 3 |
| 1.3 Standards or methods..... | 4 |
| 1.4 Equipment list..... | 4 |
| 2 Test conducted and method..... | 5 |
| 2.1 Ambient Condition..... | 5 |
| 2.2 Temperature Stabilization | 5 |
| 2.3 Thermocouples..... | 5 |
| 2.4 Thermocouples contact | 5 |
| 3 Test Results | 6 |
| 3.1 Test Data: | 6 |
| 3.2 Test Photo:..... | 6 |
| 4. Product Photo..... | 8 |



1 General

1.1 Product Information:

| | | |
|---|-------------------|-----|
| Model Number | LEDLD2A900ST930WH | |
| Remark | N/A | |
| Representative (Tested) Model | LEDLD2A900ST930WH | |
| Model Difference | N/A | |
| SKU (if available) | N/A | |
| Type of Luminaire (for integral lamps, list base type and lamp type) | Downlights | |
| LED Manufacturer | Bridgelux, Inc | |
| LED Model | BXFN-27G-13H-98 | |
| Dimming | Dimmable | |
| Integral Controls | YES | |
| Sample Number | STD211233NB-B1 | |
| Date of Receipt | Feb.09,2022 | |
| Luminaire Aperture (for downlights) | -- | in. |
| Luminaire Length | -- | mm |
| Luminaires Width | -- | mm |
| Number of Units (modular products) | N/A | s |

1.2 Rated Values:

| | |
|---------------------------|-------------------------------|
| Rated Voltage / Frequency | 120Vac,60Hz |
| Nominal Power | 15W |
| Rated Initial Lamp Lumen | -- |
| Declared CCT | 2700K/3000K/3500K/4000K/5000K |



1.3 Standards or methods

The following standards are partly or totally used or referenced for test:

| No. | Name |
|-------------------|------------|
| ANSI/UL 1598:2008 | Luminaires |

1.4 Equipment list

| Equipment ID | Equipment Name | Last Calibration Date | Next Calibration Date |
|--------------|--------------------|-----------------------|-----------------------|
| ST-R-704 | Power Meter | 2022-01-03 | 2023-01-02 |
| ST-R-607 | Temperature Tester | 2022-01-03 | 2023-01-02 |



2 Test conducted and method

2.1 Ambient Condition

Test was conducted in an ambient temperature of $25 \pm 5^\circ\text{C}$. Ambient temperature variations above or below 25°C was subtracted from or added to temperatures recorded at points on the luminaire.

The ambient temperature was measured by a thermocouple which was immersed in 15ml of mineral oil in a glass container.

2.2 Temperature Stabilization

Temperatures were measured after they have stabilized when the test has been running for a minimum of 7.5 hours, or the test has been running for a minimum of 3 hours and three successive reading taken at 15 minutes intervals are with 1°C of another and are not rising.

2.3 Thermocouples

Type J thermocouple was used for temperature measurement. The thermocouple was 0.05mm²(30AWG), and complied with the requirements specified in ASTM MNL 12 and limits of error specified in NIST ITS 90 and ISA MC96.1.

2.4 Thermocouples contact

Thermocouples were in contact with the TMP LED location described in LM-80 test report. In order to gain the maximum temperature, if appropriate, more than one thermocouple were contact in these locations. For details information, please refer to clause 3.3 for the photo of thermocouple contact.

3 Test Results


| | | | |
|-------------------------|--|-------------------|---------|
| Test date | 2022-02-10 | Test Ambient | 25.1 °C |
| Sample No. | | LED Package Model | |
| STD211233NB-B1 | | BXFN-27G-13H-98 | |
| LED driver of Each Lamp | Measured LED working current (Max.) mA | | |
| 1 | 88.0 | | |

3.1 Test Data:




| | | | | | | | | |
|--|------------------|-------------------|---------|------------------|-------------------|---------------------------------|------------------|-------------------|
| Input Vol. | 120.0V | Input Current | 0.1364A | Input Wattage | 14.91W | Temperature stabilization time: | 500 min | |
| No. | Temperature (°C) | | No. | Temperature (°C) | | No. | Temperature (°C) | |
| | Measured | Corrected at 25°C | | Measured | Corrected at 25°C | | Measured | Corrected at 25°C |
| 1 | 68.6 | 68.5 | 2 | 68.3 | 68.2 | 3 | 67.8 | 67.7 |
| 4 | 67.6 | 67.5 | 5 | 67.9 | 67.8 | 6 | 66.9 | 67.0 |
| The highest in-situ measured temperature LED is 68.5°C | | | | | | | | |

3.2 Test Photo:

Ts Position:

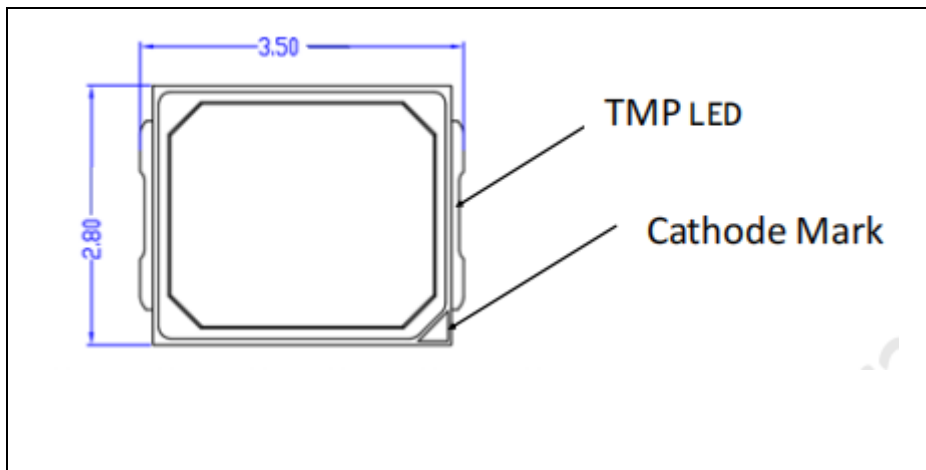


Thermocouple Location on Temperature Measurement Point (TMP):

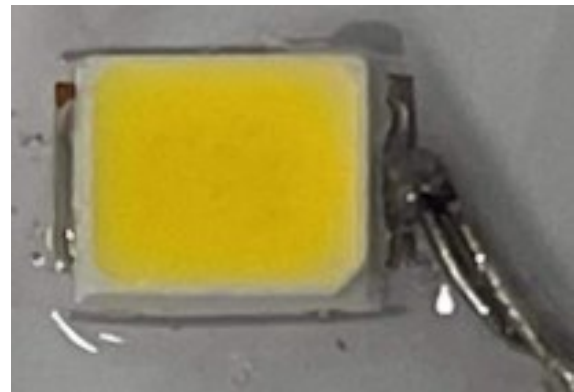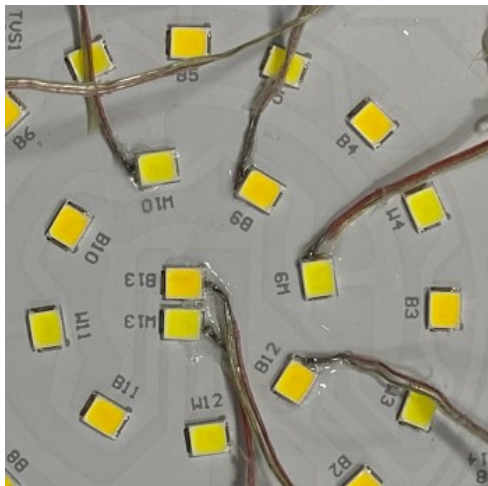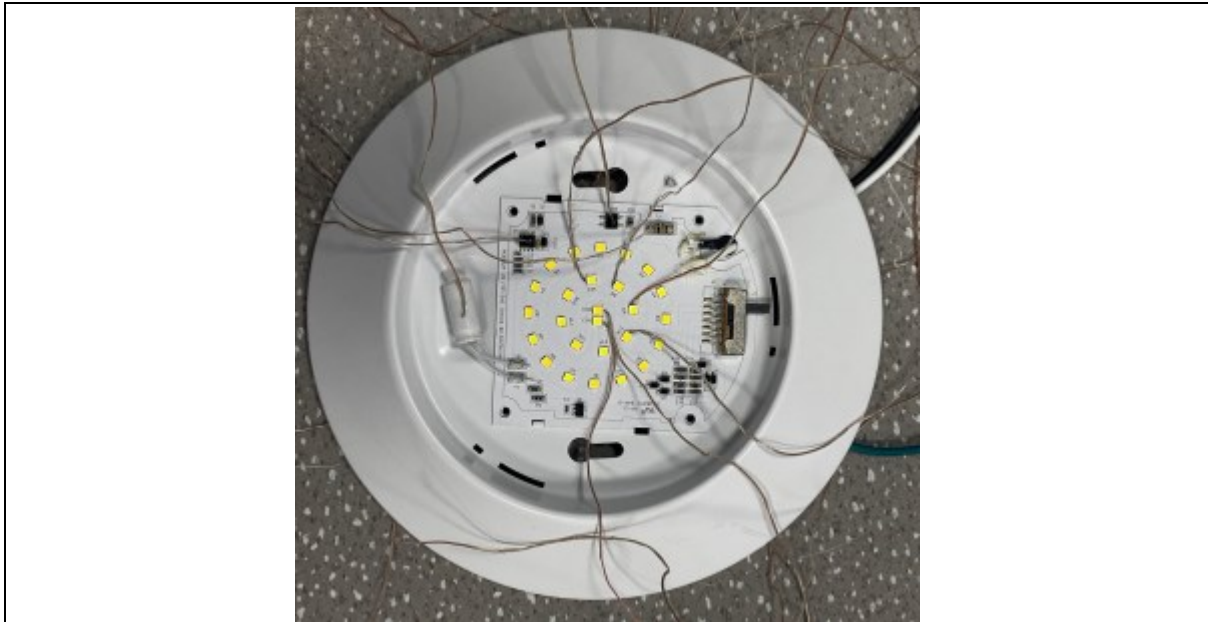

Results

| | |
|--|--------|
| Time (t) at which to estimate lumen maintenance (hours): | 50,000 |
| Lumen maintenance at time (t) (%): | 86.39% |
| Reported L70 (hours): | >72000 |

4. Product Photo

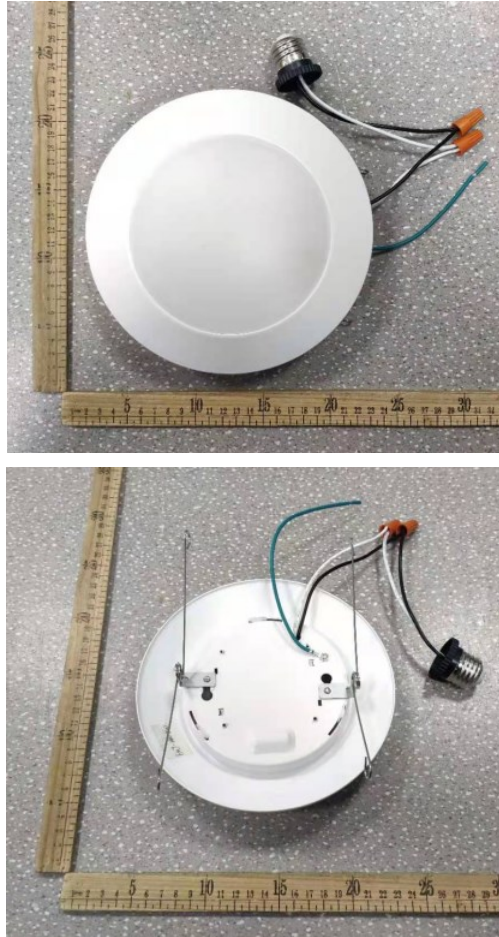

***** END OF THE TEST REPORT*****