




LEDVANCE Pty Ltd
Unit 3, 83 Derby St
Silverwater NSW 2128
Customer Service
Phone: 1300 467 726
E-mail: sales.au@ledvance.com

ARCHIPROFILE LINEAR BATTEN



ARCHIPROFILE LINEAR BATTEN

The ArchiProfile Linear Batten is a versatile lighting solution featuring multi-watt selectable options (40W/30W/20W) and tri-colour selection (3000K/3500K/4000K), making it ideal for a wide range of commercial applications. Available in both 4FT and 5FT sizes, it offers superior light quality with CRI90 and SDCM<3 @3000K&4000K, ensuring excellent colour consistency. Its flicker-free performance enhances visual comfort, and the inclusion of suspension kits allows for flexible installation. The seamless linkable feature enables easy connection of multiple units. A perfect blend of efficiency, performance, and adaptability in one sleek design.

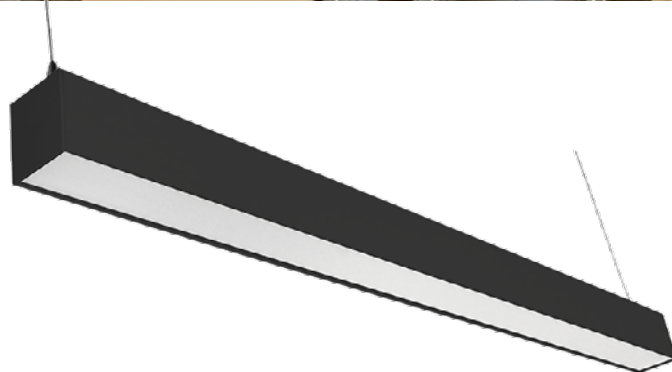

FEATURES AND BENEFITS



- Multi-watt selectable: 40/30/20W
- Tri colour selectable: 3000K/3500K/4000K
- Robust and seamless linkable feature for easy connection of multiple units
- Flicker-free performance for better visual comfort
- With a high CRI of 90 it ensures accurate colour rendering
- Colour consistency is maintained with SDCM<3 at 3000K and 4000K
- 2.2m suspension kits are included for easy installation

AREAS OF APPLICATION

- Commercial spaces
- Retail stores
- Office environments
- Showrooms
- Architectural and design-focused installations
- Workshops and studios



AVAILABLE SIZES

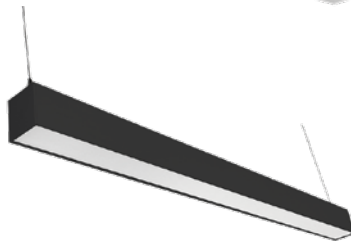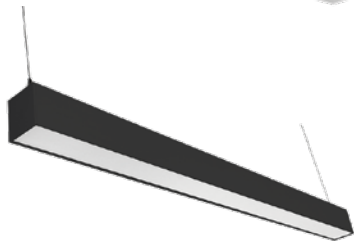

4FT
40/30/20W
L 1206mm x W 70mm x H 80mm
White or Black

5FT
40/30/20W
L 1506mm x W 70mm x H 80mm
White or Black

ACCESSORIES (SOLD SEPARATELY)



Joiner

SPECIFICATIONS


lm/W	125 lm/W
CCT	3000/3500/4000K
IP Rating	IP20
Dimmable	DALI2.0 (optional)
Housing Material	Die-cast Aluminium
Beam Angle	120°
CRI	>90
SDCM	<3 @3000K & 4000K
Electrical Classification	Class I
Connection Type	2.5m Flex & Plug

Driver Technology	Multi-watt selectable driver
Voltage	220-240V
PF	>0.9
Frequency	50/60Hz
Flicker Rate	Flicker Free
Mounting Type	Suspension (standard), Surface mount (optional), Recessed mount (optional)
Operating Temperature	-20°C to 40°C
Lifetime	50,000 hours
Warranty	5 years

PHOTOMETRICS

(Example of)

DIMENSIONS

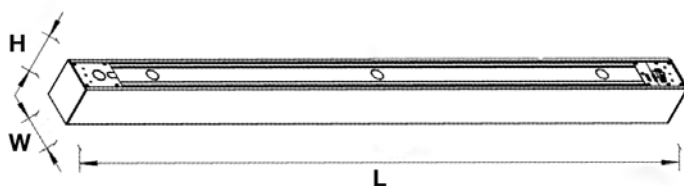

Model	L (mm)	W (mm)	H (mm)
LPB4F40MW	1206	70	80
LPB5F40MW	1506	70	80

ORDERING CODES - ARCHIPROFILE LINEAR BATTEN

Model number* (Order Code)	EAN10	Description	W	lm ¹	K		lm/W			
-------------------------------	-------	-------------	---	-----------------	---	---	------	---	---	---

WHITE

LPB4F40MWWH	4099854669989	LINEAR PROFILE BATTEN 4FT MW 40/30/20W UPTO 125LM/W 5000LM 3K/3.5K/4K CRI90 SDCM3 FLICKERFREE L1206*W70*80MM LINKABLE 2.2M SUSP.KITS & 2.5M F&P WH	40/ 30/ 20	5000/ 3750/ 2500	3000/ 3500/ 4000	120	125	1206	70	80
LPB5F40MWWH	4099854670510	LINEAR PROFILE BATTEN 5FT MW 40/30/20W UPTO 125LM/W 5000LM 3K/3.5K/4K CRI90 SDCM3 FLICKERFREE L1506*W70*80MM LINKABLE 2.2M SUSP.KITS & 2.5M F&P WH	40/ 30/ 20	5000/ 3750/ 2500	3000/ 3500/ 4000	120	125	1506	70	80

BLACK

LPB4F40MWBK	4099854669996	LINEAR PROFILE BATTEN 4FT MW 40/30/20W UPTO 125LM/W 5000LM 3K/3.5K/4K CRI90 SDCM3 FLICKERFREE L1206*W70*80MM LINKABLE 2.2M SUSP.KITS & 2.5M F&P BK	40/ 30/ 20	5000/ 3750/ 2500	3000/ 3500/ 4000	120	125	1206	70	80
LPB5F40MWBK	4099854670534	LINEAR PROFILE BATTEN 5FT MW 40/30/20W UPTO 125LM/W 5000LM 3K/3.5K/4K CRI90 SDCM3 FLICKERFREE L1506*W70*80MM LINKABLE 2.2M SUSP.KITS & 2.5M F&P BK	40/ 30/ 20	5000/ 3750/ 2500	3000/ 3500/ 4000	120	125	1506	70	80

*Denotes of Model Number: L-LEDVANCE; PB-Linear Profile Batten; 4/5F-4/5FT; 40MW-Multi Watt Up to 40W; WH-White; BK-Black

Model number* (Order Code)	EAN10	Description			
-------------------------------	-------	-------------	---	---	---

JOINER

(FOR A SEAMLESS JOIN WHEN CONNECTING MULTIPLE UNITS, A JOINER MUST BE PURCHASED SEPARATELY.)

LPBJR	4099854670008	JOINER FOR LINEAR PROFILE BATTEN	180	67	35
-------	---------------	----------------------------------	-----	----	----

SURFACE MOUNT FRAME

LPB4FSWH	4099854670022	SURFACE MOUNT FRAME FOR 4FT LINEAR PROFILE BATTEN WHITE (LPB4F40MWWH)
LPB4FSBK	4099854670046	SURFACE MOUNT FRAME FOR 4FT LINEAR PROFILE BATTEN BLACK (LPB4F40MWBK)
LPB5FSWH	4099854670398	SURFACE MOUNT FRAME FOR 5FT LINEAR PROFILE BATTEN WHITE (LPB5F40MWWH)
LPB5FSBK	4099854670411	SURFACE MOUNT FRAME FOR 5FT LINEAR PROFILE BATTEN BLACK (LPB5F40MWBK)

RECESSED KITS

LPB4FRWH	4099854670435	RECESSED KITS FOR 4FT LINEAR PROFILE BATTEN WHITE (LPB4F40MWWH)
LPB4FRMBK	4099854670459	RECESSED KITS FOR 4FT LINEAR PROFILE BATTEN BLACK (LPB4F40MWBK)
LPB5FRWH	4099854670473	RECESSED KITS FOR 5FT LINEAR PROFILE BATTEN WHITE (LPB5F40MWWH)
LPB5FRBK	4099854670497	RECESSED KITS FOR 5FT LINEAR PROFILE BATTEN BLACK (LPB5F40MWBK)

*Denotes of Model Number: L-LEDVANCE; PB-Profile Batten; 4/5F-4/5FT; JR-Joiner; S-Surface Mount Frame; R-Recessed Kits; WH-White; BK-Black

1 The Rated Lumen outputs are specified @3500K/4000K. Lumen outputs @3000K is 8% less than the above rated lumen outputs respectively.