



LEDVANCE Pty Ltd
Unit 3, 83 Derby St
Silverwater NSW 2128
Customer Service
Phone: 1300 467 726
E-mail: sales.au@ledvance.com

ARMOURLITE IK10 VANDALPROOF PC WEATHERPROOF BATTEN

ARMOURLITE IK10 VANDALPROOF PC WP BATTEN

The ArmourLite IK10 VandalProof PC Weatherproof Batten is a durable and high-performance lighting solution designed for harsh environments. With a multi-watt option of 20/17/14/10W, it offers flexible illumination in five colour temperatures from 3000K to 6500K. Made from UV-stabilized polycarbonate, it features IP66 and IK10 ratings, flick-free operation, multiple cable entry points, and optional sensor or DALI driver for enhanced control.



FEATURES AND BENEFITS

- Multi-watt selectable: 20/17/14/10W in 2FT
- Adjustable colour temperature: 3000K/4000K/5000K/5700K/6500K
- Made from UV-stabilized polycarbonate for enhanced durability
- IP66 and IK10 rating, ensuring reliable performance in harsh outdoor conditions
- Flick-free operation for improved visual comfort
- Multiple cable entry points for easy installation
- Optional sensor and DALI driver for advanced control
- Quick-to-fit encapsuled LED module for easy installation

AREAS OF APPLICATION

- Building Perimeters
- Public Facilities
- Railways
- Public Areas
- Educational Institutions
- Car Parks



AVAILABLE SIZES




2FT
20/17/14/10W
L 600mm x W 70mm x D 83mm

SPECIFICATIONS


lm/W	140 lm/W	Connection Type	PA16 Terminal
CCT	3000/4000/5000/ 5700/6500K	Voltage	220-240V AC
IP Rating	IP66	Input Current	48-96mA
IK Rating	IK10	PF	0.9
Dimmable	DALI optional	Frequency	50/60Hz
Sensor	Optional	Surge Protection	L-N> 1000V, L,N-G>2000V
Housing Material	Durable UV-stabilized polycarbonate	Flicker Rate	Flicker Free
Diffuser	Polycarbonate	Mounting Type	Surface mount
Beam Angle	115°	Operating Temperature	-30°C to 50°C
CRI	>80	Lifetime	50,000 hours
SDCM	<6	Warranty	5 years
Electrical Classification	Class I		

PHOTOMETRICS

(Example of LWPVP2F20MW)

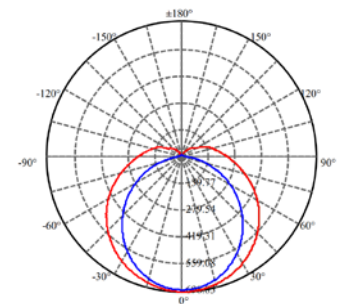

DIMENSIONS

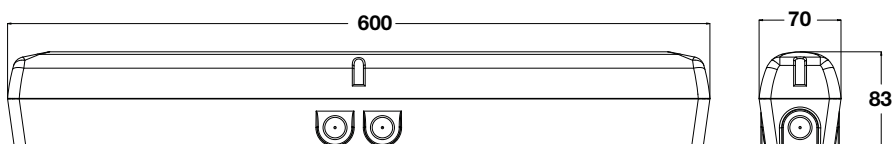

2FT
20/17/14/10W
L 600mm x W 70mm x D 83mm

ORDERING CODES - ARMOURLITE IK10 VANDALPROOF PC WP BATTEN

Model number* (Order Code)	EAN10	Description									
-------------------------------	-------	-------------	---	---	--	---	---	---	---	---	---

STANDARD

LWPVP2F20MW	4099854611117	ARMOURLITE VANDALPROOF 5CCT PC BATTEN 2FT MW 20/17/14/10W UPTO 140LM/W 2800LM IP66 IK10 3K/4K/5K/5.7K/6.5K L600*W70*H83MM FLICKERFREE	20/ 17/ 14/ 10	2800/ 2100/ 1400	3000/ 4000/ 5000/ 5700/ 6500	115	140	600	70	82	830
-------------	---------------	---	-------------------------	------------------------	--	-----	-----	-----	----	----	-----

SENSOR

LWPVP2F20MWS	4099854611131	ARMOURLITE VANDALPROOF 5CCT PC SENSOR BATTEN 2FT MW 20/17/14/10W UPTO 140LM/W 2800LM IP66 IK10 3K/4K/5K/5.7K/6.5K L600*W70*H83MM FLICKERFREE	20/ 17/ 14/ 10	2800/ 2100/ 1400	3000/ 4000/ 5000/ 5700/ 6500	115	140	600	70	82	830
--------------	---------------	---	-------------------------	------------------------	--	-----	-----	-----	----	----	-----

*Denotes of Model Number: L-LEDVANCE; WP-WeatherProof; VP-VandalProof PC; 2F-2FT; 20MW-Multi Watt up to 20W; S-Dim Sensor

1 The Rated Lumen outputs are specified @4000K/5000K/5700K/6500K. Lumen outputs @3000K is 8% less than the above rated lumen outputs respectively.