



CONSTRUCTION WEATHERPROOF BATTEN

AVAILABLE SIZE



40W
L 1140mm x W 75mm x H 66mm

FEATURES AND BENEFITS


- IK08 impact resistance ensures durability against knocks and tough site conditions
- IP65 weatherproof rating protects against dust and water, suitable for outdoor use
- 1.7m flex and plug allows quick, plug-and-play installation without hardwiring
- Emergency version (AS2293 Compliant) available for continued lighting during power outages

AREAS OF APPLICATION

- Temporary lighting on construction sites



DIMENSIONS

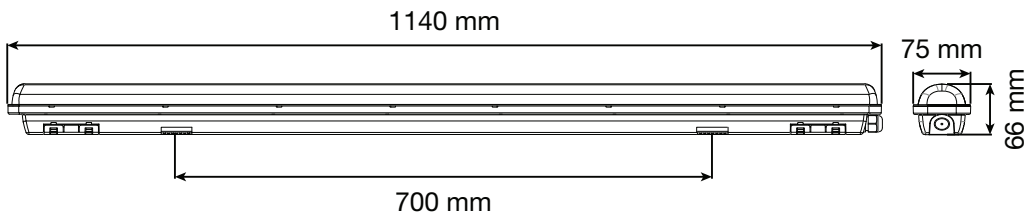

SPECIFICATION

Wattage	40W	Housing Material	Polycarbonate	Inrush Current	13A @195µs 240V AC
Lumens	4000			PF	>0.9
lm/W	100 lm/W	Beam Angle	120°	Frequency	50/60Hz
CCT	4000K	CRI	≥80	Surge Protection	2KV
IP Rating	IP65	SDCM	<5	Flicker Rate	Flicker Free
IK Rating	IK08	Electrical Classification	Class II	Installation Type	Surface mount Suspension (Suspension kits required)
Dimmable	No	Connection Type	1.7m Flex & Plug	Operating Temperature	Standard: -20°C to 40°C Emergency: 0°C to 40°C
Double Insulated	Yes	Driver Technology	Internal Driver	Lifetime	35000 hours
Emergency Battery	LiFePO4	Voltage	220-240V	Warranty	1 year
Emergency Duration	3 hours	Input Current	190mA		

ORDERING CODES

Model number* (Order Code)	EAN10	Description	W	lm	K	lm/W					
-------------------------------	-------	-------------	---	----	---	------	--	---	---	---	---

STANDARD

LWPT4F40W	4099854612008	CONSTRUCTION WP BATTEN 4FT 40W 4K 4000LM IP65 IK08 1.7M F&P L1140XW75XH66MM	40	4000	4000	100	✕	1140	75	66
-----------	---------------	--	----	------	------	-----	---	------	----	----

EMERGENCY (AS2293 COMPLIANT)



LWPT4F40WEM	4099854612015	CONSTRUCTION WP EMG BATTEN 4FT 40W 4K 4000LM IP65 IK08 1.7M F&P L1140XW75XH66MM	40	4000	4000	100	✕	1140	75	66
-------------	---------------	--	----	------	------	-----	---	------	----	----

Emergency Version Only

EMERGENCY BATTEN CLASSIFICATIONS		Maximum Spacings (M)														
		Mounting Height (M)														
		2.1	2.4	2.7	3	3.3	3.6	4	4.5	5	6	7	8	9	10	15
C0-C180	D63	19.4	20.3	21.1	21.8	22.4	23.0	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9	28.0
C90-C270	D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	19.1	19.5	20.2	20.6	20.7	20.6	20.3	14.6