

LEDVANCE.COM.AU



LEDVANCE

LEDVANCE Pty Ltd
Unit 3, 83 Derby St
Silverwater NSW 2128
Customer Service
Phone: 1300 467 726
E-mail: sales.au@ledvance.com

EZLITE CANOPY



VERSION 29/07/25

EZLITE CANOPY

Introducing the EzLite Canopy, a robust lighting solution available in multi-watt options of 150W, 120W, 100W, and 75W. This heavy-duty fixture features an elegant design and tri colour temperature options of 3000K, 4000K, and 5000K, providing versatility for various applications. Engineered for durability, the EzLite Canopy is IP66 and IK08 rated, ensuring reliable performance in demanding environments. Its innovative design allows for very fast and easy recessed installation below the ceiling, making it an ideal choice for both new installations and retrofits.



White



Black

FEATURES AND BENEFITS


- Multi-watt selectable: 150/120/100/75W
- Tri colour selectable: 3000K/4000K/5000K
- Clever mechanic design enables easy and quick recessed installation from below the ceiling
- High efficacy up to 160 lm/W, ensuring optimal brightness while maximizing energy efficiency
- Features durable construction with IP66 and IK08
- Includes optional DALI2.0 dimming and dimming sensor for advanced control

AREAS OF APPLICATION

- Building entrances
- Gas station canopies
- Car parks



AVAILABLE SIZES



150/120/100/75W
L 400mm x W 400mm x D 79mm

ACCESSORIES (SOLD SEPARATELY)



White



Black


Surface Mount Frame

SPECIFICATIONS


lm/W	150-160 lm/W	Connection Type	1.5m flex & plug
CCT	3000K/4000K/5000K	Voltage	100-277V AC
IP Rating	IP66	Input Current	415mA
IK Rating	IK08	PF	0.9
Dimmable	DALI2.0 (Optional)	Frequency	50/60Hz
Sensor	Microwave sensor (Optional)	Surge Protection	L-N> 4000V, L,N-G>4000V
Housing Material	Die-cast aluminium	Flicker Rate	Flicker Free
Diffuser	Tempered Glass	Mounting Type	Recessed mounting (Standard) Surface mounting Kits (Optional)
Beam Angle	120°	Operating Temperature	-30 ~ +50°C
CRI	>80	Lifetime	50000 hrs
SDCM	< 5	Warranty	5 years
Electrical Classification	Class I		

PHOTOMETRICS

(Example of LCP150MWWH @100W 3000K)



DIMENSIONS

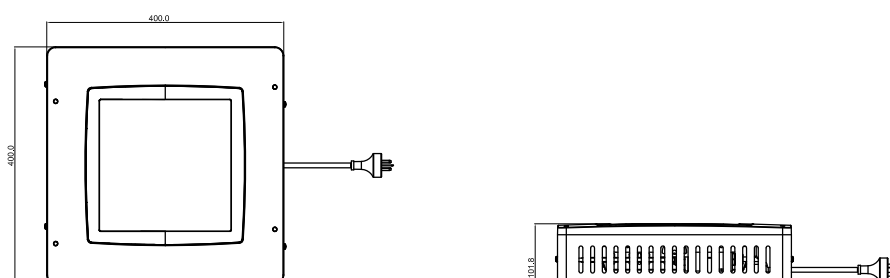

150/120/100/75W
Recessed mounting: L 400mm x W 400mm x D 79mm
With Surface Mounting Frame: L 400mm x W 400mm x D 102mm

ORDERING CODES - EZLITE CANOPY

Model number* (Order Code)	EAN10	Description	W	lm ¹	K					
WHITE										
LCP150MWWH	4099854523854	EZLITE CANOPY TC MW 150/120/100/75W UPTO 160LM/W 24000LM IP66 IK08 3K/4K/5K FAST RECESSED INSTALLATION WHITE	150/ 120/ 100/ 75	24000/ 19200/ 16000/ 12000	3000/ 4000/ 5000	120	160	400	400	79
BLACK										
LCP150MWBK	4099854523861	EZLITE CANOPY TC MW 150/120/100/75W UPTO 160LM/W 24000LM IP66 IK08 3K/4K/5K FAST RECESSED INSTALLATION BLACK	150/ 120/ 100/ 75	24000/ 19200/ 16000/ 12000	3000/ 4000/ 5000	120	160	400	400	79
SURFACE MOUNT FRAME										
LCPSMFWH	4099854581304	EZLITE CANOPY SURFACE MOUNT FRAME WHITE						400	100	83
LCPSMFBK	4099854581311	EZLITE CANOPY SURFACE MOUNT FRAME BLACK						400	100	83

*Denotes of Model Number: L-LEDVANCE; CP-Canopy; 150MW-Multi Watt Up to 150W; SMF-Surface Mount Frame; WH-White; BK-Black

¹ The rated lumen outputs are specified @4000K/5000K. Lumen outputs @3000K is 8% less than the above rated lumen outputs respectively.