

LEDVANCE.COM.AU




LEDVANCE

LEDVANCE Pty Ltd
Unit 3, 83 Derby St
Silverwater NSW 2128
Customer Service
Phone: 1300 467 726
E-mail: sales.au@ledvance.com

INDYGLOW LOWBAY

INDYGLOW LOWBAY

The IndyGlow Lowbay offers multi-watt selectable settings of 240W, 200W, 160W, and 120W, providing flexibility for various industrial applications. It features flicker-free technology to enhance visual comfort and reduce eye strain. With a high CRI >90 and excellent colour uniformity (SDCM <3), it delivers outstanding light quality and accurate colour rendering. Built for durability, it boasts an IK10 impact rating and IP65 protection. Its high efficacy of 145 lm/W ensures maximum energy savings and lower operating costs.

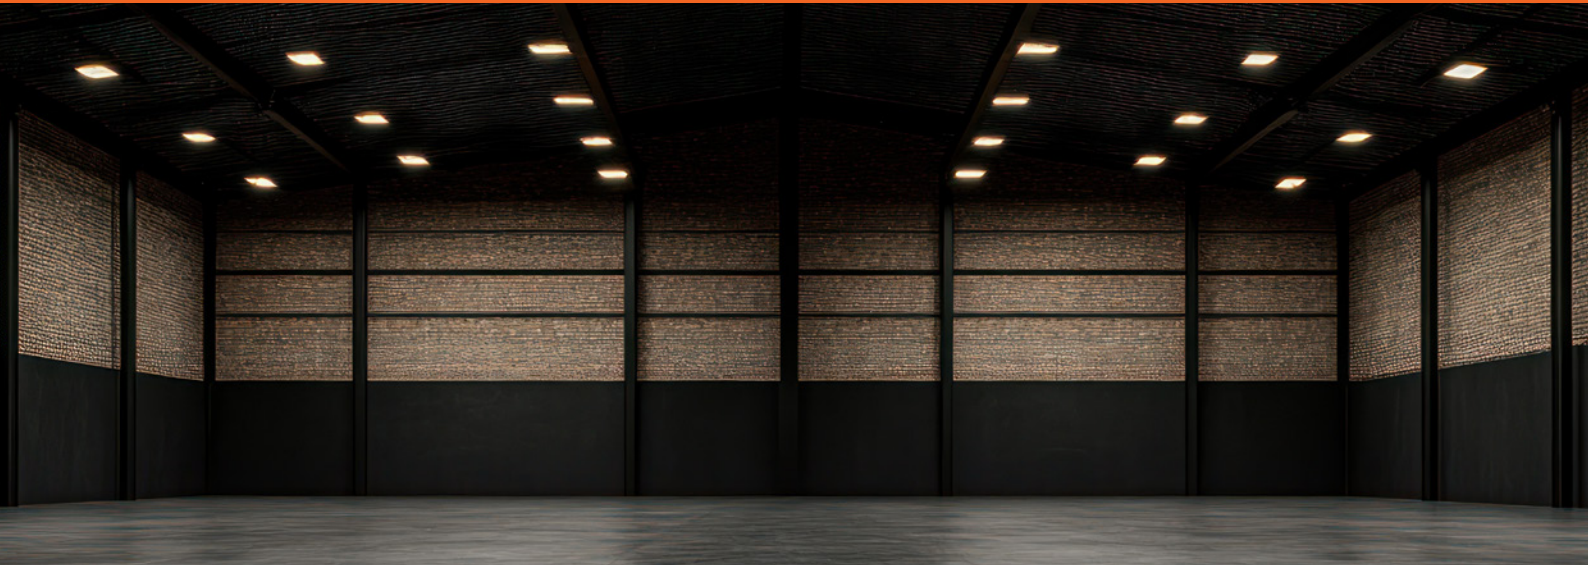

FEATURES AND BENEFITS

- Multi-watt selectable: 240/200/160/120W
- Flicker-free technology to ensure visual comfort in industrial environments
- High CRI >90 for enhanced colour accuracy and better visibility
- Excellent colour uniformity with SDCM <3 for consistent light quality
- Durable IK10 impact resistance and IP65 rating for tough industrial conditions
- High efficacy of 145 lm/W to maximise energy efficiency and reduce operating costs

AREAS OF APPLICATION

- Warehouses
- Cool rooms
- Car parks
- Service station canopies
- Clean room
- Food preparation areas
- Manufacturing facilities



AVAILABLE SIZES




LLB240MW
240/200/160/120W
L 600mm x W 600mm x H 138mm

SPECIFICATIONS



Multi Watt	240/200/160/120W	Voltage	100-277V AC
lm/W	145 lm/W	Frequency	50/60Hz
CCT	4000K	Input Current	1100mA Max
IP Rating	IP65	Inrush Current	80A@230V AC, 350 μ s
IK Rating	IK10	PF	>0.9
Dimmable	DALI2.0 optional	Surge Protection	L/N:6KV L/N-E:6KV
Housing Material	Cold rolled sheet	Flicker Rate	Flicker Free
Diffuser	Polycarbonate	Mounting Type	Surface mounting
Beam Angle	120°	Operating Temperature	-30°C to 50°C
CRI	>90	Lifetime	50,000 hours
SDCM	≤3	Warranty	5 years
Electrical Classification	Class I		
Connection Type	PA16 Terminal		

PHOTOMETRICS

(Example of LLB240MW @120W)

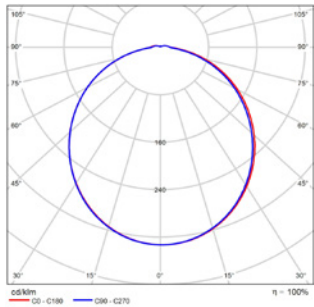

DIMENSIONS

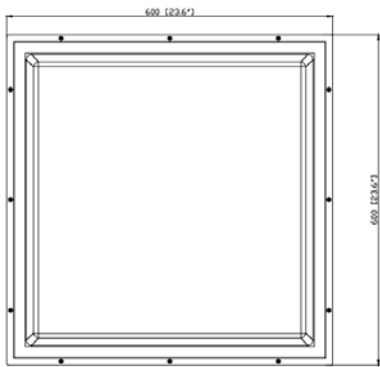

LLB240MW
240/200/160/120W
L 600mm x W 600mm x H 138mm

ORDERING CODES - INDYGLOW LOWBAY

Model number* (Order Code)	EAN10	Description								
LLB240MW	4099854523878	INDYGLOW LOWBAY MW 240/200/160/120W 4K 145LM/W UPTO 34800LM IK10 CRI90 3SDCM L600*W600*H138MM IP65 FLICKERFREE DIM10V	240/ 200/ 160/ 120	34800/ 29000/ 23200/ 17400	4000	120	145	600	600	138

*Denotes of Model Number: L-LEDVANCE; LB-LowBay; 240MW-Multi Watt Up To 240W