



LEDVANCE

FLOODLIGHTS

LEDVANCE | POWER THROUGH LIGHT

FLOODLIGHTS



HouseGuard Security Floodlight

1



HelioLux 4-CCT Solar Floodlight

2



Value Plus Low Profile Floodlight

3



Value Plus Tri-Colour Floodlight

4



Value Plus RGBA Floodlight

5



Value Plus RGBW Floodlight

6



Areaster Area Light

7



Areaster Area Light Accessories

8



MaxPro Floodlight

9



Sportsliter Professional Floodlight

10


HouseGuard Security Floodlight



FEATURES AND BENEFITS

- Tri-colour selectable and multi-directional swivelable heads for versatile security lighting options
- Polycarbonate body with built-in aluminum for longevity
- Corrosion-resistant, ideal for coastal areas
- Motion sensor with over-ride function by mains switch
- Wall / ceiling mounted, suitable for installation under eaves
- Double insulated

DIMENSIONS

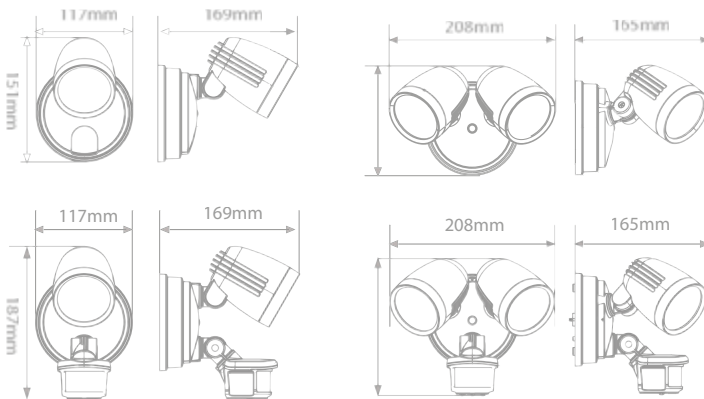

Model		L (mm)	W (mm)	H (mm)
FL12WTCBK	FL12WTCWH	169	117	151
FL12WTCMSBK	FL12WTCMSWH	169	117	187
FL24WTCBK	FL24WTCWH	165	208	137
FL24WTCMSBK	FL24WTCMSWH	165	208	173

ORDERING CODES

Model Number* (Order Code)	Wattage (W)	CCT (K)	Lumen ¹ (LM)	Finish Colour	Product Code (EAN10 Code)
FL12WTCBK	12	3000/4000/6500	1104/1200/1200	BLACK	4099854838279
FL12WTCMSBK	12	3000/4000/6500	1104/1200/1200	BLACK	4099854838460
FL24WTCBK	24	3000/4000/6500	2208/2400/2400	BLACK	4099854838422
FL24WTCMSBK	24	3000/4000/6500	2208/2400/2400	BLACK	4099854838507
FL12WTCWH	12	3000/4000/6500	1104/1200/1200	WHITE	4099854838255
FL12WTCMSWH	12	3000/4000/6500	1104/1200/1200	WHITE	4099854838446
FL24WTCWH	24	3000/4000/6500	2208/2400/2400	WHITE	4099854838408
FL24WTCMSWH	24	3000/4000/6500	2208/2400/2400	WHITE	4099854838484

*Denotes of Model Number: FL:Floodlight; 12W:12W; 24W:2X12W; TC:Tri-colour; MS:Motion Sensor; BK:Black; WH:White

¹ The Rated Lumen outputs are specified @4000K/6500K. Lumen outputs @3000K is 8% less than the above rated lumen outputs respectively.


HelioLux 4-CCT Solar Floodlight



FEATURES AND BENEFITS

- 4-colour selectable: 3000K/4000K/5000K/6500K
- IP65 weatherproof, corrosion resistant die-cast aluminum body with tempered glass diffuser
- PIR and dusk to dawn control sensor, detection range 110°, up to Ø6m, Installation height max 2.5m
- Three modes selectable by remote control
- Angled bracket design allows aiming flexibility
- Lithium-ion battery offers longer lifespan and faster charging

DIMENSIONS

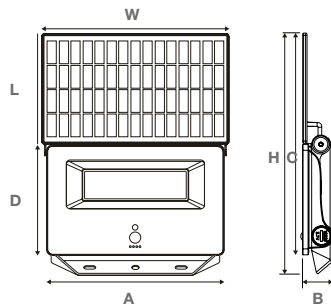

Model	L (mm)	W (mm)	H (mm)	A (mm)	B (mm)	C (mm)	D (mm)
SFL1800	120	204	264	193	33	241	120
SFL3000	179	322	386	290	46	352	173
SFL5000	179	322	386	290	46	352	173

ORDERING CODES

Model Number* (Order Code)	Wattage (W)	Lumen ¹ (LM)	CCT (K)	Product Code (EAN10 Code)
SFL1800	15W	1800	3000/4000/5000/6500	4099854688096
SFL3000	19W	3000	3000/4000/5000/6500	4099854688102
SFL5000	32W	5000	3000/4000/5000/6500	4099854688126

*Denotes of Model Number: SFL: Solar Floodlight; 1800 / 3000 / 5000: lumen output 1800 / 3000 / 5000lm

¹ The Rated Lumen outputs are specified @4000K/5000K/6500K. Lumen outputs @3000K is 8% less than the above rated lumen outputs respectively.


Value Plus Low Profile Floodlight



FEATURES AND BENEFITS

- Tri-colour and multi-watt selectable for versatile applications
- High efficiency up to 150 lm/W for energy saving
- Integrated sensor technology combines elegant aesthetics with intelligent illumination
- Flicker-free technology reduces eye strain and enhances visual comfort
- Robust die-cast aluminium with powder-coated finish withstands
- 800-hour salt spray testing for superior corrosion resistance
- Screwless front panel frame with IK08 rating ensures seamless, clean aesthetics
- Black / white finishes with / without sensor to suit diverse needs

DIMENSIONS

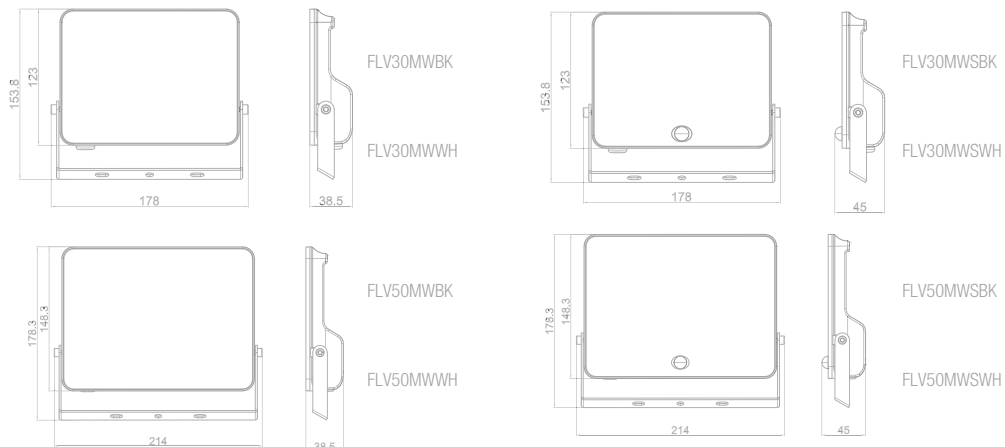

ORDERING CODES

Model Number* (Order Code)	Multi-Wattage(W)	Lumen@4000K ¹ (LM)	CCT	Input Current	Inrush Current	Product Code (EAN10 Code)
FLV30MWBK	30/20/10	4500/3000/1500	3K/4K/5K	151mA	15.9A@230VAC 348μS	4099854911033
FLV30MWWH	30/20/10	4500/3000/1500	3K/4K/5K	151mA	15.9A@230VAC 348μS	4099854911118
FLV30MWSBK	30/20/10	4500/3000/1500	3K/4K/5K	155mA	15.9A@230VAC 348μS	4099854911057
FLV30MWSWH**	30/20/10	4500/3000/1500	3K/4K/5K	155mA	15.9A@230VAC 348μS	4099854911156
FLV50MWBK	50/40/30	7500/6000/4500	3K/4K/5K	251mA	18.9A@230VAC 261μS	4099854911217
FLV50MWWH	50/40/30	7500/6000/4500	3K/4K/5K	251mA	18.9A@230VAC 261μS	4099854911354
FLV50MWSBK	50/40/30	7500/6000/4500	3K/4K/5K	255mA	18.9A@230VAC 261μS	4099854911255
FLV50MWSWH**	50/40/30	7500/6000/4500	3K/4K/5K	255mA	18.9A@230VAC 261μS	4099854911378

*Denotes of Model Number: FLV:Value Plus Floodlight;30/50MW: MultiWatt Up To 30/50W; S:Sensor; WH:White; BK:Black

** Made to order

¹ Lumen outputs @3000K is 8% less than the above rated lumen outputs respectively.


Value Plus Tri-Colour Floodlight



FEATURES AND BENEFITS

- Tri-colour and multi-watt selectable for versatile applications
- High efficiency up to 150 lm/W for optimal performance
- 100-277V wide input voltage tolerates the voltage fluctuation or unstable power net supply
- Flicker-free technology reduces eye strain and enhances visual comfort
- Robust die-cast aluminium with powder-coated finish withstands 800-hour salt spray testing for superior corrosion resistance
- Screwless front panel frame with IK08 rating ensures seamless, clean aesthetics

DIMENSIONS

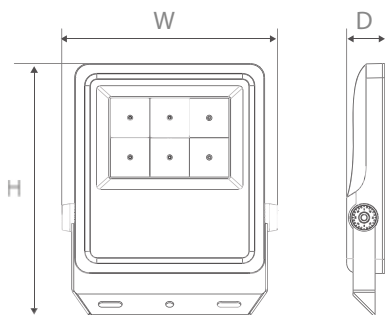

Model	W (mm)	H (mm)	D (mm)
FLV100MWTC	275	320	50
FLV150MWTC	322	378	52
FLV200MWTC	355	420	52

ORDERING CODES

Model Number* (Order Code)	Multi-Wattage (W)	Lumen@4000K/6500K ¹ (LM)	CCT (K)	Input Current (mA)	Inrush Current @230Vac	Product Code (EAN10 Code)
FLV100MWTC	100/75/50	15000/11250/7500	3K/4K/6.5K	460	80A 200µS	4099854741630
FLV150MWTC	150/100/75	22500/15000/11250	3K/4K/6.5K	680	80A 250µS	4099854741647
FLV200MWTC	200/150/100	30000/22500/15000	3K/4K/6.5K	915	90A 300µS	4099854741678

*Denotes of Product Code: FLV:Value Plus Floodlight; 100/150/200MW: MultiWatt Up To 100/150/200W; TC:Tri-Colour

¹ The Rated Lumen outputs are specified @4000K/6500K. Lumen outputs @3000K is 8% less than the above rated lumen outputs respectively.


Value Plus RGBA Floodlight



FEATURES AND BENEFITS

- 4 colour selectable: Red, Green, Blue, Amber (2200K) / multi watt selectable
- 100-277V wide input voltage tolerates the voltage fluctuation or unstable power net supply
- Flicker-free technology reduces eye strain and enhances visual comfort
- Robust die-cast aluminium with powder-coated finish withstands
- 800-hour salt spray testing for superior corrosion resistance
- Screwless front panel frame with IK08 rating ensures seamless, clean aesthetics

DIMENSIONS

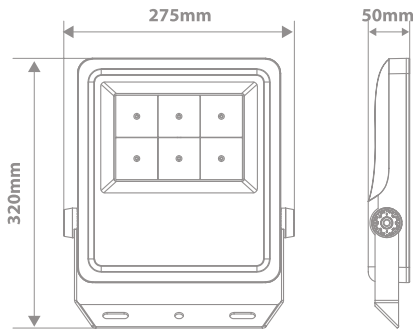

ORDERING CODES

Model Number* (Order Code)	Multi Wattage (W)	Lumen@2200K (lm)	CCT (K)	Input Current (mA)	Inrush Current	Product Code (EAN10 Code)
FLRGBA100MW	100/75/50	12000/9000/6000	RED/ GREEN/ BLUE/ 2200K	460	80A 200µS @230VAC	4099854992452

*Denotes of Model Number: FL:Floodlight; RGBA: Red/Green/Blue/Amber; 100MW: MultiWatt Up To 100W;


Value Plus RGBW Floodlight



FEATURES AND BENEFITS

- 4 colour Red, Green, Blue, 4000K / multi-watt selectable
- High efficiency up to 150 lm/W for optimal performance
- 100-277V wide input voltage tolerates the voltage fluctuation or unstable power net supply
- Flicker-free technology reduces eye strain and enhances visual comfort
- Robust die-cast aluminium with powder-coated finish withstands 800-hour salt spray testing for superior corrosion resistance
- Screwless front panel frame with IK08 rating ensures seamless, clean aesthetics

DIMENSIONS

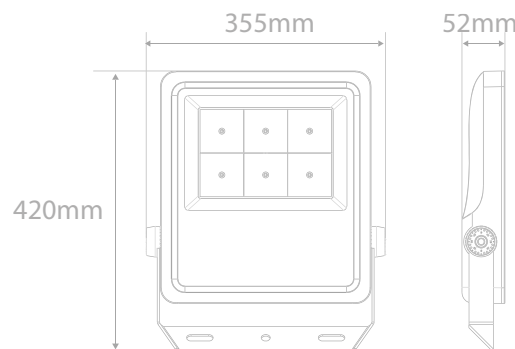

ORDERING CODES

Model Number* (Order Code)	Multi-Wattage (W)	Lumen@4000K ¹ (LM)	CCT	Input Current (mA)	Inrush Current	Product Code (EAN10 Code)
FLRGBW200MW	200/ 150/ 100	30000/ 22500/ 15000	RED/ GREEN/ BLUE/ 4000K	915	90A 300μS @230VAC	4099854852534

*Denotes of Product Code: FL:Floodlight;RGBW:Red/Green/Blue/4K Selectable;100/200MW:MultiWatt Up To 100/200W
¹ Lumen outputs @Red/Green/Blue is 8% less than the above rated lumen outputs respectively.


Areaster Area Light



FEATURES AND BENEFITS

- VEET (Sch35) approved
- Multi-watt selectable: 75/50/25W, 150/100/75W, 200/150/100W, 300/200/150W
- Type III asymmetric light distribution provides wide forward lighting, ideal for car parks and perimeters with minimal light spill
- Optional photocell sensor for automated control
- Mounting accessories available: slip fitter and U-bracket
- Heavy-duty aluminium die-cast housing
- Elegant and functional design
- DALI2.0 optional

DIMENSIONS

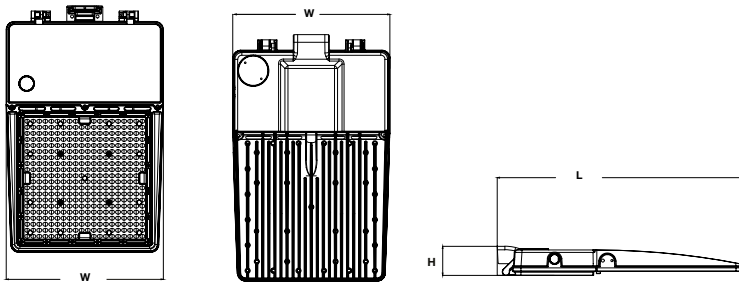

Model	Length L (mm)	Width W (mm)	Height H (mm)
LAL75MW	428	247	55
LAL150MW	428	247	55
LAL200MW	458	268	55
LAL300MW	538	325	55

ORDERING CODES

Model Number* (Order Code)	Multi-Wattage (W)	Lumen (LM)	CCT** (K)	Input Current (mA)	Inrush Current	Product Code (EAN10 Code)
LAL75MW3K	75/50/25W	11250/7500/3750	3000	450	80A @200µS	4099854944840
LAL75MW	75/50/25W	11250/7500/3750	5000	450	80A @200µS	4099854523885
LAL150MW	150/100/75W	22500/15000/11250	5000	680	80A @250µS	4099854523892
LAL200MW	200/150/100W	30000/22500/15000	5000	900	90A @300µS	4099854523908
LAL300MW	300/200/150W	45000/30000/22500	5000	1400	100A @500µS	4099854523915

Denotes of Model Number: L-LEDVANCE; AL-Area Light; 75/150/200/300MW-Multi Watt Up To 75/150/200/300W

**3000K and 4000K are made to order, except for the models listed above

Areaster Area Light Accessories



Daylight Sensor



Slip Fitter



U Bracket Kits

Model Number* (Order Code)	Description	Product Code (EAN10 Code)
LALDS	PHOTOCELL DAYLIGHT SENSOR	4099854581540
LALSF	SLIP FITTER BLACK (FIT Ø60MM POLE)	4099854581502
LAL150UB	U BRACKET KITS UPTO 150W BK (FOR LAL75MW & LAL150MW)	4099854581519
LAL200UB	U BRACKET KITS 200W BK (FOR LAL200MW)	4099854581526
LAL300UB	U BRACKET KITS 300W BK (FOR LAL300MW)	4099854581533

* All Areaster area light must be ordered with a u bracket or slip fitter mounting option


MaxPro Floodlight



FEATURES AND BENEFITS

- Multi-watt selectable with high efficiency up to 160 lm/W
- Asymmetric light distribution
- Broad voltage range 120V-277V, 6000V surge protection
- Flicker Free driver, DALI2.0 Optional
- IP66 & IK08 protection, corrosion-resistant design ideal for industrial areas
- Perfect thermal management for long-term performance
- Various mounting options

DIMENSIONS

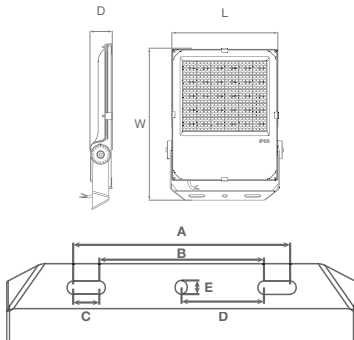

Model	L (mm)	W (mm)	H (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
LFLMP100MW	361	328	55	200	120	40	60	14
LFLMP200MW	362	468	58	200	120	40	60	14
LFLMP300MW	423	542	71	240	160	40	80	19
LFLMP600MW	521	656	83	320	240	40	105	19

ORDERING CODES

Model Number* (Order Code)	Multi-Wattage (W)	Lumen (LM)	CCT (K)	Input Current (mA)	Inrush Current	Product Code (EAN10 Code)
LFLMP100MW	100/75/50	16000/12000/8000	5000	430MA	90A@220V AC 160μS	4099854526510
LFLMP200MW	200/150/100	32000/24000/16000	5000	877MA	100A@220V AC 316μS	4099854526527
LFLMP300MW	300/200/150	48000/32000/24000	5000	1310MA	120A@220V AC 316μS	4099854526558
LFLMP600MW	600/500/400	96000/80000/64000	5000	2580MA	120A@220V AC 316μS	4099854526589

*Denotes of Model Number: L-Ledvance; FL-Floodlight; MP-MaxPro; MW-Multi Watt

Sportsliter Professional Floodlight



1200W





600W



FEATURES AND BENEFITS

- Precision reflector optical design to control spill light ideally
- Asymmetric light distribution with wide beam or narrow beam options
- High lumen efficacy up to 160lm/W
- All exposed cabling is protected by stainless steel conduit
- Wide input voltage: 180–528VAC
- All-in-one dimming remote driver: DALI-2, D4i Certified, DMX-RDM, 0-10V, PWM, Resistor and 3-Timer-Modes
- Comprehensive Protection: OPP, IOVP, IUVP, OVP, SCP and OTP
- Adjustable Output Current (AOC) with NFC
- Glare shields and bird spikes available as optional accessories

DIMENSIONS

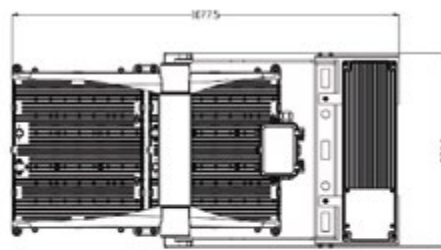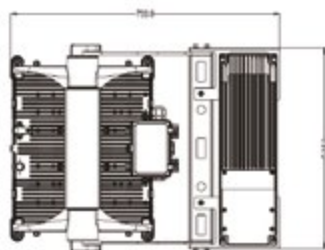

ORDERING CODES

Model Number* (Order Code)	Wattage (W)	Lumen (LM)	CCT (K)	Asymmetrical Distributions	Product Code (EAN10 Code)
SFL600WA60**	600	96000	4000	WIDE BEAM	4099854741555
SFL600WA50**	600	90000	4000	NARROW BEAM	4099854741548
SFL1200WA60	1200	192000	4000	WIDE BEAM	4099854741623
SFL1200WA50**	1200	180000	4000	NARROW BEAM	4099854741609

Denotes of Model Number: SFL:Sportsliter Floodlight; 600/1200W:600/1200W 4K; A60:Asymmetric Wide Beam; A50:Asymmetric Narrow Beam

**Made to order, MOQ applies.



LEDVANCE

FLOODLIGHTS

LEDVANCE | POWER THROUGH LIGHT