

LEDVANCE.COM.AU



LEDVANCE

LEDVANCE Pty Ltd
Unit 3, 83 Derby St
Silverwater NSW 2128
Customer Service
Phone: 1300 467 726
E-mail: sales.au@ledvance.com

LUXEWAY SOLAR BOLLARD



VERSION 30/05/25

LUXEWAY SOLAR BOLLARD

The LuxeWay Solar Bollard comes in two heights—768mm and 1053mm—ideal for pathways, parks, and public spaces. It features a flicker-free design with an integrated 9V solar panel, PWM dimming, and a built-in PIR sensor for motion-activated lighting. A remote control allows easy adjustments. Rated IP65 for water and dust resistance and IK10 for impact protection, the LuxeWay Solar Bollard ensures durability and reliability in tough outdoor environments.



FEATURES AND BENEFITS

- Tri colour selectable: 3000/4000/5000K
- IP65 and IK10 rated for dust, water, and impact protection
- Integrated 9V solar panel, no wiring required
- Features PWM dimming for smooth light control
- Includes PIR sensor with motion-activated full brightness and energy-saving dimming, plus remote control for easy operation
- Provides flicker-free lighting for comfortable illumination

AREAS OF APPLICATION

- Pathways
- Parks
- Public spaces
- Gardens
- Residential outdoor spaces



AVAILABLE SIZES



LSB4W2F
4W
Diameter Ø264mm x H 768mm



LSB4W4F
4W
Diameter Ø264mm x H 1053mm

SPECIFICATIONS


lm/W	125 lm/W
CCT	3000/4000/5000K
IP Rating	IP65
IK Rating	IK10
Dimmable	PWM dimming, DALI2.0 (Optional)
Sensor	PIR sensor, Remote control (Included)
Housing Material	Aluminium
Beam Angle	360°
CRI	>80

SDCM	<6
Electrical Classification	Class III
Connection Type	Integrated solar panel, no wiring required
Flicker Rate	Flicker Free
Installation Type	Rag-bolt assembly accessory included
Operating Temperature	0°C to 50°C
Lifetime	2000 Cycles @ 80%
Warranty	5 years

PHOTOMETRICS

(Example of)

DIMENSIONS

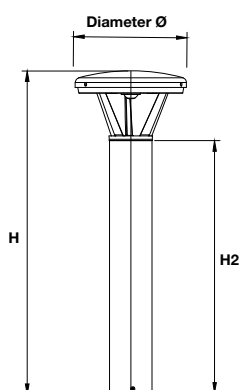

Model	Diameter (mm)	H (mm)	H2 (mm)
LSB4W2F	Ø264	768	600
LSB4W4F	Ø264	1053	885

ORDERING CODES - LUXEWAY SOLAR BOLLARD

Model number* (Order Code)	EAN10	Description	W	lm ¹	K		lm/W		
-------------------------------	-------	-------------	---	-----------------	---	---	------	---	---

LUXEWAY SOLAR BOLLARD

LSB4W2F	4099854526664	LUXEWAY SOLAR BOLLARD TC 4W 500LM IP66 IK10 3K/4K/5K H768*D264MM BLACK	4	500	3000/ 4000/ 5000	360	125	264	768
LSB4W4F	4099854526671	LUXEWAY SOLAR BOLLARD TC 4W 500LM IP66 IK10 3K/4K/5K H1053*D264MM BLACK	4	500	3000/ 4000/ 5000	360	125	264	1053

*Denotes of Model Number: L-LEDVANCE; BL-Bollard; 4W-4 Watt; 2F-768mm; 4F-1053mm

1 The Rated Lumen outputs are specified @4000K/5000K. Lumen outputs @3000K is 8% less than the above rated lumen outputs respectively.