




LEDVANCE Pty Ltd
Unit 3, 83 Derby St
Silverwater NSW 2128
Customer Service
Phone: 1300 467 726
E-mail: sales.au@ledvance.com

PRO IP65 WIDE BODY BATTEN



PRO IP65 WIDE BODY BATTEN

PRO IP65 Wide Body Batten – a robust, high-performance lighting solution with a 2-piece construction module for easier installation and maintenance. Delivers ultra-efficient 140lm/W, maximising brightness while minimising energy use. Available in multi-watt selectable sizes: 2FT (20/17/14/10W), 4FT (40/35/30/20W), and 5FT (55/45/35/25W) with 5-colour temperature options (3000K–6500K). Featuring a 115mm wide body, IP65 and IK08 rating, it's built for harsh environments. Choose from standard, sensor, emergency, or sensor/emergency versions. Ideal for industrial, commercial, and outdoor applications.

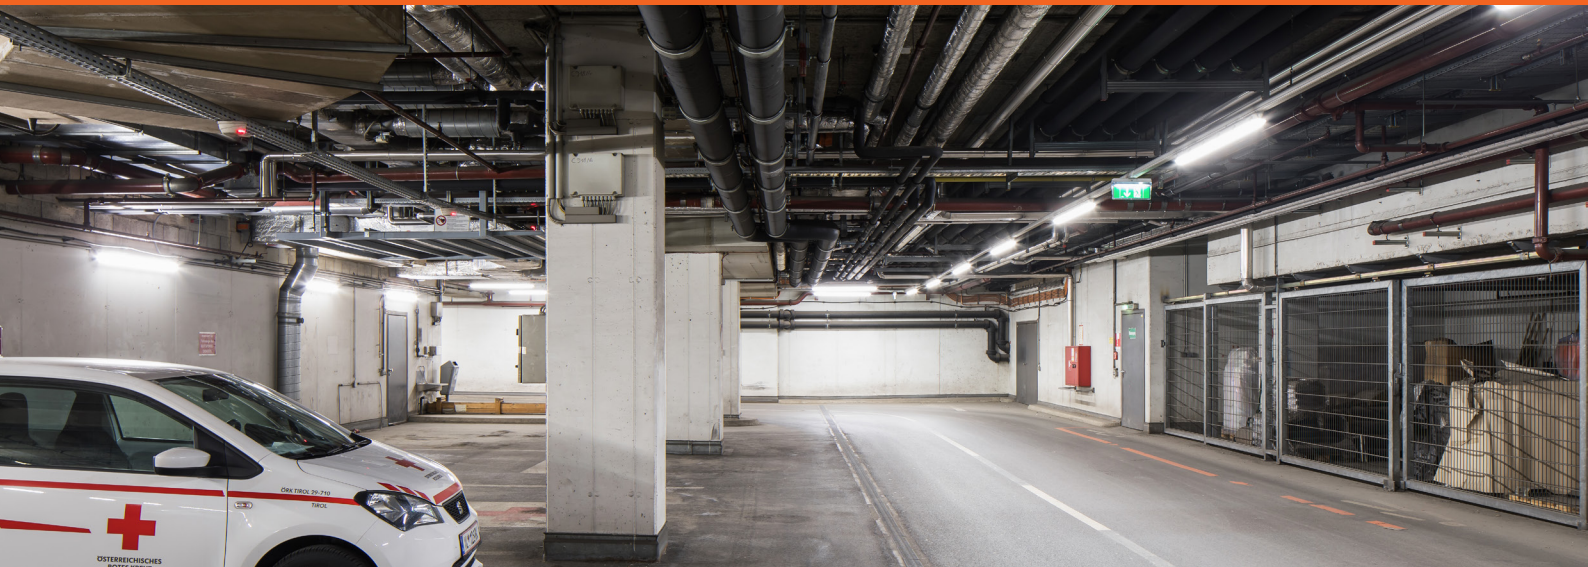

FEATURES AND BENEFITS

- Multi-watt selectable: 2FT: 20/17/14/10W, 4FT: 40/35/30/20W, 5FT: 60/50/40/30W
- 5-colour selectable: 3000/4000/5000/5700/6500K
- Delivers outstanding efficiency of up to 140lm/W, ensuring powerful light output with reduced energy costs
- 115mm Wide body fits retrofits perfectly and hides old ceiling marks
- Two-piece construction with encapsulated module for quick and hassle-free installation
- Flicker free for comfortable, stable lighting
- Available with sensor, emergency, or combined sensor/emergency options
- Optional DALI 2.0 for advanced digital control
- Removable 6mm PA16 terminal block allows fast, easy wiring and secure connections

AREAS OF APPLICATION

- Car parks
- Public areas
- Warehouses
- Railways
- Commercial spaces



AVAILABLE SIZES



2FT
20/17/14/10W
L 655mm x W 115mm x H 85mm



4FT
40/35/30/20W
L 1255mm x W 115mm x H 85mm



5FT
60/50/40/30W
L 1555mm x W 115mm x H 85mm


SPECIFICATIONS

lm/W	140 lm/W	Connection Type	PA16 Terminal
CCT	3000/4000/5000/ 5700/6500K	Voltage	220-240V
IP Rating	IP65	Input Current	40W: 0.23A 20W: 0.095A
IK Rating	IK08	PF	>0.9
Dimmable	DALI2.0 optional	Frequency	50/60Hz
Sensor	Microwave dimming sensor	Surge Protection	1KV
Housing Material	Polycarbonate Stainless Steel clips and screws	Flicker Rate	Flicker Free
Beam Angle	120°	Mounting Type	Surface mounting
CRI	>80	Operating Temperature	-30°C to 50°C
SDCM	<6	Lifetime	50000 hours
Electrical Classification	Class I	Warranty	5 years

PHOTOMETRICS

(Example of)

DIMENSIONS



Model	L (mm)	W (mm)	H (mm)
2FT	655	115	85
4FT	1255	115	85
5FT	1555	115	85

ORDERING CODES - PRO IP65 WIDE BODY BATTEN

Model number* (Order Code)	EAN10	Description	W	lm ¹	K					
STANDARD										
LWPP2F20MW	4099854611223	PRO WEATHERPROOF BATTEN 5CCT 2FT MW 20/17/14/10W UPTO 140LM/W 2800LM IP65 IK08 FLICKERFREE 3K/4K/5K/5.7K/6.5K L655*W115*H85MM	20/ 17/ 14/ 10	2800/ 2380/ 1960/ 1400	3000/ 4000/ 5000/ 5700/ 6500	120	140	655	115	85
LWPP4F40MW	4099854611148	PRO WEATHERPROOF BATTEN 5CCT 4FT MW 40/35/30/20W UPTO 140LM/W 5600LM IP65 IK08 FLICKERFREE 3K/4K/5K/5.7K/6.5K L1255*W115*H85MM	40/ 35/ 30/ 20	5600/ 4900/ 4200/ 2800	3000/ 4000/ 5000/ 5700/ 6500	120	140	1255	115	85
LWPP5F60MW#	4099854612169	PRO WEATHERPROOF BATTEN 5CCT 5FT MW 60/50/40/30W UPTO 140LM/W 7200LM IP65 IK08 FLICKERFREE 3K/4K/5K/5.7K/6.5K L1555*W115*H85MM	60/ 50/ 40/ 30	8400/ 7000/ 5600/ 4200	3000/ 4000/ 5000/ 5700/ 6500	120	140	1555	115	85
EMERGENCY										
LWPP2F20MWEM	4099854611216	PRO WEATHERPROOF EMG BATTEN 5CCT 2FT MW 20/17/14/10W UPTO 140LM/W 2800LM IP65 IK08 FLICKERFREE 3K/4K/5K/5.7K/6.5K L655*W115*H85MM	20/ 17/ 14/ 10	2800/ 2380/ 1960/ 1400	3000/ 4000/ 5000/ 5700/ 6500	120	140	655	115	85
LWPP4F40MWEM	4099854611162	PRO WEATHERPROOF EMG BATTEN 5CCT 4FT MW 40/35/30/20W UPTO 140LM/W 5600LM IP65 IK08 FLICKERFREE 3K/4K/5K/5.7K/6.5K L1255*W115*H85MM	40/ 35/ 30/ 20	5600/ 4900/ 4200/ 2800	3000/ 4000/ 5000/ 5700/ 6500	120	140	1255	115	85
LWPP5F60MWEM#	4099854612183	PRO WEATHERPROOF EMG BATTEN 5CCT 5FT MW 60/50/40/30W UPTO 140LM/W 7200LM IP65 IK08 FLICKERFREE 3K/4K/5K/5.7K/6.5K L1555*W115*H85MM	60/ 50/ 40/ 30	8400/ 7000/ 5600/ 4200	3000/ 4000/ 5000/ 5700/ 6500	120	140	1555	115	85
MICROWAVE DIMMING SENSOR										
LWPP2F20MWS	4099854611285	PRO WEATHERPROOF SENSOR BATTEN 5CCT 2FT MW 20/17/14/10W UPTO 140LM/W 2800LM IP65 IK08 FLICKERFREE 3K/4K/5K/5.7K/6.5K L655*W115*H85MM	20/ 17/ 14/ 10	2800/ 2380/ 1960/ 1400	3000/ 4000/ 5000/ 5700/ 6500	120	140	655	115	85
LWPP4F40MWS	4099854611193	PRO WEATHERPROOF SENSOR BATTEN 5CCT 4FT MW 40/35/30/20W UPTO 140LM/W 5600LM IP65 IK08 FLICKERFREE 3K/4K/5K/5.7K/6.5K L1255*W115*H85MM	40/ 35/ 30/ 20	5600/ 4900/ 4200/ 2800	3000/ 4000/ 5000/ 5700/ 6500	120	140	1255	115	85
LWPP5F60MWS#	4099854612237	PRO WEATHERPROOF SENSOR BATTEN 5CCT 5FT MW 60/50/40/30W UPTO 140LM/W 7200LM IP65 IK08 FLICKERFREE 3K/4K/5K/5.7K/6.5K L1555*W115*H85MM	60/ 50/ 40/ 30	8400/ 7000/ 5600/ 4200	3000/ 4000/ 5000/ 5700/ 6500	120	140	1555	115	85

*Denotes of Model Number: L-LEDVANCE; WP-WeatherProof; P-PRO; 2F-2FT; 4F-4FT; 5F-5FT; 20/40/60MW-Multi Watt up to 20/40/60W; EM-Emergency; S-Microwave Dim Sensor

1 The Rated Lumen outputs are specified @4000K/5000K/5700K/6500K. Lumen outputs @3000K is 8% less than the above rated lumen outputs respectively.

ORDERING CODES - PRO IP65 WIDE BODY BATTEN

Model number* (Order Code)	EAN10	Description	W	lm ¹	K					
EMERGENCY WITH MICROWAVE DIMMING SENSOR  										
LWPP2F20MWEMS	4099854611278	PRO WEATHERPROOF EMG SENSOR BATTEN 5CCT 2FT MW 20/17/14/10W UPTO 140LM/W 2800LM IP65 IK08 FLICKERFREE 3K/4K/5K/5.7K/6.5K L655*W115*H85MM	20/ 17/ 14/ 10	2800/ 2380/ 1960/ 1400	3000/ 4000/ 5000/ 5700/ 6500	120	140	655	115	85
LWPP4F40MWEMS	4099854611209	PRO WEATHERPROOF EMG SENSOR BATTEN 5CCT 4FT MW 40/35/30/20W UPTO 140LM/W 5600LM IP65 IK08 FLICKERFREE 3K/4K/5K/5.7K/6.5K L1255*W115*H85MM	40/ 35/ 30/ 20	5600/ 4900/ 4200/ 2800	3000/ 4000/ 5000/ 5700/ 6500	120	140	1255	115	85
LWPP5F60MWEMS#	4099854612213	PRO WEATHERPROOF EMG SENSOR BATTEN 5CCT 5FT MW 60/50/40/30W UPTO 140LM/W 7200LM IP65 IK08 FLICKERFREE 3K/4K/5K/5.7K/6.5K L1555*W115*H85MM	60/ 50/ 40/ 30	8400/ 7000/ 5600/ 4200	3000/ 4000/ 5000/ 5700/ 6500	120	140	1555	115	85
DALI2.0 										
LWPP2F20MWDALI		PRO WEATHERPROOF DALI BATTEN 5CCT 2FT MW 20/17/14/10W UPTO 140LM/W 2800LM IP65 IK08 FLICKERFREE 3K/4K/5K/5.7K/6.5K L655*W115*H85MM	20/ 17/ 14/ 10	2800/ 2380/ 1960/ 1400	3000/ 4000/ 5000/ 5700/ 6500	120	140	655	115	85
LWPP4F40MWDALI		PRO WEATHERPROOF DALI BATTEN 5CCT 4FT MW 40/35/30/20W UPTO 140LM/W 5600LM IP65 IK08 FLICKERFREE 3K/4K/5K/5.7K/6.5K L1255*W115*H85MM	40/ 35/ 30/ 20	5600/ 4900/ 4200/ 2800	3000/ 4000/ 5000/ 5700/ 6500	120	140	1255	115	85
LWPP5F60MWDALI#		PRO WEATHERPROOF DALI BATTEN 5CCT 5FT MW 60/50/40/30W UPTO 140LM/W 7200LM IP65 IK08 FLICKERFREE 3K/4K/5K/5.7K/6.5K L1555*W115*H85MM	60/ 50/ 40/ 30	8400/ 7000/ 5600/ 4200	3000/ 4000/ 5000/ 5700/ 6500	120	140	1555	115	85

*Denotes of Model Number: L-LEDVANCE; WP-WeatherProof; P-PRO; 2F-2FT; 4F-4FT; 5F-5FT 20/40/60MW-Multi Watt up to 20/40/60W; EM-Emergency; S-Micro-wave Dim Sensor; DALI-DALI2.0

Made to order. Specifications subject to change without notice for product improvements.

¹ The Rated Lumen outputs are specified @4000K/5000K/5700K/6500K. Lumen outputs @3000K is 8% less than the above rated lumen outputs respectively.