




LEDVANCE Pty Ltd
Unit 3, 83 Derby St
Silverwater NSW 2128
Customer Service
Phone: 1300 467 726
E-mail: sales.au@ledvance.com

PARKSTER POST TOP



PARKSTER POST TOP

The Parkster Post Top delivers durability, efficiency, and modern style for outdoor lighting. Built with a corrosion-resistant, powder-coated die-cast aluminium body, it ensures long-lasting performance in various environments. With IP65 and IK08 ratings, the Parkster Post Top is both weather-resistant and impact-resistant. This fixture features selectable wattages (100W/75W/50W/30W) and tri colour temperature options (3000K/4000K/5000K), making it ideal for illuminating parks, pathways, streets, and commercial areas. Designed to fit 73–78mm poles, it offers convenience for easy installation. Thanks to low-maintenance design, it comes backed by a 5-year warranty for peace of mind.

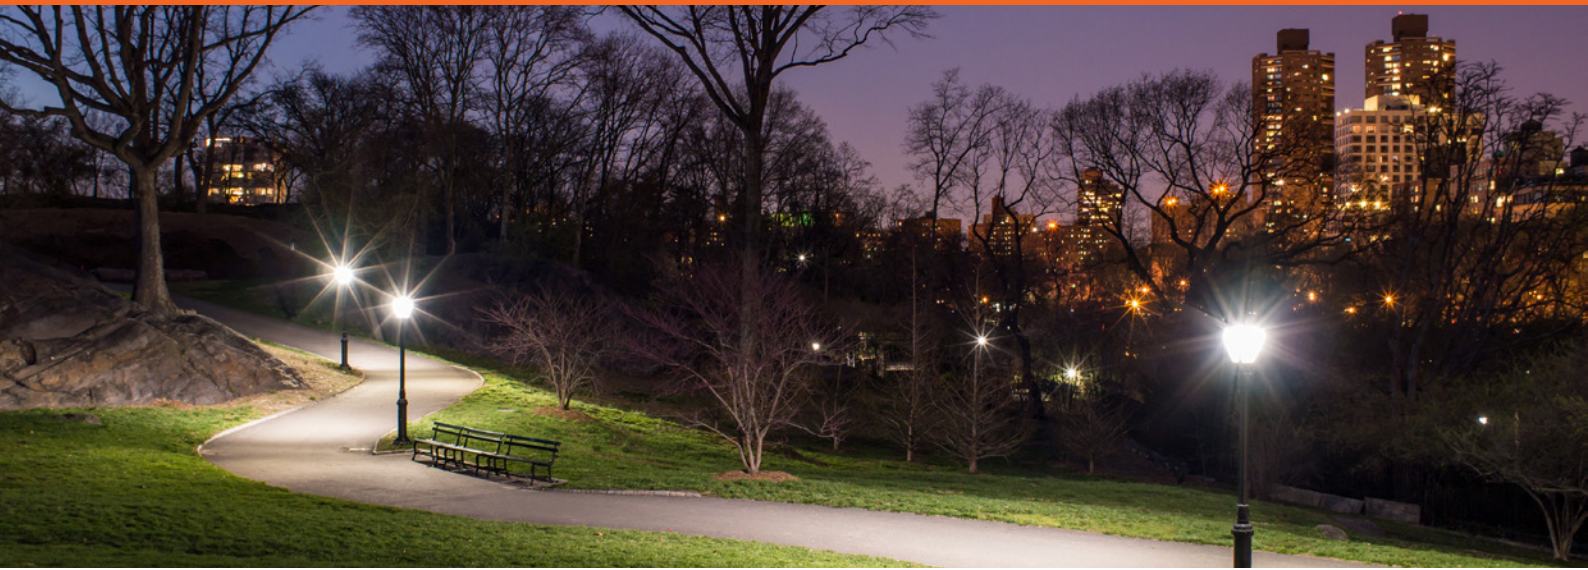

FEATURES AND BENEFITS

- Multi-Watt selectable: 100W/75W/50W/30W
- Tri Colour selectable: 3000K/4000K/5000K
- Daylight Sensor optional
- DALI 2.0 optional
- Durability & weather resistance – corrosion-resistant materials for long-lasting performance
- Elegant & versatile design – suitable for various outdoor settings enhances outdoor spaces – adds functionality & aesthetic appeal to parks, streets, gardens & commercial areas
- Easy installation & maintenance – designed for quick setup & low upkeep
- Reliability & performance – stylish options from traditional to modern to complement any exterior décor

AREAS OF APPLICATION

- Public parks
- Parking lots
- Walkways
- Outdoor seating areas
- Garden spaces



AVAILABLE SIZES




LPT100MWTC
100/75/50/30W
Diameter Ø420mm x H 551mm
Flex fit for 73-78mm pole

SPECIFICATIONS


lm/W	160 lm/W	Connection Type	3m Flex
CCT	3000/4000/5000K	Voltage	100-277V AC
IP Rating	IP65	Input Current	370mA Max
IK Rating	IK08	PF	0.9
Dimmable	DALI2.0 optional	Frequency	50/60Hz
Sensor	Daylight Sensor optional	Surge Protection	L-N>4KV; L,N-E>6KV
Housing Material	Die-cast Aluminium	Salt Spray	Yes
Diffuser	Tempered Glass	Flicker Rate	Flicker Free
Beam Angle	120°	Mounting Type	Flex fit for 73-78mm pole
CRI	70	Operating Temperature	-30°C to +50°C
SDCM	≤ 5	Lifetime	50,000 hours
Electrical Classification	Class I	Warranty	5 years

PHOTOMETRICS

(Example of LPT100MWTC)

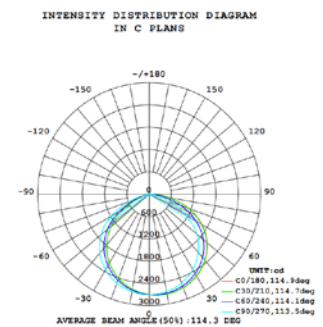

DIMENSIONS

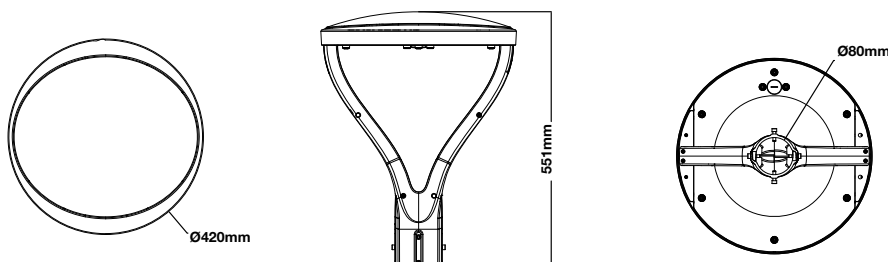

LPT100MWTC
100/75/50/30W
Diameter Ø420mm x H 551mm
Flex fit for 73-78mm pole

ORDERING CODES - PARKSTER POST TOP

Model number* (Order Code)	EAN10	Description	W	lm ¹	K		lm/W				
-------------------------------	-------	-------------	---	-----------------	---	---	------	---	---	---	---

PARKSTER POST TOP

LPT100MWTC	4099854523847	TRICOLOUR POST TOP MW 100/75//50/30W UPTO 160LM/W 16000LM	100/ 75/ 50/ 30	16000/ 12000/ 8000/ 4800	3000/ 4000/ 5000	120	160	✕	420	551	6600
------------	---------------	---	--------------------------	-----------------------------------	------------------------	-----	-----	---	-----	-----	------

*Denotes of Model Number: L-LEDVANCE; PT-Post Top; 100MW-Multi Watt up to 100W; TC-Tri Colour

1 The Rated Lumen outputs are specified @4000K/5000K. Lumen outputs @3000K is 8% less than the above rated lumen outputs respectively.