

LEDVANCE.COM.AU



**LEDVANCE**

LEDVANCE Pty Ltd  
Unit 3, 83 Derby St  
Silverwater NSW 2128  
Customer Service  
Phone: 1300 467 726  
E-mail: [sales.au@ledvance.com](mailto:sales.au@ledvance.com)

# WALLPACK WALL LIGHT



VERSION 05/08/25

# WALLPACK WALL LIGHT

The WallPack Wall Light offers tri-colour and multi-watt options for precise control over colour temperature and brightness. With high efficacy up to 140 lm/W, it delivers powerful, efficient illumination. Built with a die-cast aluminium body and glass lens, it ensures long-lasting durability. Its IP65 rating provides excellent resistance to dust and water, while IK08 impact protection adds toughness for demanding environments. An optional DALI dimming driver enhances control. The WallPack Wall Light is a compact, high-performance solution for reliable and versatile outdoor lighting.



## FEATURES AND BENEFITS

- Multi-Watt selectable: 120W/100W/80W/60W
- Tri Colour selectable: 3000K/4000K/5000K
- High efficacy up to 140 lm/W, ensuring optimal brightness while maximizing energy efficiency
- A die-cast aluminium body and tempered glass lens ensure durability and long-term performance
- IP65 and IK08 for outstanding water and impact resistance
- Optional DALI2.0 dimming available for advanced lighting control
- Multiple cable entries from rear and side make the installation easier

## AREAS OF APPLICATION

- Public spaces
- Construction areas
- Car parks
- Commercial buildings



## AVAILABLE SIZES




LWLWP120MW  
120/100/80/60W  
L 340mm x W 240mm x D 114mm

## SPECIFICATIONS


<b>lm/W</b>	140 lm/W	<b>Connection Type</b>	PA16 Terminal
<b>CCT</b>	3000K/4000K/5000K	<b>Voltage</b>	220 - 240V AC
<b>IP Rating</b>	IP65	<b>Input Current</b>	540mA
<b>IK Rating</b>	IK08	<b>Inrush Current</b>	230V 55A@500μs
<b>Dimmable</b>	0~10V/DALI2.0 (Optional)	<b>PF</b>	0.9
<b>Housing Material</b>	Die-cast Aluminium	<b>Frequency</b>	50/60Hz
<b>Diffuser</b>	Tempered Glass	<b>Flicker Rate</b>	Flicker Free
<b>Beam Angle</b>	100°	<b>Mounting Type</b>	Wall mounting
<b>CRI</b>	>80	<b>Operating Temperature</b>	-30°C to +50°C
<b>SDCM</b>	≤5	<b>Lifetime</b>	50000 hours
<b>Electrical Classification</b>	Class I	<b>Warranty</b>	5 years

## PHOTOMETRICS

(Example of LWLWP120MW @100W)

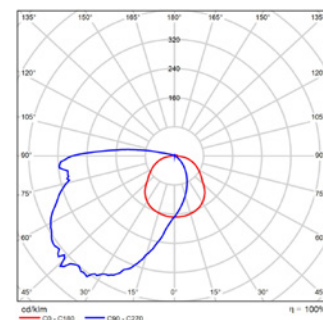

## DIMENSIONS

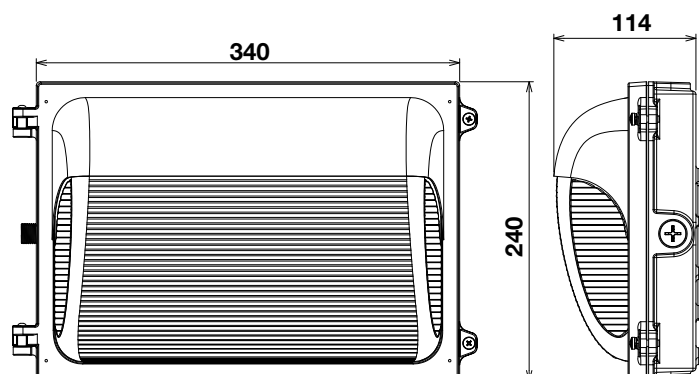

LWLWP120MW  
120/100/80/60W  
L 340mm x W 240mm x D 114mm

ORDERING CODES - WALLPACK WALL LIGHT

Model number* (Order Code)	EAN10	Description	W	lm <sup>1</sup>	K		lm/W			
-------------------------------	-------	-------------	---	-----------------	---	---	------	---	---	---

WALLPACK WALL LIGHT

LWLWP120MW	4099854523823	WALLPACK WALL LIGHT TC MW 120/100/80/60W UPTO 140LM/W 16800LM 3K/4K/5K IP65 IK08 L340*W240*H114MM BLACK	120/ 100/ 80/ 60	16800/ 14000/ 11200/ 8400	3000/ 4000/ 5000	100	140	340	240	114
------------	---------------	--	---------------------------	------------------------------------	------------------------	-----	-----	-----	-----	-----

\*Denotes of Model Number: L-LEDVANCE; WLWP-Wall Light WallPack; 120MW-Multi Watt Up to 120W

1 The Rated Lumen outputs are specified @4000K/5000K. Lumen outputs @3000K is 8% less than the above rated lumen outputs respectively.