



















HAL CL B 30 W 240 V B22D



EAN 4008321229182

	B22d
	93,0 mm
	35,0 mm
	–
W	30,00 W
lm	405 lm
	–
	–
	405 lm
	–
cd	–
K	2700 K
COLOUR	Warm White
R_a	100
t [h]	2000 h
	Ja
V	240 V
Hz	–

	50000 ¹⁾
	–
	0,00 s
	0,0 s
	–
Hg	0,0 mg
	D
	30 kWh/1000h

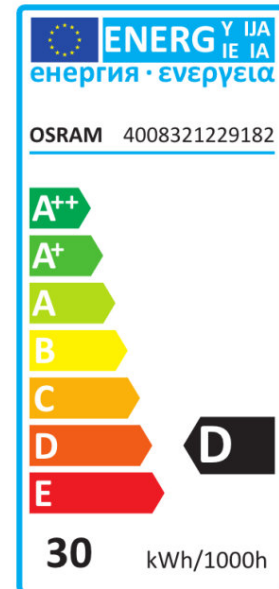

¹⁾ Bei 1 min ein / 3 min aus