

PRODUCT DATASHEET

HALOLUX T 25 W 230 V E14

HALOLUX T | Halogen lamps for refrigerators



AREAS OF APPLICATION

- Domestic refrigerators

PRODUCT BENEFITS

- Compact dimensions
- UV filter
- Contains no mercury

PRODUCT FEATURES

- Average life: 2,000 h
- 100 % dimmable



TECHNICAL DATA

Electrical data

Nominal wattage	25.00 W
Nominal voltage	230.0 V
Rated wattage	25.00 W
Power factor λ	1.00


Photometrical data

Rated color temperature	2700 K
Light color (designation)	Warm White
Rated luminous flux	260 lm
Nominal luminous flux	260 lm
Color rendering index Ra	100
Lumen main.fact.at end of nom.life time	0.80
Color temperature	2700 K
Luminous flux	260 lm
Color rendering index Ra	100

Light technical data

Starting time	0.0 s
Warm-up time (60 %)	0.00 s

Dimensions & weight



Diameter	26.0 mm
Overall length	80.0 mm
Light center length (LCL)	55.0 mm
Length	80.0 mm
Outer bulb	T26
Maximum diameter	26.0 mm

Lifespan

Nominal lamp life time	2000 h
Rated lamp life time	2000 h
Number of switching cycles	50000

Additional product data

Base (standard designation)	E14
Mercury content	0.0 mg
Mercury-free	Yes

Capabilities

Burning position	Any
Dimmable	Yes


Certificates & standards

Energy consumption	25 kWh/1000h
Energy efficiency class	D

Country-specific categorizations

ILCOS	HSGST/C/UB-25-230-E14-55
-------	--------------------------

Light Distribution

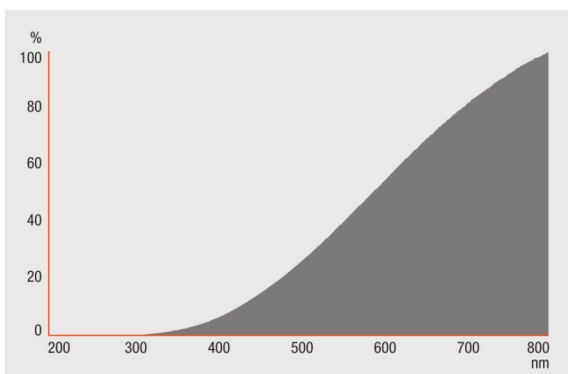

Spectral power distribution

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300500942	Folding carton box 1	111 mm x 42 mm x 42 mm	28.10 g	0.20 dm ³
4050300500959	Shipping carton box 15	225 mm x 125 mm x 140 mm	520.50 g	3.94 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.