

# PRODUCT FAMILY DATASHEET

## HALOLUX T

Halogen lamps for refrigerators



---

### AREAS OF APPLICATION

- Domestic refrigerators

---

### PRODUCT BENEFITS

- Compact dimensions
- UV filter
- Contains no mercury

---

### PRODUCT FEATURES

- Average life: 2,000 h
- 100 % dimmable





TECHNICAL DATA

Product description	Electrical data				Photometrical data						
	Nominal wattage	Nominal voltage	Rated wattage	Power factor $\lambda$	Color temperature	Light color (designation)	Nominal luminous flux	Color rendering index Ra	Lumen main.fact.at end of nom.life time	Color temperature	Luminous flux
HALOLUX T 25 W 230 V E14	25.00 W	230.0 V	25.00 W	1.00	2700 K	Warm White	260 lm	100	0.80	2700 K	260 lm
HALOLUX T 40 W 230 V E14	40.00 W	230.0 V	40.00 W	1.00	2700 K	Warm White	490 lm	100	0.80	2700 K	490 lm
HALOLUX T 60 W 230 V E14	60.00 W	230.0 V	60.00 W	1.00	2800 K	Warm White	820 lm	100	0.80	2800 K	820 lm

Product description	Color rendering index Ra	Light technical data		Dimensions & weight		Lifespan			Additional product data		
		Starting time	Warm-up time (60 %)	Diameter	Light center length (LCL)	Nominal lamp life time	Rated lamp life time	Number of switching cycles	Base (standard designation)	Mercury content	Mercury-free
HALOLUX T 25 W 230 V E14	100	0.0 s	0.00 s	26.0 mm	55.0 mm	2000 h	2000 h	50000	E14	0.0 mg	Yes
HALOLUX T 40 W 230 V E14	100	0.0 s	0.00 s	26.0 mm	55.0 mm	2000 h	2000 h	50000	E14	0.0 mg	Yes
HALOLUX T 60 W 230 V E14	100	0.0 s	0.00 s	26.0 mm	55.0 mm	2000 h	2000 h	50000	E14	0.0 mg	Yes

Product description	Capabilities		Certificates & standards	Country-specific categorizations
	Burning position	Dimmable	Energy consumption	ILCOS
HALOLUX T 25 W 230 V E14	Any	Yes	25 kWh/1000h	HSGST/C/UB-25-230-E14-55
HALOLUX T 40 W 230 V E14	Any	Yes	40 kWh/1000h	HSGST/C/UB-40-230-E14-55
HALOLUX T 60 W 230 V E14	Any	Yes	60 kWh/1000h	HSGST/C/UB-60-230-E14-55

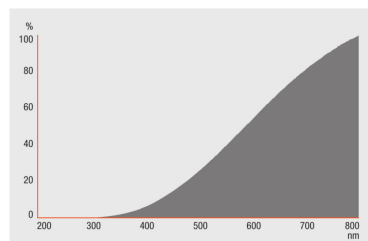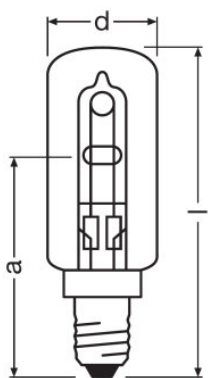

HALOLUX T 25 W 230 V E14, HALOLUX  
T 40 W 230 V E14, HALOLUX T 60 W  
230 V E14

HALOLUX T 25 W 230 V E14, HALOLUX  
T 40 W 230 V E14, HALOLUX T 60 W  
230 V E14

### APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300500959	Shipping carton box 15	225 mm x 125 mm x 140 mm	520.50 g	3.94 dm <sup>3</sup>
4050300363714	Shipping carton box 15	225 mm x 125 mm x 140 mm	520.50 g	3.94 dm <sup>3</sup>
4050300331645	Shipping carton box 15	225 mm x 125 mm x 156 mm	463.20 g	4.39 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.