

PRODUCT FAMILY DATASHEET

HALOLINE Standard

Double ended halogen lamps with tube base



AREAS OF APPLICATION

- Ideal for emphasizing and accentuating buildings
- General illumination
- Entrance lighting
- Pathway lighting
- Garden lighting
- Traffic areas
- Shops
- Restaurants, hotels and similar prestigious applications
- Outdoor applications only in suitable luminaires

PRODUCT BENEFITS

- Brilliant accent light
- No transformer required
- Contains no mercury

PRODUCT FEATURES

- Average life: 2,000 h
- 100 % dimmable
- Color rendering index R_a : 100
- Color temperature: 3,000 K
- Burning position: p15



TECHNICAL DATA

Product description	Electrical data				Photometrical data						
	Nominal wattage	Nominal voltage	Rated wattage	Power factor λ	Color temperature	Light color (designation)	Color rendering index Ra	Lumen main.fact.at end of nom.life time	Color temperature	Luminous flux	Color rendering index Ra
HALOLINE 750 W 230 V R7S ¹⁾	750.00 W	230 V	750.00 W	1.00	2900 K	Warm White	100	0.80	2900 K	16500 lm	100
HALOLINE 1000 W 230 V R7S ¹⁾	1000.00 W	230 V	1000.00 W	1.00	2900 K	Warm White	100	0.80	2900 K	22000 lm	100
HALOLINE 1000 W 240 V R7S ¹⁾	1000.00 W	240 V	1000.00 W	1.00	2900 K	Warm White	100	0.80	2900 K	22000 lm	100
HALOLINE 1500 W 230 V R7S ¹⁾	1500.00 W	230 V	1500.00 W	1.00	2900 K	Warm White	100	0.80	2900 K	33000 lm	100
HALOLINE 1500 W 240 V R7S ¹⁾	1500.00 W	240 V	1500.00 W	1.00	2900 K	Warm White	100	0.80	2900 K	33000 lm	100
HALOLINE 2000 W 230 V R7S ¹⁾	2000.00 W	230 V	2000.00 W	1.00	2900 K	Warm White	100	0.80	2900 K	44000 lm	100

Product description	Light technical data		Dimensions & weight	Lifespan			Additional product data			Capabilities
	Starting time	Warm-up time (60 %)	Diameter	Nominal lamp life time	Rated lamp life time	Number of switching cycles	Base (standard designation)	Mercury content	Mercury-free	Burning position
HALOLINE 750 W 230 V R7S ¹⁾	0.0 s	0.00 s	12.0 mm	2000 h	2000 h	50000	R7s	0.0 mg	Yes	p15
HALOLINE 1000 W 230 V R7S ¹⁾	0.0 s	0.00 s	12.0 mm	2000 h	2000 h	50000	R7s	0.0 mg	Yes	p15
HALOLINE 1000 W 240 V R7S ¹⁾	0.0 s	0.00 s	12.0 mm	2000 h	2000 h	50000	R7s	0.0 mg	Yes	p15
HALOLINE 1500 W 230 V R7S ¹⁾	0.0 s	0.00 s	12.0 mm	2000 h	2000 h	50000	R7s	0.0 mg	Yes	p15
HALOLINE 1500 W 240 V R7S ¹⁾	0.0 s	0.00 s	12.0 mm	2000 h	2000 h	50000	R7s	0.0 mg	Yes	p15
HALOLINE 2000 W 230 V R7S ¹⁾	0.0 s	0.00 s	12.0 mm	2000 h	2000 h	50000	R7s	0.0 mg	Yes	p15

Product description	Dimmable	Certificates & standards	Country-specific categorizations
		Energy consumption	ILCOS
HALOLINE 750 W 230 V R7S ¹⁾	Yes	750 kWh/1000h	HDG-750-230-R7s-191,1
HALOLINE 1000 W 230 V R7S ¹⁾	Yes	1000 kWh/1000h	HDG-1000-230-R7s-191,1
HALOLINE 1000 W 240 V R7S ¹⁾	Yes	1000 kWh/1000h	HDG-1000-240-R7s-191,1
HALOLINE 1500 W 230 V R7S ¹⁾	Yes	1500 kWh/1000h	HDG-1500-230-R7s-256,1
HALOLINE 1500 W 240 V R7S ¹⁾	Yes	1500 kWh/1000h	HDG-1500-240-R7s-256,1
HALOLINE 2000 W 230 V R7S ¹⁾	Yes	2000 kWh/1000h	HDG-2000-230-R7s-333

1) Fuse protection with indicated values recommended acc. to IEC60357, EN60357/For outdoor applications and operation in damp locations special approved fixtures are required

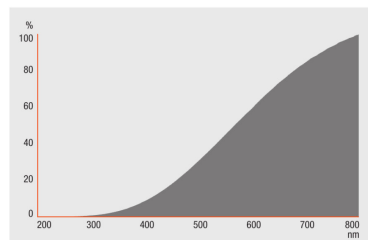

HALOLINE 750 W 230 V R7S, HALOLINE 1000 W 230 V R7S, HALOLINE 1000 W 240 V R7S, HALOLINE 1500 W 230 V R7S, HALOLINE 1500 W 240 V R7S, HALOLINE 2000 W 230 V R7S

HALOLINE 750 W 230 V R7S, HALOLINE 1000 W 230 V R7S, HALOLINE 1000 W 240 V R7S, HALOLINE 1500 W 230 V R7S, HALOLINE 1500 W 240 V R7S, HALOLINE 2000 W 230 V R7S

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300223933	Shipping carton box 12	245 mm x 85 mm x 112 mm	353.40 g	2.33 dm ³
4050300206875	Shipping carton box 12	245 mm x 85 mm x 112 mm	352.20 g	2.33 dm ³
4050300209913	Shipping carton box 12	245 mm x 85 mm x 112 mm	352.20 g	2.33 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300209128	Shipping carton box 12	315 mm x 84 mm x 117 mm	453.52 g	3.10 dm ³
4050300209937	Shipping carton box 12	315 mm x 84 mm x 117 mm	453.52 g	3.10 dm ³
4050300214481	Shipping carton box 12	395 mm x 129 mm x 96 mm	596.20 g	4.89 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.