

PRODUCT DATASHEET

DULUX S 9 W/827

OSRAM DULUX S | Short CFLni, with 2-pin base for CCG operation



AREAS OF APPLICATION

- Ideal for cost-effective creative illumination and decoration
- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants

PRODUCT BENEFITS

- Extremely economical
- Good quality of light
- Extremely low profile
- Long service life
- Improved maintenance

PRODUCT FEATURES

- Color rendering index $R_a \geq 80$
- Short and compact pin-base lamps with single-turn tubes
- Single-ended two-pin plug-in G23 base



TECHNICAL DATA

Electrical data

Rated wattage	8.70 W
Nominal wattage	9.00 W

Photometrical data

Nominal luminous flux	600 lm
Luminous flux at 25 °C	600 lm
Rated luminous flux	600 lm
Rated color temperature	2700 K
Color rendering index Ra	≥80
Rated LLMF at 2,000 h	0.85
Rated LLMF at 4,000 h	0.78
Rated LLMF at 6,000 h	0.76
Rated LLMF at 8,000 h	0.75
Light color (designation)	LUMILUX INTERNA
Color temperature	2700 K
Luminous flux	600 lm
Color rendering index Ra	≥80

— Dimensions & weight



Diameter	12.0 mm
Overall length	165.0 mm
Length	168.0 mm
Length acc. to IEC standard	145 mm
Length with base excl. base pins/connection	144.00 mm
Outer bulb	T12
Maximum diameter	12.0 mm

Lifespan

Nominal lamp life time	10000 h
Rated lamp life time	10000 h
Service life	6500 h
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.95
Rated lamp survival factor at 8,000 h	0.81
Operation mode LLMF/LSF	50 Hz
Lifespan	10000 h ¹⁾

¹⁾ With CCG/LLCG

Additional product data

Base (standard designation)	G23
Mercury content	1.3 mg


Certificates & standards

Energy consumption	12 kWh/1000h
Energy efficiency class	A

Country-specific categorizations


ILCOS	FSD-9/827-I-G23
-------	-----------------

Light Distribution

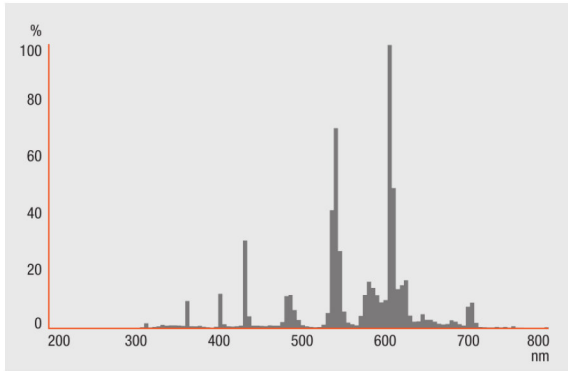


Spectral power distribution


Wiring Diagram

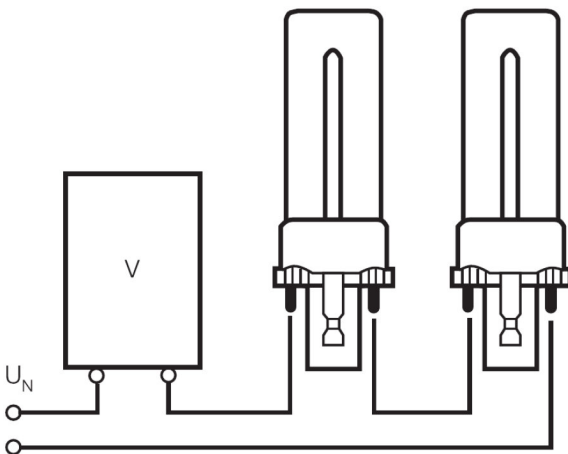

Wiring diagram

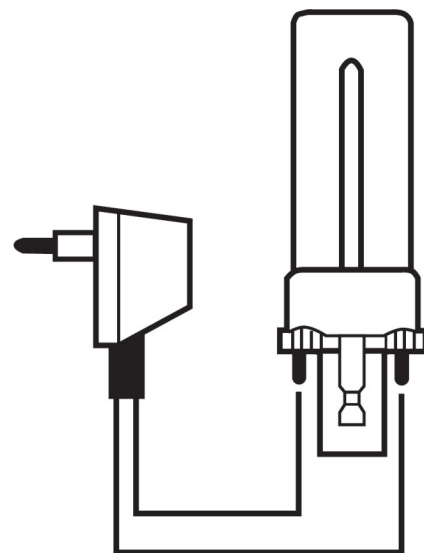


Wiring diagram

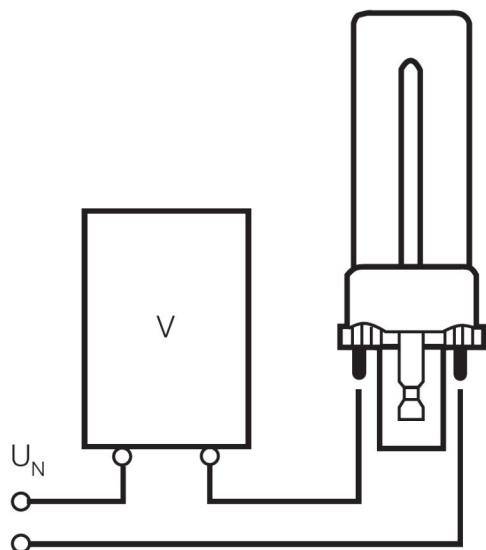

Wiring diagram

EQUIPMENT / ACCESSORIES

- Suitable for operation on conventional control gear



Others graphics

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300006000	Folding carton box 1	171 mm x 23 mm x 36 mm	36.90 g	0.14 dm ³
4008321908773	Shipping carton box 10	136 mm x 174 mm x 82 mm	421.00 g	1.94 dm ³

4050300006093	Blister 1	245 mm x 22 mm x 65 mm	39.90 g	0.35 dm ³
4050300229805	Shipping carton box 10	262 mm x 101 mm x 121 mm	499.00 g	3.20 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.