

# PRODUCT FAMILY DATASHEET

## LUMILUX DE LUXE T5 Short

Tubular fluorescent lamps 16 mm, short, with G5 base



---

### AREAS OF APPLICATION

- Shops
- Supermarkets and department stores
- Public buildings
- Ideal where color rendering is an important factor

---

### PRODUCT BENEFITS

- Excellent color rendering
- Ideal for cost-effective creative illumination and decoration
- Very good luminous flux maintenance throughout the life of the lamp
- Slim and compact

---

### PRODUCT FEATURES

- Average lifetime: up to 10,000 h (with QUICKTRONIC ECG)
- Very good color rendering group: 1A ( $R_a \geq 90$ )





TECHNICAL DATA


Product description	Electrical data	Photometrical data							Dimensions & weight		Temperatures & operating conditions	Lifespan
	Nominal wattage	Color rendering index Ra	Color temperature	Light color (designation)	Color temperature	Luminous flux	Color rendering index Ra	Luminous flux at 25 °C	Tube diameter	Length with base excl. base pins/connection	Rated ambient temp.w. max.luminous flux	Lifespan
L 6 W/930	6.00 W	≥90	3000 K	LUMILUX DE LUXE Warm White	3000 K	260 lm	≥90		16 mm	212.00 mm	35.0 °C	10000 h <sup>1)</sup>
L 8 W/930	8.00 W	≥90	3000 K	LUMILUX DE LUXE Warm White	3000 K	380 lm	≥90	380 lm	16 mm	288.00 mm	35.0 °C	10000 h <sup>1)</sup>
L 13 W/930	13.00 W	≥90	3000 K	LUMILUX DE LUXE Warm White	3000 K	680 lm	≥90	680 lm	16 mm	517.00 mm	35.0 °C	8000 h <sup>1)</sup>

Product description	Additional product data		Capabilities	Certificates & standards	
	Base (standard designation)	Show WEEE picto	Dimmable	Energy efficiency class	Energy consumption
L 6 W/930	G5	Yes	Yes	B	7 kWh/1000h
L 8 W/930	G5	Yes	Yes	A	8 kWh/1000h
L 13 W/930	G5	Yes	Yes	B	15 kWh/1000h

<sup>1)</sup> With preheat ECG

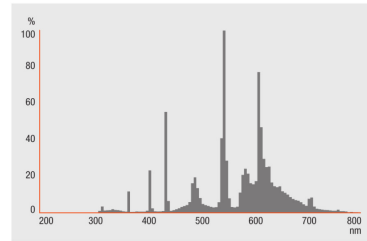

Die Zuleitungen 3 und 4 sollen so kurz wie möglich sein





Die Zuleitungen 3 und 4 sollen so kurz wie möglich sein

L 6 W/930, L 8 W/930, L 13 W/930

L 6 W/930, L 8 W/930, L 13 W/930

L 6 W/930, L 8 W/930, L 13 W/930

L 6 W/930, L 8 W/930, L 13 W/930



L 6 W/930, L 8 W/930, L 13 W/930

L 6 W/930, L 8 W/930, L 13 W/930

L 8 W/930

---

## SYSTEM GUARANTEE

OSRAM System+ Guarantee in combination with OSRAM ECGs

---

## SAFETY ADVICE

In case of lamp breakage: [www.ledvance.com/brokenlamp](http://www.ledvance.com/brokenlamp)

---

## APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

---

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300244198	Shipping carton box 25	247 mm x 112 mm x 106 mm	736.00 g	2.93 dm <sup>3</sup>
4050300244204	Shipping carton box 25	318 mm x 114 mm x 104 mm	957.00 g	3.77 dm <sup>3</sup>
4050300244211	Shipping carton box 25	552 mm x 117 mm x 104 mm	1587.00 g	6.72 dm <sup>3</sup>

---

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

## REFERENCES / LINKS

For more information on the system guarantee and the terms and conditions of the guarantee visit

▶ [www.ledvance.com/system-guarantee](http://www.ledvance.com/system-guarantee)

---

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

---