

# PRODUCT FAMILY DATASHEET

## Starters for series operation at 230 V AC



---

### PRODUCT FEATURES


- Temperature range for reliable cut-out: -20...+80 °C




TECHNICAL DATA

	Electrical data	Dimensions & weight	Additional product data	Capabilities
Product description	Nominal wattage	Length	Show WEEE picto	Dimmable
ST 151 LONGLIFE	22.00 W	40.3 mm	Yes	No
ST 172 SAFETY DEOS <sup>1)</sup>	22.00 W	40.3 mm	Yes	No


<sup>1)</sup> Temperature range for reliable switch-off: -20...+80 °C

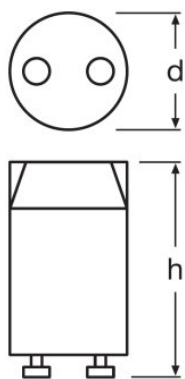

ST 151 LONGLIFE

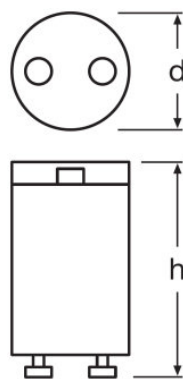

ST 172 SAFETY DEOS

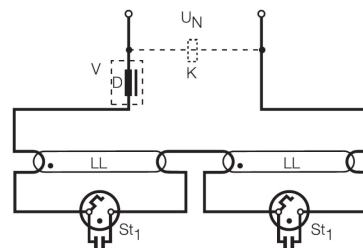

ST 151 LONGLIFE

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300212876	Shipping carton box 1200	400 mm x 235 mm x 325 mm	8362.00 g	30.55 dm <sup>3</sup>
4050300119595	Shipping carton box 20	165 mm x 154 mm x 133 mm	308.67 g	3.38 dm <sup>3</sup>
4050300797892	Shipping carton box 400	227 mm x 179 mm x 227 mm	2796.25 g	9.22 dm <sup>3</sup>
4050300797793	Shipping carton box 200	227 mm x 98 mm x 227 mm	2086.00 g	5.05 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.