

PRODUCT DATASHEET PT-FIT 35/220...240 I

POWERTRONIC PT-FIT I | ECG for HID lamps, with cable clamp



AREAS OF APPLICATION

- Shop lighting
- Health and fitness areas (in dry, corrosion-protected place)
- Effect and accent lighting

PRODUCT BENEFITS

- ECG with ergonomic strain relief for correct installation in suspended ceilings
- Optimized cost/benefit factor
- Automatic safety shutdown of lamps in the event of a defect or at end of life (EoL)

PRODUCT FEATURES

- Energy Efficiency Index EEI: A2
- Supply voltage: 220...240 V
- Line frequency: 50...60 Hz
- RI suppression: to EN 55015/CISPR 15
- Safety: to EN 61347-2-12
- Line harmonics according to EN 61000-3-2
- Immunity according to EN 61547

TECHNICAL DATA

Electrical data

Lamp wattage	39 W
Line current	0.19 A ¹⁾
Ignition voltage	4.5 kVp
Operating frequency	0.200...0.240 kHz
System wattage [AGGR]	43.00 W
ECG efficiency	92 %
Input voltage AC	198...264 V
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Power factor λ	0.95 ²⁾
Inrush current	30 A ³⁾
Max. ECG no. on circuit breaker 10 A (B)	15 ⁴⁾
Max. ECG no. on circuit breaker 16 A (B)	26 ⁴⁾
Max. no. of ECGs on 16A MCB with EBN-OS	65 ⁴⁾
Protective conductor current	0.3 mA
U-OUT (working voltage)	250 V
Max. working voltage between LH and LL	250 V
Max. working voltage betw. LL/LH & earth	250 V
Max. capacitance of wire ECG/lamp	120 pF


¹⁾ At 230 V_{AC}

²⁾ Minimum

³⁾ $t_{width} = 150 \mu s$ (measured at 50 % I_{peak})

⁴⁾ Type B

Dimensions & weight



Length	172.0 mm
Width	83.0 mm
Height	33.0 mm

Mounting hole spacing, length	163.0 mm
Cable cross-section, input side	0.75...1.5 / 0.75...2.5 mm ^{2 1)}
Cable cross-section, output side	0.75...1.5 / 0.75...2.5 mm ^{2 1)}
Wire preparation length, input side	5.5...6.5 mm
Wire preparation length, output side	5.5...6.5 mm
Product weight	285.00 g

¹⁾ With ferrule / Without ferrule

Colors & materials

Casing material	Plastic
------------------------	---------

Temperatures & operating conditions

Ambient temperature range	-15...+60 °C
Maximum temperature at tc test point	75 °C

Lifespan

ECG lifetime	30000 h ¹⁾
---------------------	-----------------------

¹⁾ At maximum T_c / 10% failure rate

Additional product data

Design / version	With cable clamp
-------------------------	------------------


Capabilities

Max. cable length to lamp/LED module	1.5 m
Overheating protection	Power reduction and switch off at T > 75 °C at the tc point
ECG reset time	> 0.5 s
Cable/wire types, input side	NYM-J 3x1.5 / NYM-J 3x2.5 / H05VV-F 3x1.5 / NHXMH-J 3x1.5 mm ²
Cable/wire types, output side	SIHF-J 3x1.5 / SIHF-J 3x2.5 / SIHSI 3x1.0 mm ²
Dimmable	No
Restriction on ignition time	20 min
Suitable for fixtures with prot. class	I

Certificates & standards

Approval marks – approval	VDE / VDE-EMC / EAC / C-Tick
Type of protection	IP20
EEL – Energy Label	A2
Standards	Acc. to EN 61347-2-12/Acc. to EN 55015/Acc. to EN 61000-3-2/Acc. to EN 61547/Acc. to EN 62493

Wiring Diagram

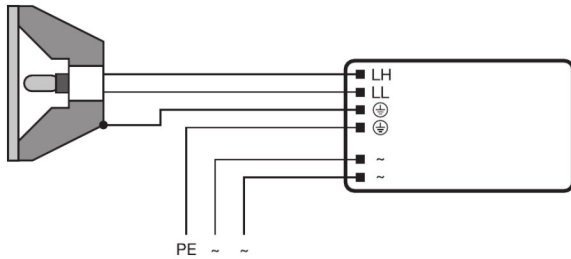

Wiring diagram







THERMAL CHARACTERISTICS







- Ballast losses and lamp heat radiation can lead to heat accumulation in a completely closed case. Therefore it is necessary to ensure that the temperature at the measuring point t_c of the ECG does not exceed the maximum value.

ATTENTION!

For safety reasons disconnect the device before replacing the lamp!

DOWNLOAD DATA

File	
	Product Datasheet 321397_ATI PT-FIT 35220-240 I (G+GB)
	Tender documents 339884_Tender Document for POWERTRONIC EVG.eng
	Certificates 554891_EAC PT family
	Certificates 335123_EMC-Marks approval
	Certificates 335124_VDE-Marks approval
	Declarations of conformity EU Declaration of Conformity 3035574

	Declarations of conformity VD EMC Certificate 40025469
	Installation/Operation notice 334206_Technical guide - POWERTRONIC for HID-lamps (GB)
	Operating instructions 590731_EAC - PTI I PT-FIT I
	CAD data 3-dim 321673_CAD PTI-FIT 3570 I
	CAD data 3-dim 321674_CAD PTI-FIT 3570 I
	CAD data 3-dim 321675_CAD PTI-FIT 3570 I

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4008321377678	Shipping carton box 20	437 mm x 100 mm x 365 mm	6130.00 g	15.95 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

POWERTRONIC PT-FIT I | ECG for HID lamps, with cable clamp