

PRODUCT DATASHEET

HCI-TS 150 W/942 NDL PB

POWERBALL HCI-TS | Metal halide lamps with ceramic technology for enclosed luminaires



AREAS OF APPLICATION

- Shopping arcades
- Foyers, reception areas
- Museums, exhibitions
- Exhibition halls and trade fairs
- Factories and workshops
- Buildings, monuments, bridges
- Approved only for use in enclosed luminaires
- Outdoor applications only in suitable luminaires

PRODUCT BENEFITS

- Very high efficiency
- Good to excellent color rendering
- Very good color stability
- UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter

PRODUCT FEATURES

- POWERBALL ceramic technology
- Average lifetime: 15,000 h (operation with ECG with 70...400 Hz square-wave current)
- Average lifetime: 12,000 h (with magnetic control gear)



TECHNICAL DATA

Electrical data

Rated wattage	147.00 W
Lamp current	1.8 A
PFC capacitor at 50 Hz	20 µF ¹⁾
Nominal wattage	150.00 W
Ignition voltage	3.6 / 5.0 kVp ²⁾

¹⁾ At rated voltage and $\cos \varphi \geq 0.9$


²⁾ Minimum; for superimposed ignition with square wave electronic ballast 3.0 kVp are sufficient / Maximum; this limit is for safety reasons

Photometrical data

Luminous flux	14800 lm
Luminous efficacy	101 lm/W ¹⁾
Color rendering index Ra	93
Color temperature	4200 K
Light color	940
Rated LLMF at 2,000 h	0.85
Rated LLMF at 4,000 h	0.75
Rated LLMF at 6,000 h	0.70
Rated LLMF at 8,000 h	0.67
Rated LLMF at 12,000 h	0.65
UV protection	Yes
Color temperature	4000 K

¹⁾ In operation with low frequency square wave electronic ballast, 70...400 Hz. Operation with electromagnetic ballast may be less efficient.

Dimensions & weight



Diameter	23.0 mm
Length	138.0 mm
Light center length (LCL)	69.0 mm
Product weight	26.00 g

Temperatures & operating conditions

Maximum permitted outer bulb temperature	650 °C
Maximum permitted pinch temperature	330 °C

Lifespan

Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.98
Rated lamp survival factor at 6,000 h	0.97
Rated lamp survival factor at 8,000 h	0.95
Rated lamp survival factor at 12,000 h	0.80
Lifespan B50	15000 h ¹⁾
Operation mode LLMF/LSF	ECG

¹⁾ At ECG

Additional product data

Base (standard designation)	RX7s-24
System guarantee level	3 (2/5)
Mercury content	18.2 mg ¹⁾

¹⁾ Maximum

Capabilities

Dimmable	Yes ¹⁾
Burning position	p45
Enclosed luminaire required	Yes

¹⁾ In combination with POWERTRONIC PTo


Certificates & standards

Energy efficiency class	A+
Energy consumption	162 kWh/1000h

Country-specific categorizations

ILCOS	MD/UB-150/942-H/SL-RX7s=24-25/132/H
-------	-------------------------------------

Light Distribution

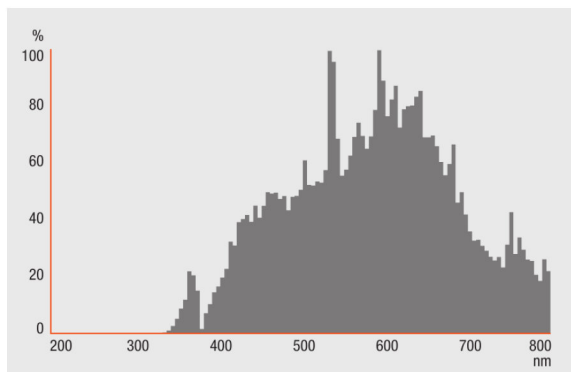

Spectral power distribution

SYSTEM GUARANTEE

- When operated with OSRAM POWERTRONIC control gear, an extended system guarantee is granted for these lamps

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4008321679871	Folding carton box 1	159 mm x 42 mm x 42 mm	43.00 g	0.28 dm ³
4008321679888	Shipping carton box 12	180 mm x 178 mm x 142 mm	603.00 g	4.55 dm ³
4052899372351	Folding carton box 1	42 mm x 42 mm x 159 mm	47.00 g	0.28 dm ³
4052899372368	Shipping carton box 12	180 mm x 140 mm x 175 mm	548.00 g	4.41 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For more information on the system guarantee and the terms and conditions of the guarantee visit

- ▶ www.ledvance.com/system-guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

POWERBALL HCI-TS | Metal halide lamps with ceramic technology for enclosed luminaires