

## PRODUCT FAMILY DATASHEET OPTOTRONIC Intelligent

### – Dimmable DALI SELV LEDset (LT2)



#### AREAS OF APPLICATION

- Linear lighting for office, education, storage areas and retail
- Installation in emergency lighting systems according to IEC 61347-2-13, appendix J
- Suitable for luminaires of protection class I

#### PRODUCT FAMILY BENEFITS

- Fully programmable via software (DALI Interface)
- Flexible current setting (LEDset2)
- Lifetime: up to 100,000 h (temperature at  $T_c = 65\text{ °C}$ , max. 10 % failure rate)
- High-quality dimming of 1...100 % by amplitude dimming (except 80 W versions)
- High quality of light thanks to <1% output ripple current
- Very high efficiency
- Very low standby power consumption: < 0.15 W \*
- Fulfill safety requirement due to overload, overtemperature, Hot Plug protection

#### PRODUCT FAMILY BENEFITS

- Fully programmable via software (DALI Interface)
- Flexible current setting (LEDset2)
- Lifetime: up to 100,000 h (temperature at  $T_c = 65\text{ °C}$ , max. 10 % failure rate)
- High-quality dimming of 1...100 % by amplitude dimming (except 80 W versions)
- High quality of light thanks to <1% output ripple current
- Very high efficiency
- Very low standby power consumption: < 0.15 W \*
- Fulfill safety requirement due to overload, overtemperature, Hot Plug protection

**VERSATILE SCOPE OF APPLICATION DUE TO OSRAM DALI TECHNOLOGY:**

- Easy to use in corridors and restrooms because of three-level Corridor function
- Touch DIM application: easy to control via pushbutton or sensor
- Energy efficient Touch DIM operation due to automatic switch-off at sufficient residual light
- Suitable for emergency Installations (acc. to EN 60598-2-22 and IEC 61347-2-13, appendix J) thanks to DC detection (0 Hz, pulsating DC), on/off switchable
- Feedback of power consumption and operating hours (Fit for SMART GRID)
- Suitable for buildings according to EPBD/BREEAM/LEED due to automatic Constant Lumen Output setting
- Luminaire information for easy maintenance

**VERSATILE SCOPE OF APPLICATION DUE TO OSRAM DALI TECHNOLOGY:**

- Easy to use in corridors and restrooms because of three-level Corridor function
- Touch DIM application: easy to control via pushbutton or sensor
- Energy efficient Touch DIM operation due to automatic switch-off at sufficient residual light
- Suitable for emergency Installations (acc. to EN 60598-2-22 and IEC 61347-2-13, appendix J) thanks to DC detection (0 Hz, pulsating DC), on/off switchable
- Feedback of power consumption and operating hours (Fit for SMART GRID)
- Suitable for buildings according to EPBD/BREEAM/LEED due to automatic Constant Lumen Output setting
- Luminaire information for easy maintenance

**PRODUCT FAMILY FEATURES**

- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Versatile DALI window driver up to 80 W due to flexible output characteristic
- Supply voltage: 220...240 V
- Available with output current range: up to 2,100 mA
- Constant Lumen Output (CLO)
- Integrated customizable thermal management (Driver Guard)
- DALI-2 certified (Part -101,-102 and -207)

**TECHNICAL DATA**

**Electrical data**

Product description	Nominal voltage	Mains frequency	Input voltage AC	Input voltage DC	Total harmonic distortion	Power factor λ
OTi DALI 35/220...240/700 LT2 L G2	220...240 V	50...60 Hz	198...264 V	176...276 V	< 15 %	> 0.95
OTi DALI 50/220...240/1A4 LT2 L G2	220...240 V	50...60 Hz	198...264 V	176...276 V	< 15 %	> 0.95
OTi DALI 35/220...240/700 LT2 L	220...240 V	50...60 Hz	198...264 V <sup>1)</sup>	176...276 V	< 11 %	> 0.95 <sup>2)</sup>
OTi DALI 80/220...240/1A6 LT2 L	220...240 V	50...60 Hz	198...264 V <sup>1)</sup>	176...276 V	< 20 %	> 0.95 <sup>2)</sup>
OTi DALI 80/220...240/2A1 LT2 L	220...240 V	50...60 Hz	198...264 V <sup>1)</sup>	176...276 V	< 20 %	> 0.95 <sup>2)</sup>
OTi DALI 90/220...240/1A0 LT2 L	220...240 V	50...60 Hz	198...264 V <sup>1)</sup>	176...276 V	< 10 %	> 0.95
OTi DALI 90/220...240/700 D LT2 L	220...240 V	50...60 Hz	198...264 V <sup>1)</sup>	176...276 V	< 10 %	> 0.95
OTi DALI 60/220...240/550 D LT2 L	220...240 V	50...60 Hz	198...264 V <sup>1)</sup>	176...276 V	< 10 %	> 0.95
OTi DALI 35/220-240/400 D LT2 L	220...240 V	50...60 Hz	198...264 V <sup>1)</sup>	176...276 V	< 10 %	> 0.95

Product description	ECG efficiency	Device power loss	Power loss in stand-by mode	Protective conductor current	Inrush current	Max. ECG no. on circuit breaker 10 A (B)	Max. ECG no. on circuit breaker 16 A (B)
OTi DALI 35/220...240/700 LT2 L G2	up to 90 %	4.0 W	<0.15 W	<0.5 mA	20 A	15	24
OTi DALI 50/220...240/1A4 LT2 L G2	up to 91 %	6.0 W	<0.15 W	<0.5 mA	20 A	13	20
OTi DALI 35/220...240/700 LT2 L	≥90 % <sup>3)</sup>	4.4 W <sup>4)</sup>	<0.5 W	<2.0 mA	32 A <sup>5)</sup>	18	30
OTi DALI 80/220...240/1A6 LT2 L	≥90 % <sup>3)</sup>	8.5 W <sup>4)</sup>	<0.5 W	<2.0 mA	53 A <sup>9)</sup>	8	13
OTi DALI 80/220...240/2A1 LT2 L	≥90 % <sup>3)</sup>	10 W <sup>4)</sup>	<0.5 W	<2.0 mA	53 A <sup>9)</sup>	8	13
OTi DALI 90/220...240/1A0 LT2 L	≤94 % <sup>3)</sup>	9.0 W <sup>4)</sup>	<0.25 W	<0.5 mA	25 A <sup>10)</sup>	15	24
OTi DALI 90/220...240/700 D LT2 L	≤93 % <sup>3)</sup>	9.0 W <sup>4)</sup>	<0.25 W	<0.5 mA	25 A	15	24
OTi DALI 60/220...240/550 D LT2 L	≤93 % <sup>3)</sup>	5.0 W <sup>4)</sup>	<0.25 W	<0.5 mA	25 A <sup>10)</sup>	15	24
OTi DALI 35/220-240/400 D LT2 L	≤92 % <sup>3)</sup>	4.0 W <sup>4)</sup>	<0.25 W	<0.5 mA	17 A <sup>13)</sup>	18	28

Product description	Max. ECG no. on circuit breaker 25 A (B)	Surge capability (L/N-Ground)	Surge capability (L-N)	Nominal output voltage	U-OUT (working voltage)
OTi DALI 35/220...240/700 LT2 L G2	-	2 kV	1 kV	15...54 V	< 60 V
OTi DALI 50/220...240/1A4 LT2 L G2	-	2 kV	1 kV	15...54 V	< 60 V
OTi DALI 35/220...240/700 LT2 L	-	2 kV	1 kV	20...54 V <sup>6)</sup>	60 V
OTi DALI 80/220...240/1A6 LT2 L	-	2 kV	1 kV	20...54 V <sup>6)</sup>	< 60 V
OTi DALI 80/220...240/2A1 LT2 L	-	2 kV	1 kV	20...54 V <sup>6)</sup>	< 60 V
OTi DALI 90/220...240/1A0 LT2 L	29	2 kV	1 kV	54...240 V <sup>11)</sup>	< 250 V
OTi DALI 90/220...240/700 D LT2 L	-	2 kV	1 kV	54...240 V <sup>11)</sup>	< 250 V
OTi DALI 60/220...240/550 D LT2 L	37	2 kV	1 kV	54...240 V <sup>11)</sup>	< 250 V
OTi DALI 35/220-240/400 D LT2 L	43	2 kV	1 kV	54...240 V <sup>14)</sup>	< 250 V

Product description	Nominal output current	Output current tolerance	Output ripple current (100 Hz)	Nominal output power	Galvanic isolation
OTi DALI 35/220...240/700 LT2 L G2	200...700 mA	±3 %	< 1 %	4...37 W	SELV
OTi DALI 50/220...240/1A4 LT2 L G2	600...1400 mA	±3 %	< 1 %	12...50 W	SELV
OTi DALI 35/220...240/700 LT2 L	200...700 mA <sup>7)</sup>	±2 %	< 1 %	35 W	SELV
OTi DALI 80/220...240/1A6 LT2 L	600...1550 mA <sup>7)</sup>	±3 %	< 1 %	32...80 W	SELV
OTi DALI 80/220...240/2A1 LT2 L	1000...2100 mA <sup>7)</sup>	±3 %	< 1 %	32...80 W	SELV
OTi DALI 90/220...240/1A0 LT2 L	250...1000 mA <sup>12)</sup>	±3 %	< 1 %	13.5...90 W	Non isolated
OTi DALI 90/220...240/700 D LT2 L	250...700 mA	±3 %	< 1 %	13.5...90 W	Non isolated
OTi DALI 60/220...240/550 D LT2 L	120...550 mA <sup>12)</sup>	±3 %	< 1 %	6.4...60 W	Non isolated
OTi DALI 35/220-240/400 D LT2 L	75...400 mA <sup>12)</sup>	±3 %	< 1 %	4...38 W	Non isolated

Product description	Galvanic isolation primary/secondary
OTi DALI 35/220...240/700 LT2 L G2	
OTi DALI 50/220...240/1A4 LT2 L G2	
OTi DALI 35/220...240/700 LT2 L	3.75 kV <sup>8)</sup>
OTi DALI 80/220...240/1A6 LT2 L	3.75 kV <sup>8)</sup>
OTi DALI 80/220...240/2A1 LT2 L	3.75 kV <sup>8)</sup>



Product description	Galvanic isolation primary/secondary
OTi DALI 90/220...240/1A0 LT2 L	
OTi DALI 90/220...240/700 D LT2 L	
OTi DALI 60/220...240/550 D LT2 L	
OTi DALI 35/220-240/400 D LT2 L	

- 1) Permitted voltage range
- 2) Full load at 230 V
- 3) At full load and 230 V
- 4) Maximum
- 5)  $t_{width} = 100 \mu s$  (measured at 50 %  $I_{peak}$ )
- 6) Maximum 60 V
- 7)  $\pm 2\%$
- 8) SELV-equivalent
- 9) At 200  $\mu s$
- 10) At 280  $\mu s$
- 11) Maximum 250 V
- 12)  $\pm 5\%$
- 13) At 170  $\mu s$
- 14) Maximum 350 V

**Dimensions & weight**



Product description	Length	Width	Height	Product weight
OTi DALI 35/220...240/700 LT2 L G2	360.0 mm	30.0 mm	21.0 mm	240.00 g
OTi DALI 50/220...240/1A4 LT2 L G2	360.0 mm	30.0 mm	21.0 mm	240.00 g
OTi DALI 35/220...240/700 LT2 L	360.0 mm	30.0 mm	21.0 mm	275.00 g
OTi DALI 80/220...240/1A6 LT2 L	360.0 mm	30.0 mm	21.0 mm	285.00 g
OTi DALI 80/220...240/2A1 LT2 L	360.0 mm	30.0 mm	21.0 mm	285.00 g
OTi DALI 90/220...240/1A0 LT2 L	280.0 mm	30.0 mm	21.0 mm	205.00 g
OTi DALI 90/220...240/700 D LT2 L	280.0 mm	30.0 mm	21.0 mm	205.00 g
OTi DALI 60/220...240/550 D LT2 L	280.0 mm	30.0 mm	21.0 mm	205.00 g
OTi DALI 35/220-240/400 D LT2 L	280.0 mm	30.0 mm	21.0 mm	205.00 g

Product line drawing

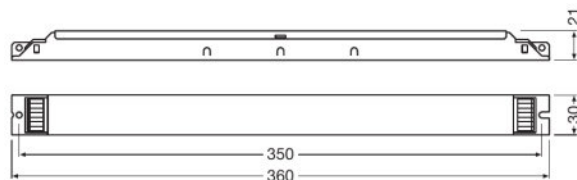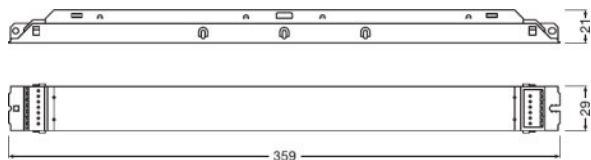

OTi DALI 35/220...240/700 LT2 L G2, OTi DALI 50/220...240/1A4 LT2 L G2

OTi DALI 35/220...240/700 LT2 L, OTi DALI 80/220...240/1A6 LT2 L, OTi DALI 80/220...240/2A1 LT2 L

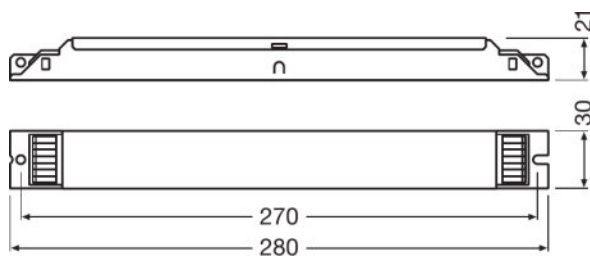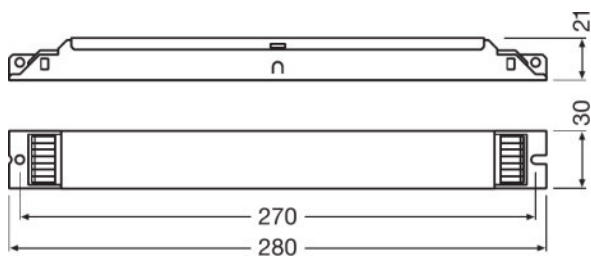

OTi DALI 90/220...240/1A0 LT2 L, OTi DALI 90/220...240/700 D LT2 L, OTi DALI 60/220...240/550 D LT2 L

OTi DALI 35/220-240/400 D LT2 L

## Colors & materials

Product description	Casing material
OTi DALI 35/220...240/700 LT2 L G2	Metal
OTi DALI 50/220...240/1A4 LT2 L G2	Metal
OTi DALI 35/220...240/700 LT2 L	Metal
OTi DALI 80/220...240/1A6 LT2 L	Metal
OTi DALI 80/220...240/2A1 LT2 L	Metal
OTi DALI 90/220...240/1A0 LT2 L	Metal
OTi DALI 90/220...240/700 D LT2 L	Metal
OTi DALI 60/220...240/550 D LT2 L	Metal
OTi DALI 35/220-240/400 D LT2 L	Metal

## Temperatures & operating conditions

Product description	Ambient temperature range	Maximum temperature at tc test point	Max.housing temperature in case of fault	Permitted rel. humidity during operation
OTi DALI 35/220...240/700 LT2 L G2	-25...+50 °C	75 °C	110 °C	5...85 % <sup>1)</sup>
OTi DALI 50/220...240/1A4 LT2 L G2	-25...+50 °C	75 °C	110 °C	5...85 % <sup>1)</sup>
OTi DALI 35/220...240/700 LT2 L	-25...+60 °C	75 °C	110 °C	5...85 % <sup>1)</sup>
OTi DALI 80/220...240/1A6 LT2 L	-25...+50 °C	80 °C	120 °C	5...85 % <sup>1)</sup>
OTi DALI 80/220...240/2A1 LT2 L	-25...+45 °C	80 °C	120 °C	5...85 % <sup>1)</sup>
OTi DALI 90/220...240/1A0 LT2 L	-25...+50 °C	75 °C	110 °C	5...85 % <sup>1)</sup>
OTi DALI 90/220...240/700 D LT2 L	-25...+50 °C	75 °C	110 °C	5...85 % <sup>1)</sup>
OTi DALI 60/220...240/550 D LT2 L	-25...+60 °C	75 °C	110 °C	5...85 % <sup>1)</sup>
OTi DALI 35/220-240/400 D LT2 L	-25...+60 °C	75 °C	110 °C	5...85 % <sup>1)</sup>

<sup>1)</sup> Maximum 56 days/year at 85 %

## Lifespan

Product description	ECG lifetime
OTi DALI 35/220...240/700 LT2 L G2	50000 / 100000 h <sup>1)</sup>
OTi DALI 50/220...240/1A4 LT2 L G2	50000 / 100000 h <sup>1)</sup>
OTi DALI 35/220...240/700 LT2 L	50000 / 100000 h <sup>1)</sup>
OTi DALI 80/220...240/1A6 LT2 L	50000 / 100000 h <sup>1)</sup>
OTi DALI 80/220...240/2A1 LT2 L	50000 / 100000 h <sup>1)</sup>
OTi DALI 90/220...240/1A0 LT2 L	50000 / 100000 h <sup>1)</sup>
OTi DALI 90/220...240/700 D LT2 L	50000 / 100000 h <sup>1)</sup>
OTi DALI 60/220...240/550 D LT2 L	50000 / 100000 h <sup>1)</sup>
OTi DALI 35/220-240/400 D LT2 L	50000 / 100000 h <sup>1)</sup>

<sup>1)</sup> At maximum  $T_c = 75^\circ\text{C}$  / 10% failure rate

**Additional product data**

Product description	Encapsulated
OTi DALI 35/220...240/700 LT2 L G2	No
OTi DALI 50/220...240/1A4 LT2 L G2	No
OTi DALI 35/220...240/700 LT2 L	No
OTi DALI 80/220...240/1A6 LT2 L	No
OTi DALI 80/220...240/2A1 LT2 L	No
OTi DALI 90/220...240/1A0 LT2 L	No
OTi DALI 90/220...240/700 D LT2 L	No
OTi DALI 60/220...240/550 D LT2 L	No
OTi DALI 35/220-240/400 D LT2 L	No

**Capabilities**

Product description	Dimmable	Dimming interface	Dimming range	Dimming method
OTi DALI 35/220...240/700 LT2 L G2	Yes	DALI / Touch DIM	1...100 %	Amplitude Modulation
OTi DALI 50/220...240/1A4 LT2 L G2	Yes	DALI / Touch DIM	1...100 %	Amplitude Modulation
OTi DALI 35/220...240/700 LT2 L	Yes	DALI / Touch DIM / Touch DIM Sensor	1...100 % <sup>1)</sup>	Amplitude Modulation / Pulse Width Modulation
OTi DALI 80/220...240/1A6 LT2 L	Yes	DALI / Touch DIM / Touch DIM Sensor	1...100 % <sup>1)</sup>	Amplitude Modulation / Pulse Width Modulation
OTi DALI 80/220...240/2A1 LT2 L	Yes	DALI / Touch DIM / Touch DIM Sensor	1...100 % <sup>1)</sup>	Amplitude Modulation / Pulse Width Modulation
OTi DALI 90/220...240/1A0 LT2 L	Yes	DALI / Touch DIM / Touch DIM Sensor	1...100 % <sup>1)</sup>	Full analogue dimming
OTi DALI 90/220...240/700 D LT2 L	Yes	DALI / Touch DIM / Touch DIM Sensor	1...100 % <sup>1)</sup>	Full analogue dimming
OTi DALI 60/220...240/550 D LT2 L	Yes	DALI / Touch DIM / Touch DIM Sensor	1...100 % <sup>1)</sup>	Full analogue dimming
OTi DALI 35/220-240/400 D LT2 L	Yes	DALI / Touch DIM / Touch DIM Sensor	1...100 % <sup>1)</sup>	Full analogue dimming

Product description	Constant lumen function	Overheating protection	Overload protection
OTi DALI 35/220...240/700 LT2 L G2	Yes	Automatic reversible	Non-reversible
OTi DALI 50/220...240/1A4 LT2 L G2	Yes	Automatic reversible	Non-reversible
OTi DALI 35/220...240/700 LT2 L	Programmable	Automatic reversible	Automatic reversible
OTi DALI 80/220...240/1A6 LT2 L	Programmable	Automatic reversible	Automatic reversible
OTi DALI 80/220...240/2A1 LT2 L	Programmable	Automatic reversible	Automatic reversible
OTi DALI 90/220...240/1A0 LT2 L	Programmable	Automatic reversible	Automatic reversible
OTi DALI 90/220...240/700 D LT2 L	Programmable	Automatic reversible	Automatic reversible
OTi DALI 60/220...240/550 D LT2 L	Programmable	Automatic reversible	Automatic reversible
OTi DALI 35/220-240/400 D LT2 L	Programmable	Automatic reversible	Automatic reversible

Product description	Short-circuit protection	No-load proof	Max. cable length to lamp/LED module	Suitable for fixtures with prot. class	Suitable for emergency lighting
OTi DALI 35/220...240/700 LT2 L G2	Yes	Yes	2.0 m	I	Yes
OTi DALI 50/220...240/1A4 LT2 L G2	Yes	Yes	2.0 m	I	Yes

Product description	Short-circuit protection	No-load proof	Max. cable length to lamp/LED module	Suitable for fixtures with prot. class	Suitable for emergency lighting
OTi DALI 35/220...240/700 LT2 L	Automatic reversible	Yes	2.0 m	I	Yes
OTi DALI 80/220...240/1A6 LT2 L	Automatic reversible	Yes	2.0 m	I	Yes
OTi DALI 80/220...240/2A1 LT2 L	Automatic reversible	Yes	2.0 m	I	Yes
OTi DALI 90/220...240/1A0 LT2 L	Automatic reversible	Yes	2.0 m	I	Yes
OTi DALI 90/220...240/700 D LT2 L	Automatic reversible	Yes	2.0 m	I	Yes
OTi DALI 60/220...240/550 D LT2 L	Automatic reversible	Yes	2.0 m	I	Yes
OTi DALI 35/220-240/400 D LT2 L	Automatic reversible	Yes	2.0 m	I	Yes

Product description	Type of connection, output side
OTi DALI 35/220...240/700 LT2 L G2	Push terminal
OTi DALI 50/220...240/1A4 LT2 L G2	Push terminal
OTi DALI 35/220...240/700 LT2 L	Push terminal
OTi DALI 80/220...240/1A6 LT2 L	Push terminal
OTi DALI 80/220...240/2A1 LT2 L	Push terminal
OTi DALI 90/220...240/1A0 LT2 L	Push terminal
OTi DALI 90/220...240/700 D LT2 L	Push terminal
OTi DALI 60/220...240/550 D LT2 L	Push terminal
OTi DALI 35/220-240/400 D LT2 L	Push terminal

<sup>1)</sup> For maximum nominal output current

### Certificates & standards

Product description	Approval marks – approval
OTi DALI 35/220...240/700 LT2 L G2	CE / EL / ENEC 10 / VDE-EMC / CCC / RCM
OTi DALI 50/220...240/1A4 LT2 L G2	CE / EL / ENEC 10 / VDE-EMC / CCC / RCM
OTi DALI 35/220...240/700 LT2 L	ENEC 10 / VDE / EMC / EL / CE
OTi DALI 80/220...240/1A6 LT2 L	CE / EL / ENEC 10 / VDE-EMC / CCC / RCM
OTi DALI 80/220...240/2A1 LT2 L	CE / EL / ENEC 10 / VDE-EMC / CCC / RCM
OTi DALI 90/220...240/1A0 LT2 L	CE / EL / ENEC 10 / VDE-EMC / CCC / RCM
OTi DALI 90/220...240/700 D LT2 L	CE / EL / ENEC 10 / VDE-EMC / CCC / RCM
OTi DALI 60/220...240/550 D LT2 L	CE / EL / ENEC 10 / VDE-EMC / CCC / RCM
OTi DALI 35/220-240/400 D LT2 L	CE / EL / ENEC 10 / VDE-EMC / CCC / RCM

Product description	Standards	Type of protection
OTi DALI 35/220...240/700 LT2 L G2	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386	IP20
OTi DALI 50/220...240/1A4 LT2 L G2	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386	IP20
OTi DALI 35/220...240/700 LT2 L	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384	IP20
OTi DALI 80/220...240/1A6 LT2 L	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384	IP20
OTi DALI 80/220...240/2A1 LT2 L	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384	IP20



Product description	Standards	Type of protection
OTi DALI 90/220...240/1A0 LT2 L	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386	IP20
OTi DALI 90/220...240/700 D LT2 L	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386	IP20
OTi DALI 60/220...240/550 D LT2 L	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386	IP20
OTi DALI 35/220-240/400 D LT2 L	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386	IP20

### Logistical data

Product description	Temperature range at storage
OTi DALI 35/220...240/700 LT2 L G2	-40...+85 °C
OTi DALI 50/220...240/1A4 LT2 L G2	-40...+85 °C
OTi DALI 35/220...240/700 LT2 L	-25...75 °C
OTi DALI 80/220...240/1A6 LT2 L	-25...85 °C
OTi DALI 80/220...240/2A1 LT2 L	-25...85 °C
OTi DALI 90/220...240/1A0 LT2 L	-25...85 °C
OTi DALI 90/220...240/700 D LT2 L	-25...85 °C
OTi DALI 60/220...240/550 D LT2 L	-25...85 °C
OTi DALI 35/220-240/400 D LT2 L	-25...85 °C






### APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.























### SALES AND TECHNICAL SUPPORT

Sales and Technical Support [www.ledvance.com](http://www.ledvance.com)

### DOWNLOAD DATA

File
 User instruction OPTOTRONIC LED Power Supply
 Product Datasheet Product datasheet OTI DALI 35 G2
 Certificates VDE ENEC Certificate 40038447
 Certificates VDE EMC Certificate 40038827
 Certificates OTI DALI LT2 L G2 CB DE1 60134 040320

	Declarations of conformity EU Declaration of Conformity 3634324 (EN)
	Declarations of conformity EATON(CEAG)-Conformity declaration AM06315_OTiDALI35_220-240_700_LT2_L_G2
	Declarations of conformity INOTEC- Conformity declaration AM06315_OTiDALI35_220-240_700_LT2_L_G2
	Declarations of conformity EATON(CEAG)-Conformity declaration AN00953 OTI DALI 35220-240700 LT2 L G2
	Declarations of conformity INOTEC-Conformity declaration AN00953 OTI DALI 35220-240700 LT2 L G2
	CAD data CAD data STEP OTI DALI 35,50LT2 L G2
	CAD data OTI DALI LT2L G2 IGS 060220
	CAD data OTI DALI LT2L G2 STEP 060220
	CAD Data 2-dim OTI DALI LT2L G2 CAD2PDF 060220
	CAD data 3-dim OTI DALI LT2L G2 CAD3PDF 060220
	CAD data PDF CAD data PDF OTI DALI 35,50LT2 L G2
	Product Datasheet Product datasheet OTI DALI 50 G2
	Declarations of conformity EATON(CEAG)-Conformity declaration AM06314_OTiDALI50_220-240_1A4_LT2_L_G2
	Declarations of conformity INOTEC- Conformity declaration AM06314_OTiDALI50_220-240_1A4_LT2_L_G2
	Declarations of conformity EATON(CEAG)-Conformity declaration AN00954 OTI DALI 50220-2401A4 LT2 L G2
	Declarations of conformity INOTEC-Conformity declaration AN00954 OTI DALI 50220-2401A4 LT2 L G2
	Product Datasheet 545691_Datasheet_OTi DALI 35_220-240_700 LT2 L
	Declarations of conformity EU Declaration of Conformity 3366462
	CAD data 3-dim 546351_OTi-DALI XX LT2 L
	User instruction OPTOTRONIC LED Power Supply
	Product Datasheet 491301_Datasheet_OTi DALI 80220-2401A6 LT2 L
	Certificates OT FIT OTI DALI LT2 CB DE1 63464 060520
	Certificates 489311_CB Certificate OTi DALI LT2 L
	Certificates 494640_CE Declaration OTi DALI linear

	Certificates OTI DALI 80 1A6 LT2 L INOTEC AM20234 270420
	CAD data OTI DALI 80 LT2 L IGS 270220
	CAD data OTI DALI 80 LT2 L STEP 270220
	CAD Data 2-dim OTI DALI 80 LT2 L CAD2PDF 270220
	CAD data 3-dim OTI DALI 80 LT2 L CAD3PDF 270220
	Product Datasheet 491386_Datasheet_OTi DALI 80220-2402A1 LT2 L
	User instruction OPTOTRONIC® LED Power Supply
	Product Datasheet 377041_OTi DALI 90220-240V1A0 LT2 L
	Product Datasheet OTi DALI 90220-2401A0 LT2 L
	Certificates 730563_VDE Certificate
	Certificates VDE ENEC Certificate 40038085
	Certificates 358995_CB Test Certificate OTi DALI 90220-2401A0 LT2 L
	Certificates OTI DALI OT FIT D LT2 L CB DE1 58970 040320
	Declarations of conformity 727247_EC OTi
	Declarations of conformity EU Declaration of Conformity 3667898
	Declarations of conformity EATON(CEAG)-Conformity declaration AM00141_OTiDALI90_220_240_1A0_D_LT2_L
	Declarations of conformity INOTEC- Conformity declaration AM00141_OTiDALI90_220_240_1A0_D_LT2_L
	Declarations of conformity EATON(CEAG)-Conformity declaration AN00952 OTI DALI 90220-2401A0 D LT2 L
	Declarations of conformity INOTEC-Conformity declaration AN00952 OTI DALI 90220-2401A0 D LT2 L
	CAD data 370051_CAD File OTi DALI 90220-2401A0 LT2 L
	CAD data 370053_CAD Daten OTi DALI 90220-2401A0 LT2 L
	CAD data 3-dim 370052_CAD Daten OTi DALI 90220-2401A0 LT2 L
	CAD data PDF 505460_CAD data OTi DALI 60220-240550 D LT2 L
	User instruction OPTOTRONIC LED Power Supply

	Product Datasheet OTi DALI 90220-240700 D LT2 L
	Declarations of conformity EATON(CEAG)-Conformity declaration AM00140_OTiDALI90_220_240_700_D_LT2_L
	Declarations of conformity INOTEC- Conformity declaration AM00140_OTiDALI90_220_240_700_D_LT2_L
	Declarations of conformity EATON(CEAG)-Conformity declaration AN00951 OTi DALI 90220-240700 D LT2 L
	Declarations of conformity INOTEC-Conformity declaration AN00951 OTi DALI 90220-240700 D LT2 L
	CAD data OTi DALI D LT2 L IGS 270220
	CAD data OTi DALI D LT2 L STEP 270220
	CAD Data 2-dim OTi DALI D LT2 L CAD2PDF 270220
	CAD data 3-dim OTi DALI D LT2 L CAD3PDF 270220
	Product Datasheet 730297_OTi DALI 60220-240550 D LT2 L
	Product Datasheet OTi DALI 60220-240550 D LT2 L
	Product Datasheet 601162_Data sheet OTi DALI 60
	Certificates 539639_CD Test Approval
	Declarations of conformity EATON(CEAG)-Conformity declaration AM00138_OTiDALI60_220_240_550_D_LT2_L
	Declarations of conformity INOTEC- Conformity declaration AM00138_OTiDALI60_220_240_550_D_LT2_L
	Declarations of conformity EATON(CEAG)-Conformity declaration AN00950 OTi DALI 60220-240550 D LT2 L
	Declarations of conformity INOTEC-Conformity declaration AN00950 OTi DALI 60220-240550 D LT2 L
	CAD data 3-dim 505454_CAD data OTi DALI 60220-240550 D LT2 L
	Product Datasheet 730296_OTi DALI 35220-240400 D LT2 L
	Product Datasheet OTi DALI 35220-240400 D LT2 L
	Declarations of conformity EATON(CEAG)-Conformity declaration AM00139_OTiDALI35_220_240_400_D_LT2_L
	Declarations of conformity INOTEC- Conformity declaration AM00139_OTiDALI35_220_240_400_D_LT2_L
	Declarations of conformity EATON(CEAG)-Conformity declaration AN00948 OTi DALI 35220-240400 D LT2 L
	Declarations of conformity INOTEC-Conformity declaration AN00948 OTi DALI 35220-240400 D LT2 L

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4052899551770	Shipping carton box 20	385 mm x 160 mm x 100 mm	5071.00 g	6.16 dm <sup>3</sup>
4052899551794	Shipping carton box 20	385 mm x 160 mm x 100 mm	5071.00 g	6.16 dm <sup>3</sup>
4052899245396	Shipping carton box 20	385 mm x 160 mm x 100 mm	5671.00 g	6.16 dm <sup>3</sup>
4052899028081	Shipping carton box 20	385 mm x 160 mm x 100 mm	5871.00 g	6.16 dm <sup>3</sup>
4052899028067	Shipping carton box 20	385 mm x 160 mm x 100 mm	5871.00 g	6.16 dm <sup>3</sup>
4052899494275	Shipping carton box 20	305 mm x 161 mm x 104 mm	4277.00 g	5.11 dm <sup>3</sup>
4052899494251	Shipping carton box 20	305 mm x 161 mm x 104 mm	4277.00 g	5.11 dm <sup>3</sup>
4052899494213	Shipping carton box 20	305 mm x 161 mm x 104 mm	4277.00 g	5.11 dm <sup>3</sup>
4052899494237	Shipping carton box 20	305 mm x 161 mm x 104 mm	4277.00 g	5.11 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.