

PRODUCT FAMILY DATASHEET

LED Retrofit CLASSIC P

LED lamps, classic mini-ball shape



AREAS OF APPLICATION

- Perfect for decorative installations
- General illumination
- Outdoor use in outdoor luminaires only (minimum IP65)
- Domestic applications

PRODUCT BENEFITS

- Very low energy consumption
- Lamps with innovative LED "filament" technology
- No UV and near-IR radiation in the light beam
- Instant 100 % light, no warm-up time
- Can be easily fitted instead of ordinary light bulbs
- Lower thermal output (compared with the standard reference product)
- Design, dimensions, luminous flux comparable to an incandescent or halogen lamp

PRODUCT FEATURES

- Professional LED lamps for line voltage
- Not dimmable
- Mercury-free lamps
- Beam angle: up to 300°
- Lifetime: up to 15,000 h



TECHNICAL DATA

Product description	Electrical data				Photometrical data				
	Nominal wattage	Nominal voltage	Max. lamp no. on circuit break. 10 A (B)	Max. lamp no. on circuit break. 16 A (B)	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature	Luminous flux	Color rendering index Ra
ST CLAS P 15 1.5 W/2700K E14 ¹⁾	1.50 W	220...240 V	416	666	0.70	Warm White	2700 K	136 lm	≥80
ST CLAS P 15 FR 1.5 W/2700K E27 ¹⁾	1.50 W	220...240 V	416	666	0.70	Warm White	2700 K	136 lm	≥80
RF CLAS P 15 CL 1.5 W/2700K E14 ¹⁾	1.50 W	220...240 V	416	666	0.70	Warm White	2700 K	136 lm	≥80
RF CLAS P 15 CL 1.5 W/2700K E27 ¹⁾	1.50 W	220...240 V	416	666	0.70	Warm White	2700 K	136 lm	≥80
ST CLAS P 25 2.5 W/2700K E14 ¹⁾	2.50 W	220...240 V	263	421	0.70	Warm White	2700 K	250 lm	≥80
ST CLAS P 25 2.8 W/2700K E14 ¹⁾	2.80 W	220...240 V	263	421	0.70	Warm White	2700 K	250 lm	≥80
ST CLAS P 25 FR 2.5 W/2700K B22d ¹⁾	2.50 W	220...240 V	263	421	0.70	Warm White	2700 K	250 lm	≥80
RF CLAS P 25 CL 2.5 W/2700K E27 ¹⁾	2.50 W	220...240 V	263	421	0.70	Warm White	2700 K	250 lm	≥80
ST CLAS P 25 FR 2.5 W/2700K E14 ¹⁾	2.50 W	220...240 V	263	421	0.70	Warm White	2700 K	250 lm	≥80
RF CLAS P 25 CL 2.5 W/2700K B22d ¹⁾	2.50 W	220...240 V	263	421	0.70	Warm White	2700 K	250 lm	≥80
ST CLAS P 25 2.5 W/2700K E27 ¹⁾	2.50 W	220...240 V	263	421	0.70	Warm White	2700 K	250 lm	≥80
ST CLAS P 25 2.5 W/4000K E14 ¹⁾	2.50 W	220...240 V	263	421	0.70	Cool White	4000 K	250 lm	≥80
ST CLAS P 25 2.5 W/4000K E27 ¹⁾	2.50 W	220...240 V	263	421	0.70	Cool White	4000 K	250 lm	≥80
ST CLAS P 25 FR 2.5 W/4000K E14 ¹⁾	2.50 W	220...240 V	263	421	0.70	Cool White	4000 K	250 lm	≥80
ST CLAS P 25 FR 2.8 W/2700K E14 ¹⁾	2.80 W	220...240 V	263	421	0.70	Warm White	2700 K	250 lm	≥80
ST CLAS P 25 2.5 W/2700K E27 ¹⁾	2.50 W	220...240 V	263	421	0.70	Warm White	2700 K	250 lm	≥80
ST CLAS P 40 CL 4 W/2700K E14 ¹⁾	4.00 W	220...240 V	156	250	0.70	Warm White	2700 K	470 lm	≥80
ST CLAS P 40 4 W/2700K E27 ¹⁾	4.00 W	220...240 V	156	250	0.70	Warm White	2700 K	470 lm	≥80
RF CLAS P 40 4 W/2700K E27 ¹⁾	4.00 W	220...240 V	510	817	0.70	Warm White	2700 K	470 lm	≥80
ST CLAS P 40 FR 4 W/2700K B22d ¹⁾	4.00 W	220...240 V	156	250	0.70	Warm White	2700 K	470 lm	≥80
RF CLAS P 40 4 W/2700K E14 ¹⁾	4.00 W	220...240 V	156	250	0.70	Warm White	2700 K	470 lm	≥80
ST CLAS P 40 4 W/2700K B22d ¹⁾	4.00 W	220...240 V	156	250	0.70	Warm White	2700 K	470 lm	≥80
ST CLAS P 40 4 W/4000K E14 ¹⁾	4.00 W	220...240 V	156	250	0.70	Cool White	4000 K	470 lm	≥80
ST CLAS P 40 4 W/4000K E14 ¹⁾	4.00 W	220...240 V	156	250	0.70	Cool White	4000 K	470 lm	≥80
ST CLAS P 40 4 W/4000K E14 ¹⁾	4.00 W	220...240 V	156	250	0.70	Cool White	4000 K	470 lm	≥80
ST CLAS P 40 4 W/4000K E27 ¹⁾	4.00 W	220...240 V	156	250	0.70	Cool White	4000 K	470 lm	≥80

Product description	Electrical data				Photometrical data				
	Nominal wattage	Nominal voltage	Max. lamp no. on circuit break. 10 A (B)	Max. lamp no. on circuit break. 16 A (B)	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature	Luminous flux	Color rendering index Ra
ST CLAS P 40 FR 4 W/4000K E27 ¹⁾	4.00 W	220...240 V	156	250	0.70	Cool White	4000 K	470 lm	≥80
ST CLAS P 40 4 W/2700K E27 ¹⁾	4.00 W	220...240 V	510	817	0.70	Warm White	2700 K	470 lm	≥80
RF CLAS P 40 4 W/2700K E14 ¹⁾	4.00 W	220...240 V	156	250	0.70	Warm White	2700 K	470 lm	≥80
ST CLAS P 40 4.5 W/6500K E14 ¹⁾	4.50 W	220...240 V	156	250	0.70	Cool Daylight	6500 K	470 lm	≥80
ST CLAS P 60 7 W/2700K E27 ¹⁾	7.00 W	220...240 V	589	943	0.70	Warm White	2700 K	806 lm	≥80
ST CLAS P 60 6.5 W/2700K E14 ¹⁾	6.50 W	220...240 V	589	943	0.70	Warm White	2700 K	806 lm	≥80
ST CLAS P 60 6.5 W/2700K E14 ¹⁾	6.50 W	220...240 V	589	943	0.70	Warm White	2700 K	806 lm	≥80
ST CLAS P 60 FR 7 W/2700K E27 ¹⁾	7.00 W	220...240 V	589	943	0.70	Warm White	2700 K	806 lm	≥80





Product description	Light technical data		Dimensions & weight	Temperatures & operating conditions	Lifespan		Additional product data	
	Warm-up time (60 %)	Starting time	Overall length	Ambient temperature range	Nominal lamp life time	Number of switching cycles	Base (standard designation)	Mercury-free
ST CLAS P 15 1.5 W/2700K E14 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 15 FR 1.5 W/2700K E27 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E27	Yes
RF CLAS P 15 CL 1.5 W/2700K E14 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
RF CLAS P 15 CL 1.5 W/2700K E27 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E27	Yes
ST CLAS P 25 2.5 W/2700K E14 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 25 2.8 W/2700K E14 ¹⁾	< 0.50 s	< 0.5 s	78.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 25 FR 2.5 W/2700K B22d ¹⁾	< 0.50 s	< 0.5 s	76.0 mm	-20...+40 °C	15000 h	100000	B22d	Yes
RF CLAS P 25 CL 2.5 W/2700K E27 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E27	Yes
ST CLAS P 25 FR 2.5 W/2700K E14 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
RF CLAS P 25 CL 2.5 W/2700K B22d ¹⁾	< 0.50 s	< 0.5 s	76.0 mm	-20...+40 °C	15000 h	100000	B22d	Yes
ST CLAS P 25 2.5 W/2700K E27 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E27	Yes
ST CLAS P 25 2.5 W/4000K E14 ¹⁾	< 0.50 s	< 0.5 s	78.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 25 2.5 W/4000K E27 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E27	Yes
ST CLAS P 25 FR 2.5 W/4000K E14 ¹⁾	< 0.50 s	< 0.5 s	78.0 mm	-20...+40 °C	15000 h	100000	E14	Yes

Product description	Light technical data		Dimensions & weight	Temperatures & operating conditions	Lifespan		Additional product data	
	Warm-up time (60 %)	Starting time	Overall length	Ambient temperature range	Nominal lamp life time	Number of switching cycles	Base (standard designation)	Mercury-free
ST CLAS P 25 FR 2.8 W/2700K E14 ¹⁾	< 0.50 s	< 0.5 s	78.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 25 2.5 W/2700K E27 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E27	Yes
ST CLAS P 40 CL 4 W/2700K E14 ¹⁾	< 0.50 s	< 0.5 s	78.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 40 4 W/2700K E27 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E27	Yes
RF CLAS P 40 4 W/2700K E27 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E27	Yes
ST CLAS P 40 FR 4 W/2700K B22d ¹⁾	< 0.50 s	< 0.5 s	76.0 mm	-20...+40 °C	15000 h	100000	B22d	Yes
RF CLAS P 40 4 W/2700K E14 ¹⁾	< 0.50 s	< 0.5 s	78.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 40 4 W/2700K B22d ¹⁾	< 0.50 s	< 0.5 s	76.0 mm	-20...+40 °C	15000 h	100000	B22d	Yes
ST CLAS P 40 4 W/4000K E14 ¹⁾	< 0.50 s	< 0.5 s	78.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 40 4 W/4000K E14 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 40 4 W/4000K E14 ¹⁾	< 0.50 s	< 0.5 s	78.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 40 4 W/4000K E27 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E27	Yes
ST CLAS P 40 FR 4 W/4000K E27 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E27	Yes
ST CLAS P 40 4 W/2700K E27 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E27	Yes
RF CLAS P 40 4 W/2700K E14 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 40 4.5 W/6500K E14 ¹⁾	< 0.50 s	< 0.5 s	78.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 60 7 W/2700K E27 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E27	Yes
ST CLAS P 60 6.5 W/2700K E14 ¹⁾	< 0.50 s	< 0.5 s	78.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 60 6.5 W/2700K E14 ¹⁾	< 0.50 s	< 0.5 s	78.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 60 FR 7 W/2700K E27 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E27	Yes

Product description	Capabilities	Certificates & standards		Country-specific categorizations
	Dimmable	Energy efficiency class	Energy consumption	ILCOS
ST CLAS P 15 1.5 W/2700K E14 ¹⁾	No	A++	2 kWh/1000h	
ST CLAS P 15 FR 1.5 W/2700K E27 ¹⁾	No	A++	2 kWh/1000h	
RF CLAS P 15 CL 1.5 W/2700K E14 ¹⁾	No	A++	2 kWh/1000h	DRBP/C-1,3-827-220-240-E14-45
RF CLAS P 15 CL 1.5 W/2700K E27 ¹⁾	No	A++	2 kWh/1000h	DRBP/C-1,3-827-220-240-E27-45
ST CLAS P 25 2.5 W/2700K E14 ¹⁾	No	A++	3 kWh/1000h	

Product description	Capabilities	Certificates & standards		Country-specific categorizations
	Dimmable	Energy efficiency class	Energy consumption	ILCOS
ST CLAS P 25 2.8 W/2700K E14 ¹⁾	No	A++	3 kWh/1000h	
ST CLAS P 25 FR 2.5 W/2700K B22d ¹⁾	No	A++	3 kWh/1000h	
RF CLAS P 25 CL 2.5 W/2700K E27 ¹⁾	No	A++	3 kWh/1000h	DRBP/C-2-230-E27-45/84
ST CLAS P 25 FR 2.5 W/2700K E14 ¹⁾	No	A++	3 kWh/1000h	DRBP/F-2,8/827-220-240-E14-45
RF CLAS P 25 CL 2.5 W/2700K B22d ¹⁾	No	A++	3 kWh/1000h	DRBP/C-2,1/827-220/240-B22D-45
ST CLAS P 25 2.5 W/2700K E27 ¹⁾	No	A++	3 kWh/1000h	DRBP/F-2,8/827-220-240-E27-45
ST CLAS P 25 2.5 W/4000K E14 ¹⁾	No	A++	3 kWh/1000h	
ST CLAS P 25 2.5 W/4000K E27 ¹⁾	No	A++	3 kWh/1000h	
ST CLAS P 25 FR 2.5 W/4000K E14 ¹⁾	No	A++	3 kWh/1000h	
ST CLAS P 25 FR 2.8 W/2700K E14 ¹⁾	No	A++	3 kWh/1000h	DRBP/F-2,8/827-220-240-E14-45
ST CLAS P 25 2.5 W/2700K E27 ¹⁾	No	A++	3 kWh/1000h	DRBP/F-2,8/827-220-240-E27-45
ST CLAS P 40 CL 4 W/2700K E14 ¹⁾	No	A++	4 kWh/1000h	DRBP/C-4/827-220/240-E14-45
ST CLAS P 40 4 W/2700K E27 ¹⁾	No	A++	4 kWh/1000h	DRBP/C-4/827-220/240-E27-45
RF CLAS P 40 4 W/2700K E27 ¹⁾	No	A++	4 kWh/1000h	DRBP/F-5/827-220-240-E27-45
ST CLAS P 40 FR 4 W/2700K B22d ¹⁾	No	A++	4 kWh/1000h	DRBP/F-4/827-220-240-B22D-45
RF CLAS P 40 4 W/2700K E14 ¹⁾	No	A++	4 kWh/1000h	DRBP/F-4/827-220-240-E14-45
ST CLAS P 40 4 W/2700K B22d ¹⁾	No	A++	4 kWh/1000h	
ST CLAS P 40 4 W/4000K E14 ¹⁾	No	A++	5 kWh/1000h	DRBP/F-4/840-220-240-E14-45
ST CLAS P 40 4 W/4000K E14 ¹⁾	No	A++	4 kWh/1000h	
ST CLAS P 40 4 W/4000K E14 ¹⁾	No	A++	5 kWh/1000h	
ST CLAS P 40 4 W/4000K E27 ¹⁾	No	A++	4 kWh/1000h	
ST CLAS P 40 FR 4 W/4000K E27 ¹⁾	No	A++	4 kWh/1000h	
ST CLAS P 40 4 W/2700K E27 ¹⁾	No	A++	4 kWh/1000h	DRBP/C-4/827-220/240-E27-45
RF CLAS P 40 4 W/2700K E14 ¹⁾	No	A++	4 kWh/1000h	DRBP/F-4/827-220-240-E14-45
ST CLAS P 40 4.5 W/6500K E14 ¹⁾	No	A++	4 kWh/1000h	DRBP/C-4/865-220-240-E14-45
ST CLAS P 60 7 W/2700K E27 ¹⁾	No	A++	7 kWh/1000h	
ST CLAS P 60 6.5 W/2700K E14 ¹⁾	No	A++	7 kWh/1000h	
ST CLAS P 60 6.5 W/2700K E14 ¹⁾	No	A++	7 kWh/1000h	
ST CLAS P 60 FR 7 W/2700K E27 ¹⁾	No	A++	7 kWh/1000h	

1) All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

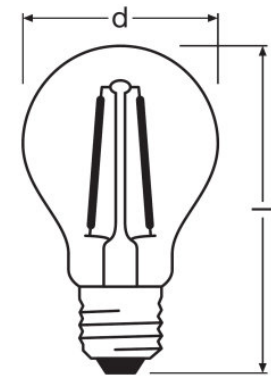
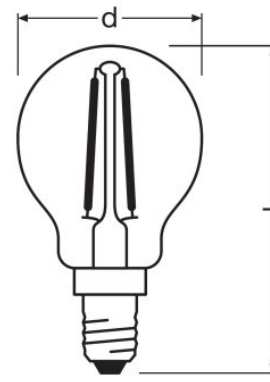
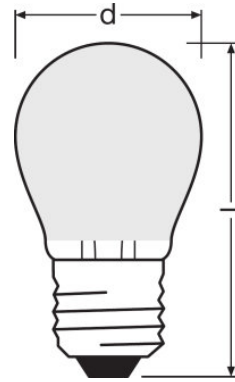
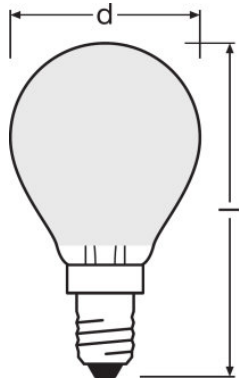


ST CLAS P 15 1.5 W/2700K E14, ST CLAS P 25 FR 2.5 W/2700K E14, ST CLAS P 25 FR 2.5 W/4000K E14, ST CLAS P 25 FR 2.8 W/2700K E14, RF CLAS P 40 4 W/2700K E14, ST CLAS P 40 4 W/4000K E14, RF CLAS P 40 4 W/2700K E14, ST CLAS P 40 4.5 W/6500K E14

ST CLAS P 15 FR 1.5 W/2700K E27, ST CLAS P 25 2.5 W/2700K E27, ST CLAS P 25 2.5 W/2700K E27, RF CLAS P 40 4 W/2700K E27, ST CLAS P 40 FR 4 W/4000K E27

RF CLAS P 15 CL 1.5 W/2700K E14, ST CLAS P 25 2.5 W/2700K E14, ST CLAS P 25 2.8 W/2700K E14, ST CLAS P 25 2.5 W/4000K E14

RF CLAS P 15 CL 1.5 W/2700K E27, RF CLAS P 25 CL 2.5 W/2700K E27, ST CLAS P 25 2.5 W/4000K E27, ST CLAS P 40 4 W/2700K E27, ST CLAS P 40 4 W/2700K E27

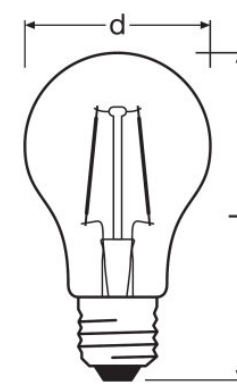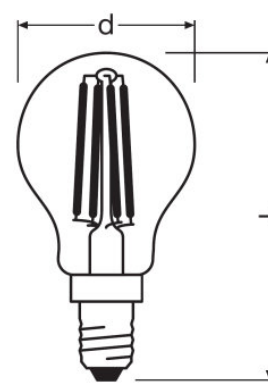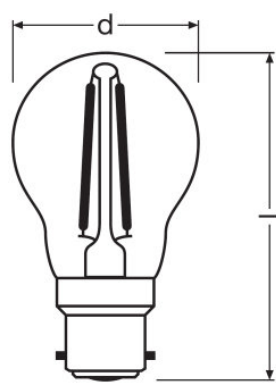
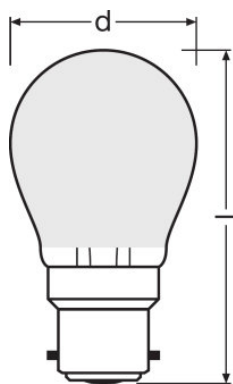


ST CLAS P 25 FR 2.5 W/2700K B22d, ST CLAS P 40 FR 4 W/2700K B22d

RF CLAS P 25 CL 2.5 W/2700K B22d, ST CLAS P 40 4 W/2700K B22d

ST CLAS P 40 CL 4 W/2700K E14, ST CLAS P 40 4 W/4000K E14, ST CLAS P 40 4 W/4000K E14, ST CLAS P 60 6.5 W/2700K E14

ST CLAS P 40 4 W/4000K E27, ST CLAS P 60 7 W/2700K E27

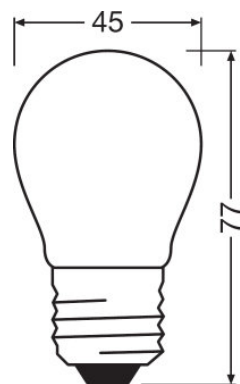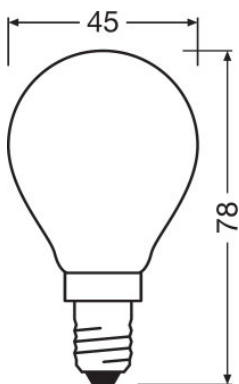

ST CLAS P 60 6.5 W/2700K E14

ST CLAS P 60 FR 7 W/2700K E27

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075108097	Shipping carton box 6	285 mm x 153 mm x 136 mm	286.00 g	5.93 dm ³
4058075108134	Shipping carton box 6	285 mm x 153 mm x 132 mm	327.00 g	5.76 dm ³
4052899400337	Shipping carton box 6	285 mm x 153 mm x 136 mm	284.00 g	5.93 dm ³
4052899400351	Shipping carton box 6	285 mm x 153 mm x 136 mm	312.00 g	5.93 dm ³
4052899936515	Shipping carton box 6	285 mm x 153 mm x 136 mm	292.00 g	5.93 dm ³
4058075116368	Shipping carton box 10	245 mm x 102 mm x 101 mm	281.00 g	2.52 dm ³
4058075111943	Shipping carton box 12	285 mm x 153 mm x 201 mm	498.00 g	8.76 dm ³
4058075116542	Shipping carton box 10	245 mm x 102 mm x 101 mm	353.00 g	2.52 dm ³
4052899941625	Shipping carton box 6	285 mm x 153 mm x 136 mm	322.00 g	5.93 dm ³
4058075115064	Shipping carton box 10	245 mm x 102 mm x 101 mm	324.00 g	2.52 dm ³
4052899936508	Shipping carton box 6	285 mm x 153 mm x 136 mm	292.00 g	5.93 dm ³
4058075116429	Shipping carton box 10	245 mm x 102 mm x 101 mm	313.00 g	2.52 dm ³
4058075289680	Shipping carton box 10	245 mm x 90 mm x 100 mm	632.00 g	2.21 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4052899963528	Shipping carton box 6	285 mm x 153 mm x 136 mm	340.00 g	5.93 dm ³
4058075116382	Shipping carton box 10	245 mm x 102 mm x 101 mm	310.00 g	2.52 dm ³
4058075810273	Shipping carton box 6	285 mm x 153 mm x 136 mm	317.00 g	5.93 dm ³
4058075111820	Shipping carton box 6	285 mm x 153 mm x 136 mm	288.00 g	5.93 dm ³
4058075111981	Shipping carton box 12	285 mm x 153 mm x 201 mm	498.00 g	8.76 dm ³
4058075111844	Shipping carton box 6	285 mm x 153 mm x 136 mm	312.00 g	5.93 dm ³
4058075112124	Shipping carton box 12	285 mm x 153 mm x 201 mm	498.00 g	8.76 dm ³
4058075116443	Shipping carton box 10	245 mm x 102 mm x 101 mm	270.00 g	2.52 dm ³
4058075112087	Shipping carton box 12	285 mm x 153 mm x 201 mm	498.00 g	8.76 dm ³
4058075115088	Shipping carton box 10	245 mm x 102 mm x 101 mm	330.00 g	2.52 dm ³
4052899941885	Shipping carton box 6	285 mm x 153 mm x 136 mm	303.00 g	5.93 dm ³
4058075112025	Shipping carton box 12	285 mm x 153 mm x 201 mm	498.00 g	8.76 dm ³
4058075116405	Shipping carton box 10	245 mm x 102 mm x 101 mm	323.00 g	2.52 dm ³
4058075330542	Shipping carton box 10	245 mm x 90 mm x 100 mm	632.00 g	2.21 dm ³
4058075234048	Shipping carton box 10	245 mm x 102 mm x 101 mm	373.00 g	2.52 dm ³
4052899959828	Shipping carton box 6	285 mm x 153 mm x 136 mm	320.00 g	5.93 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075112247	Shipping carton box 12	285 mm x 153 mm x 201 mm	546.00 g	8.76 dm ³
4058075115101	Shipping carton box 10	245 mm x 102 mm x 101 mm	340.00 g	2.52 dm ³
4058075153677	Shipping carton box 10	245 mm x 90 mm x 100 mm	662.00 g	2.21 dm ³
4058075115002	Shipping carton box 10	245 mm x 102 mm x 101 mm	340.00 g	2.52 dm ³
4058075810280	Shipping carton box 6	285 mm x 153 mm x 136 mm	324.00 g	5.93 dm ³
4058075112162	Shipping carton box 12	285 mm x 153 mm x 201 mm	498.00 g	8.76 dm ³
4058075116481	Shipping carton box 10	245 mm x 102 mm x 101 mm	323.00 g	2.52 dm ³
4058075132900	Shipping carton box 10	245 mm x 90 mm x 100 mm	612.00 g	2.21 dm ³
4058075116528	Shipping carton box 10	245 mm x 102 mm x 101 mm	353.00 g	2.52 dm ³
4058075112186	Shipping carton box 12	285 mm x 153 mm x 201 mm	498.00 g	8.76 dm ³
4058075116504	Shipping carton box 10	245 mm x 102 mm x 101 mm	323.00 g	2.52 dm ³
4058075810297	Shipping carton box 6	285 mm x 153 mm x 136 mm	309.00 g	5.93 dm ³
4058075111868	Shipping carton box 6	285 mm x 153 mm x 136 mm	288.00 g	5.93 dm ³
4058075112049	Shipping carton box 12	285 mm x 153 mm x 201 mm	498.00 g	8.76 dm ³
4058075111882	Shipping carton box 6	285 mm x 153 mm x 136 mm	312.00 g	5.93 dm ³
4058075108233	Shipping carton box 6	285 mm x 153 mm x 136 mm	310.00 g	5.93 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4052899962293	Shipping carton box 6	285 mm x 153 mm x 136 mm	330.00 g	5.93 dm ³
4052899959767	Shipping carton box 6	285 mm x 153 mm x 136 mm	309.00 g	5.93 dm ³
4058075815209	Shipping carton box 6	285 mm x 153 mm x 136 mm	316.00 g	5.93 dm ³
4058075108417	Shipping carton box 6	285 mm x 153 mm x 136 mm	330.00 g	5.93 dm ³
4058075108271	Shipping carton box 6	285 mm x 153 mm x 132 mm	292.00 g	5.76 dm ³
4058075233720	Shipping carton box 10	245 mm x 102 mm x 101 mm	303.00 g	2.52 dm ³
4058075108295	Shipping carton box 6	285 mm x 153 mm x 132 mm	295.00 g	5.76 dm ³
4058075233980	Shipping carton box 10	245 mm x 102 mm x 101 mm	303.00 g	2.52 dm ³
4058075108394	Shipping carton box 6	285 mm x 153 mm x 132 mm	339.00 g	5.76 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.