

# PRODUCT DATASHEET

## D STICK 11 W/2700K 220...240 V E14

OSRAM DULUX STICK | Compact fluorescent integrated, stick shape



---

### AREAS OF APPLICATION

- High-quality domestic and professional environments
- General illumination
- Outdoor use in enclosed and ventilated luminaires only

---

### PRODUCT BENEFITS

- Excellent price/performance ratio
- Great variety of light colors

---

### PRODUCT FEATURES

- Good quality of light; color rendering index  $R_a: \geq 80$ ; constant chromaticity
- Average life: 10,000 h



## TECHNICAL DATA


### Electrical data

Rated wattage	11.00 W
Nominal voltage	220...240 V
Nominal wattage	11.00 W
Operating frequency	50...60 Hz

### Photometrical data

Nominal luminous flux	620 lm
Rated luminous flux	620 lm
Rated color temperature	2700 K
Light color	827
Light color (designation)	Warm White
Color temperature	2700 K
Luminous flux	620 lm
Color rendering index Ra	≥80
Color rendering group	1B

### Dimensions & weight



Maximum diameter	41.0 mm
Overall length	126.0 mm
Product weight	53.00 g
Length	126.0 mm

### Temperatures & operating conditions

Ambient temperature range	-10...+50 °C
---------------------------	--------------

### Lifespan

Nominal lamp life time	10000 h
------------------------	---------

<b>Rated lamp life time</b>	10000 h
-----------------------------	---------

Additional product data

<b>Base (standard designation)</b>	E14
<b>Mercury content</b>	2.0 mg
<b>Show WEEE picto</b>	Yes

Capabilities

<b>Dimmable</b>	No
-----------------	----


Certificates & standards

<b>Energy consumption</b>	11 kWh/1000h
<b>Energy efficiency class</b>	A
<b>Cleaning instruction in case of breakage</b>	What to do if a lamp containing mercury breaks?

Country-specific categorizations

<b>ILCOS</b>	FBT-11/827-220/240-E14
--------------	------------------------

Light Distribution

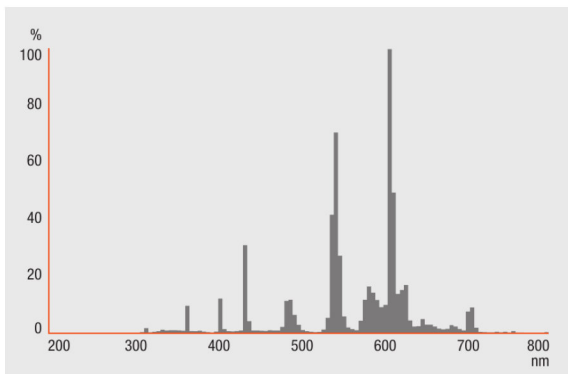

Spectral power distribution

---

**SAFETY ADVICE**

In case of lamp breakage: [www.ledvance.com/brokenlamp](http://www.ledvance.com/brokenlamp)  
Not for use with external dimmers or electronic switches.

---

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4008321989727	Blister 1	185 mm x 48 mm x 78 mm	78.00 g	0.69 dm <sup>3</sup>
4008321989994	Shipping carton box 8	196 mm x 200 mm x 154 mm	716.00 g	6.04 dm <sup>3</sup>
4008321989840	Folding carton box 1	134 mm x 47 mm x 47 mm	80.00 g	0.30 dm <sup>3</sup>
4008321990112	Shipping carton box 10	244 mm x 145 mm x 99 mm	829.33 g	3.50 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.