

# PRODUCT DATASHEET

## ST R63 40 36° 2.6 W/2700K E27

LED STAR R63 | LED reflector lamps R63 with retrofit screw base



---

### AREAS OF APPLICATION

- Display cabinets and shop windows
- Museums, art galleries
- Hospitality
- Residential interiors
- As a downlight for marking walkways, doors, stairs, etc.
- Outdoor applications only in suitable luminaires

---

### PRODUCT BENEFITS

- Long lifetime of up to 15,000 h
- Low energy consumption
- Easy replacement of halogen lamps thanks to compact design
- Instant 100 % light, no warm-up time

---

### PRODUCT FEATURES

- Professional LED alternative to halogen lamps
- Mercury-free lamps



## TECHNICAL DATA

### Electrical data

Rated wattage	2.60 W
Nominal wattage	2.60 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	40 W
Max. lamp no. on circuit break. 10 A (B)	300
Max. lamp no. on circuit break. 16 A (B)	400
Operating frequency	50...60 Hz
Power factor $\lambda$	0.53


### Photometrical data

Nominal luminous flux	210 lm
Rated luminous flux	210 lm
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Luminous flux	210 lm
Color rendering index Ra	$\geq 80$
Standard deviation of color matching	$\leq 6$ sdc <sub>m</sub>
Rated color temperature	2700 K
Color rendering index Ra	$\geq 80$
Nominal useful luminous flux 90°	210 lm
Rated useful luminous flux 90°	210 lm
Rated peak intensity	450 cd

### Light technical data

Beam angle	36 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s
Nominal beam angle	36 °
Rated beam angle (half peak value)	36.00 °

### Dimensions & weight

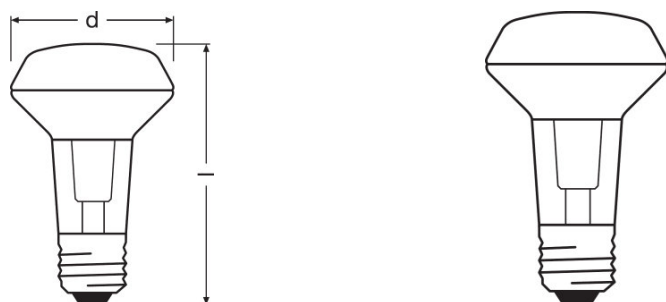

<b>Overall length</b>	102.0 mm
<b>Diameter</b>	63.0 mm
<b>Outer bulb</b>	R63
<b>Length</b>	102.0 mm
<b>Maximum diameter</b>	63.0 mm

### Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...+40 °C
<b>Maximum temperature at tc test point</b>	70 °C

### Lifespan

<b>Nominal lamp life time</b>	15000 h
<b>Rated lamp life time</b>	15000 h
<b>Number of switching cycles</b>	100000

### Additional product data

<b>Base (standard designation)</b>	E27
<b>Mercury content</b>	0.0 mg
<b>Mercury-free</b>	Yes
<b>Show WEEE picto</b>	Yes
<b>Product remark</b>	All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

### Capabilities

<b>Dimmable</b>	No
-----------------	----

### Certificates & standards

<b>Energy efficiency class</b>	A++
<b>Energy consumption</b>	3 kWh/1000h

## Country-specific categorizations

<b>Order reference</b>	LEDSR6340 2,6W/
------------------------	-----------------

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075096967	Blister 1	65 mm x 140 mm x 120 mm	117.00 g	1.09 dm <sup>3</sup>
4058075096974	Shipping carton box 6	410 mm x 154 mm x 134 mm	850.00 g	8.46 dm <sup>3</sup>
4058075096981	Folding carton box 2	112 mm x 67 mm x 110 mm	241.00 g	0.83 dm <sup>3</sup>
4058075096998	Shipping carton box 20	345 mm x 234 mm x 126 mm	2686.00 g	10.17 dm <sup>3</sup>
4058075451827	Shipping carton box 10	340 mm x 143 mm x 120 mm	1268.00 g	5.83 dm <sup>3</sup>
4058075125964	Folding carton box 1	65 mm x 65 mm x 107 mm	119.00 g	0.45 dm <sup>3</sup>
4058075125971	Shipping carton box 10	345 mm x 142 mm x 116 mm	1403.00 g	5.68 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## REFERENCES / LINKS

For further products and actual information concerning LED lamps see

▶ [www.ledvance.com/ledlamps](http://www.ledvance.com/ledlamps)

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.