

PRODUCT FAMILY DATASHEET

LED SUPERSTAR PAR20

Dimmable LED reflector lamps PAR20 with retrofit screw base



AREAS OF APPLICATION

- Display cabinets and shop windows
- Museums, art galleries
- Exhibition rooms
- Hospitality
- Residential interiors
- As a downlight for marking walkways, doors, stairs, etc.
- Outdoor applications only in suitable luminaires

PRODUCT BENEFITS

- Very long lifetime of up to 25,000 h
- Low energy consumption
- Easy replacement of halogen lamps thanks to compact design
- Instant 100 % light, no warm-up time

PRODUCT FEATURES

- Good color rendering index $R_a \geq 80$
- Dimmable (with many common dimmers, see also www.ledvance.com/dim)
- Mercury-free lamps





TECHNICAL DATA

Product description	Electrical data					Photometrical data			
	Nominal wattage	Nominal voltage	Claimed equiv. conventional lamp power	Max. lamp no. on circuit break. 10 A (B)	Max. lamp no. on circuit break. 16 A (B)	Nominal luminous flux	Rated luminous flux	Lumen main.fact.at end of nom.life time	Light color (designation)
SST PAR 20 50 36° DIM 5 W/2700K E27 ¹⁾	5.00 W	220...240 V	50 W	143	230	345 lm	345 lm	0.70	Warm White
SST PAR 20 50 36° 5 W/2700K E27 ¹⁾	5.00 W	220...240 V	50 W	140	200	345 lm	345 lm	0.70	Warm White

Product description	Color temperature	Luminous flux	Color rendering index Ra	Light technical data	Dimensions & weight		Temperatures & operating conditions	Lifespan	
				Warm-up time (60 %)	Overall length	Diameter	Ambient temperature range	Nominal lamp life time	Number of switching cycles
SST PAR 20 50 36° DIM 5 W/2700K E27 ¹⁾	2700 K	345 lm	≥80	< 0.50 s	88.0 mm	64.0 mm	-20...+40 °C	25000 h	100000
SST PAR 20 50 36° 5 W/2700K E27 ¹⁾	2700 K	345 lm	≥90	< 0.50 s	78.0 mm	63.0 mm	-20...+40 °C	25000 h	100000

Product description	Additional product data		Capabilities	Certificates & standards		Country-specific categorizations
	Base (standard designation)	Mercury-free	Dimmable	Energy efficiency class	Energy consumption	ILCOS
SST PAR 20 50 36° DIM 5 W/2700K E27 ¹⁾	E27	Yes	Yes	A+	5 kWh/1000h	DRPAR-5/827-220-240-E27-63/36
SST PAR 20 50 36° 5 W/2700K E27 ¹⁾	E27	Yes	Yes	A+	5 kWh/1000h	

¹⁾ All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

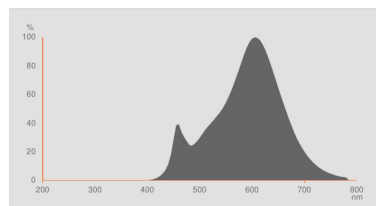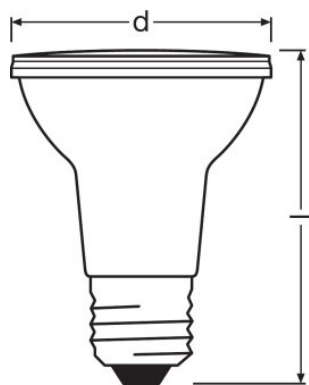

SST PAR 20 50 36° DIM 5 W/2700K E27,
SST PAR 20 50 36° 5 W/2700K E27

SST PAR 20 50 36° DIM 5 W/2700K E27

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075813229	Shipping carton box 6	410 mm x 154 mm x 134 mm	945.00 g	8.46 dm ³
4058075264298	Shipping carton box 6	410 mm x 154 mm x 134 mm	870.00 g	8.46 dm ³
4058075433137	Shipping carton box 10	322 mm x 134 mm x 106 mm	1317.00 g	4.57 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For dimming conformity see

- ▶ www.ledvance.com/dim

For further products and actual information concerning LED lamps see

- ▶ www.ledvance.com/ledlamps

For Guarantee see

- ▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.