

# PRODUCT FAMILY DATASHEET

## SubstiTUBE Start

Starter for SubstiTUBE EM (CCG)



---

### AREAS OF APPLICATION

- Not suitable for operation with electronic control gears

---

### PRODUCT BENEFITS

- Extremely break resistant thanks to cover made of polycarbonate
- Mercury-free and RoHS compliant

---


### PRODUCT FEATURES

- Substitute starter for the replacement of a fluorescent lamp with a LED tube
- Suitable for operation with low loss or conventional control gear or line voltage
- Integrated electrical fuse



**TECHNICAL DATA**

	Electrical data	Dimensions & weight
<b>Product description</b>	<b>Operating frequency</b>	<b>Product weight</b>
LED T8 Starter	-	5.00 g

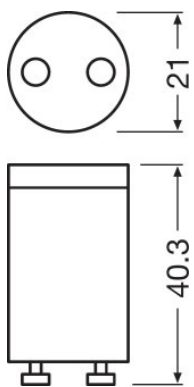

LED T8 Starter

**APPLICATION ADVICE**

For more detailed application information and graphics please see product datasheet.

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075013681	Shipping carton box 20	99 mm x 32 mm x 218 mm	169.00 g	0.69 dm <sup>3</sup>

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
--------------	------------------------------	--------------------------------------	--------------	--------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.