

# PRODUCT DATASHEET

## DULUX D LED EM & AC Mains 13.5 W/3000K G24d-1

OSRAM DULUX D LED EM & AC MAINS | LED replacement for CFLni, 2 tubes, with 2-pin G24d base for CCG and AC mains operation



### AREAS OF APPLICATION

- General illumination within ambient temperatures from -20...+35 °C
- Supermarkets and department stores
- Walkways and corridors
- Hotels, restaurants
- Outdoor applications only in suitable luminaires

### PRODUCT BENEFITS

- LED replacement for conventional compact fluorescent lamps for use in CCG luminaires or on AC mains
- Quick, simple and safe replacement without rewiring
- Rotatable base around its longitudinal axis ( $\pm 90^\circ$ )
- Low energy consumption
- Easy relamping thanks to compact design

### PRODUCT FEATURES

- Type of protection: IP20
- Lifetime: up to 30,000 h
- Single-ended two-pin plug-in G24d base



## TECHNICAL DATA

### Electrical data

Rated wattage	5.00 W
Nominal wattage	5.00 W
Nominal voltage	220...240 V
Max. lamp no. on circuit break. 10 A (B)	270
Max. lamp no. on circuit break. B10 A - CCG without compensation	270
Max. lamp no. on circuit break. B10 A - CCG with compensation	270
Max. lamp no. on circuit break. B16 A - CCG without compensation	440
Max. lamp no. on circuit break. B16 A - CCG with compensation	440
Max. lamp no. on circuit break. 16 A (B)	440
Operating frequency	50/60 Hz
Inrush current	10.0 A
Power factor $\lambda$	> 0.70


### Photometrical data

Nominal luminous flux	550 lm
Rated luminous flux	550 lm
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	3000 K
Luminous flux	550 lm
Color rendering index Ra	$\geq 80$
Standard deviation of color matching	$\leq 6$ sdc <sub>m</sub>
Rated color temperature	3000 K
Color rendering index Ra	$\geq 80$

### Light technical data

Warm-up time (60 %)	< 0.50 s
Beam angle	120 °
Starting time	< 0.5 s

## Dimensions & weight



<b>Overall length</b>	148.0 mm
<b>Diameter</b>	35.0 mm
<b>Outer bulb</b>	-
<b>Length</b>	148.0 mm

## Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...+35 °C
<b>Maximum temperature at tc test point</b>	85 °C

## Lifespan

<b>Nominal lamp life time</b>	30000 h
<b>Rated lamp life time</b>	30000 h
<b>Number of switching cycles</b>	200000
<b>Lumen maintenance at end of service life</b>	0.70

## Additional product data

<b>Base (standard designation)</b>	G24d-1
<b>Mercury content</b>	0.0 mg
<b>Mercury-free</b>	Yes
<b>Design / version</b>	Frosted
<b>Show WEEE picto</b>	Yes

## Capabilities

<b>Dimmable</b>	No
-----------------	----


## Certificates & standards

<b>Energy efficiency class</b>	A++
<b>Energy consumption</b>	5 kWh/1000h

Country-specific categorizations

<b>Order reference</b>	DULUX D13LED 5W
------------------------	-----------------

Light Distribution

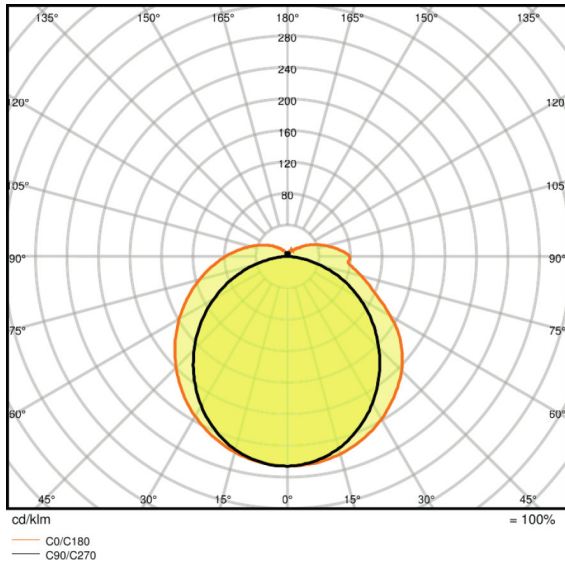

— LDC typ polar

**SAFETY ADVICE**

Only suitable for temperatures of up to 35°C inside of the luminaire.  
Not suitable for tandem operation.

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075135086	Folding carton box 1	37 mm x 37 mm x 151 mm	78.00 g	0.21 dm <sup>3</sup>
4058075135093	Shipping carton box 10	205 mm x 91 mm x 180 mm	843.00 g	3.36 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.