

PRODUCT FAMILY DATASHEET

PARATHOM MOTION SENSOR CLASSIC A

Special LED lamps with motion sensor, classic bulb shape



AREAS OF APPLICATION

- For indoor use only

PRODUCT BENEFITS

- Short payback period thanks to low energy consumption and maintenance costs
- Energy-saving lighting solution thanks to automatic switch off at daylight
- Very long lifetime of up to 25,000 h
- Automatic light switch off 15 seconds after the last motion detection
- Illumination threshold for automatic switching: 10 lx
- Low energy consumption
- Easy replacement of classic lamps thanks to compact design
- Instant 100 % light, no warm-up time

PRODUCT FEATURES

- LED alternative to conventional lamps
- High color consistency: ≤ 6 SDCM
- Mercury-free lamps





TECHNICAL DATA

Product description	Electrical data		Photometrical data					Dimensions & weight	Temperatures & operating conditions
	Nominal wattage	Nominal voltage	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature	Luminous flux	Color rendering index Ra	Overall length	Ambient temperature range
P CLAS A 60 9 W/2700K E27 ¹⁾	9.00 W	220...240 V	0.70	Warm White	2700 K	806 lm	≥80	116.0 mm	-20...+40 °C
P CLAS A 75 11.5 W/2700K E27 ¹⁾	11.50 W	220...240 V	0.70	Warm White	2700 K	1060 lm	≥80	126.0 mm	-20...+40 °C

Product description	Lifespan		Additional product data		Capabilities	Certificates & standards	Country-specific categorizations
	Nominal lamp life time	Number of switching cycles	Base (standard designation)	Mercury-free	Dimmable	Energy efficiency class	ILCOS
P CLAS A 60 9 W/2700K E27 ¹⁾	25000 h	100000	E27	Yes	No	A+	DRAA/F-9/827-220-240-E27-60
P CLAS A 75 11.5 W/2700K E27 ¹⁾	25000 h	100000	E27	Yes	No	A+	DRAA/F-11,5/827-220-240-E27-60

¹⁾ All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

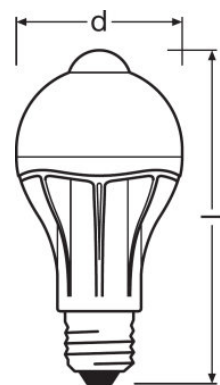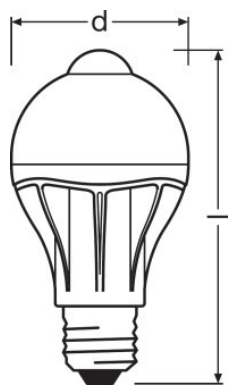

P CLAS A 60 9 W/2700K E27

P CLAS A 75 11.5 W/2700K E27

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075815728	Shipping carton box 10	318 mm x 133 mm x 134 mm	1128.00 g	5.67 dm ³
4058075815704	Shipping carton box 10	327 mm x 136 mm x 141 mm	1068.00 g	6.27 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.