

PRODUCT FAMILY DATASHEET

LED Retrofit CLASSIC P Mirror

LED lamps, classic mini-ball shape with mirror bulb crown



AREAS OF APPLICATION

- General illumination
- Mirror lighting
- Outdoor use in outdoor luminaires only (minimum IP65)

PRODUCT BENEFITS

- Long lifetime of up to 15,000 h
- Low energy consumption
- Easy relamping thanks to compact design
- Instant 100 % light, no warm-up time
- Lamps with innovative LED "filament" technology

PRODUCT FEATURES

- Bulb crown coating: gold or silver
- Mercury-free lamps





TECHNICAL DATA

Product description	Electrical data				Photometrical data				
	Nominal wattage	Nominal voltage	Max. lamp no. on circuit break. 10 A (B)	Max. lamp no. on circuit break. 16 A (B)	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature	Luminous flux	Color rendering index Ra
ST CLAS P 37 CL 4 W/2700K E14 ¹⁾	4.00 W	220...240 V	65	100	0.70	Warm White	2700 K	420 lm	≥80
ST CLAS P 34 4 W/2700K E14 ¹⁾	4.00 W	220...240 V	140	200	0.70	Warm White	2700 K	380 lm	≥80
ST CLAS P 31 CL 4 W/2700K E14 ¹⁾	4.00 W	220...240 V	156	250	0.70	Warm White	2700 K	350 lm	≥80

Product description	Light technical data		Dimensions & weight	Temperatures & operating conditions	Lifespan		Additional product data	
	Warm-up time (60 %)	Starting time	Overall length	Ambient temperature range	Nominal lamp life time	Number of switching cycles	Base (standard designation)	Mercury-free
ST CLAS P 37 CL 4 W/2700K E14 ¹⁾	< 0.50 s	< 0.5 s	78.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 34 4 W/2700K E14 ¹⁾	< 0.50 s	< 0.5 s	78.0 mm	-20...+40 °C	15000 h	100000	E14	Yes
ST CLAS P 31 CL 4 W/2700K E14 ¹⁾	< 0.50 s	< 0.5 s	77.0 mm	-20...+40 °C	15000 h	100000	E14	Yes

Product description	Capabilities	Certificates & standards		Country-specific categorizations
	Dimmable	Energy efficiency class	Energy consumption	ILCOS
ST CLAS P 37 CL 4 W/2700K E14 ¹⁾	No	A++	4 kWh/1000h	
ST CLAS P 34 4 W/2700K E14 ¹⁾	No	A+	4 kWh/1000h	
ST CLAS P 31 CL 4 W/2700K E14 ¹⁾	No	A+	4 kWh/1000h	DRBP/C-4/827-220/240-E14-45

¹⁾ All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

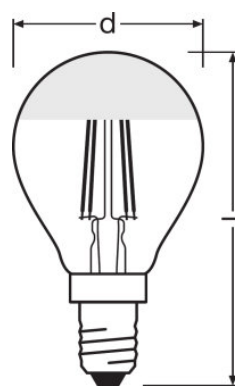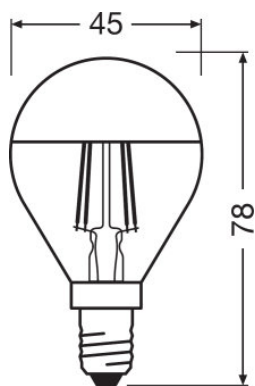

ST CLAS P 37 CL 4 W/2700K E14

ST CLAS P 34 4 W/2700K E14, ST CLAS P 31 CL 4 W/2700K E14

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075114647	Shipping carton box 6	285 mm x 153 mm x 136 mm	282.00 g	5.93 dm ³
4058075456556	Shipping carton box 10	251 mm x 111 mm x 106 mm	340.00 g	2.95 dm ³
4058075810433	Shipping carton box 6	285 mm x 153 mm x 136 mm	292.00 g	5.93 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.