

PRODUCT FAMILY DATASHEET

SPOT ADJUST DALI

Recessed mounted spotlight, adjustable, round shape with DALI driver



AREAS OF APPLICATION

- Replacement of halogen lamp spotlights
- General illumination
- Hotel rooms
- Bars, restaurants
- Accent lighting
- Galleries, museums
- Residential interiors

PRODUCT BENEFITS

- Advanced functionality due to already included DALI driver
- DALI driver with individual luminaire current set-up already installed
- High luminous efficacy
- Design matches the LEDVANCE DOWNLIGHT luminaire family
- Energy savings of up to 90 % compared to halogen lamp spotlights
- Functional and minimalistic design
- Easy and quick installation
- 5 years guarantee

PRODUCT FEATURES

- Advanced applications with DALI light installations
- Initial color consistency: ≤ 4 SDCM
- Housing material: aluminum
- Lens material: PMMA





TECHNICAL DATA

Product description	Electrical data			Photometrical data			Light technical data	Dimensions & weight			
	Nominal wattage	Nominal voltage	Mains frequency	Luminous flux	Light color (designation)	Color rendering index Ra	Beam angle	Diameter	Height	Product weight	Mounting diameter
SPOT ADJUST DALI 8 W 3000 K IP20 WT	8.00 W	220...240 V	50/60 Hz	660 lm	Warm White	>80	36 °	90.0 mm	47.0 mm	319.00 g	83 mm
SPOT ADJUST DALI 8 W 4000 K IP20 WT	8.00 W	220...240 V	50/60 Hz	720 lm	Cool White	>80	36 °	90.0 mm	47.0 mm	319.00 g	83 mm


Product description	Colors & materials			Temperatures & operating conditions	Lifespan			
	Body material	Product color	Housing color	Ambient temperature range	Number of switching cycles	Lifespan L70/B50 at 25 °C	Lifespan L80/B10 at 25 °C	Lifespan L90/B10 at 25 °C
SPOT ADJUST DALI 8 W 3000 K IP20 WT	Aluminum	White	White	-20...+45 °C	100000	50000 h	40000 h	20000 h
SPOT ADJUST DALI 8 W 4000 K IP20 WT	Aluminum	White	White	-20...+45 °C	100000	50000 h	40000 h	20000 h

Product description	Capabilities			Certificates & standards	
	Adjustable	Dimmable	Type of connection	Protection class	Type of protection
SPOT ADJUST DALI 8 W 3000 K IP20 WT	Yes	Yes	Screw terminal, 2-Pole (L,N)	II	IP20
SPOT ADJUST DALI 8 W 4000 K IP20 WT	Yes	Yes	Screw terminal, 2-Pole (L,N)	II	IP20

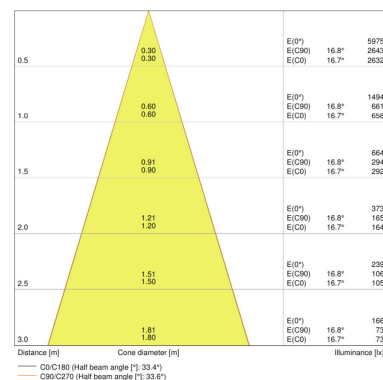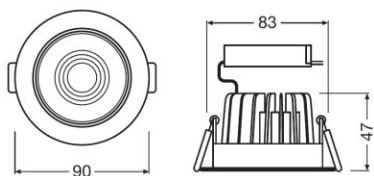

SPOT ADJUST DALI 8 W 3000 K IP20 WT, SPOT ADJUST DALI 8 W 4000 K IP20 WT

SPOT ADJUST DALI 8 W 3000 K IP20 WT

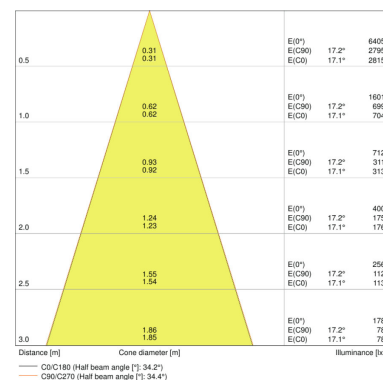

SPOT ADJUST DALI 8 W 4000 K IP20 WT

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075219953	Shipping carton box 10	614 mm x 248 mm x 273 mm	3516.00 g	41.57 dm ³
4058075219939	Shipping carton box 10	614 mm x 248 mm x 273 mm	3516.00 g	41.57 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.