

PRODUCT FAMILY DATASHEET

PARATHOM STICK

LED lamps, classic stick shape



AREAS OF APPLICATION

- All domestic rooms, especially where the lamps are visible
- Wherever compact and efficient lamps are needed
- Outdoor use in outdoor luminaires only (minimum IP65)

PRODUCT BENEFITS

- Low energy consumption
- Attractive lamp appearance
- Instant 100 % light, no warm-up time

PRODUCT FEATURES

- LED alternative to conventional lamps
- Lifetime: up to 15,000 h
- Not dimmable
- Good quality of light; color rendering index $R_a \geq 80$; constant chromaticity




TECHNICAL DATA

Product description	Electrical data				Photometrical data				
	Nominal wattage	Nominal voltage	Max. lamp no. on circuit break. 10 A (B)	Max. lamp no. on circuit break. 16 A (B)	Nominal luminous flux	Rated luminous flux	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature
P STICK 60 FR 8 W/2700K E27 ¹⁾	8.00 W	220...240 V	172	275	806 lm	806 lm	0.70	Warm White	2700 K
P STICK 60 FR 8 W/4000K E27 ¹⁾	8.00 W	220...240 V	172	275	806 lm	806 lm	0.70	Cool White	4000 K
P STICK 75 FR 10 W/2700K E27 ¹⁾	10.00 W	220...240 V	135	216	1050 lm	1050 lm	0.70	Warm White	2700 K
P STICK 75 FR 10 W/4000K E27 ¹⁾	10.00 W	220...240 V	135	216	1050 lm	1050 lm	0.70	Cool White	4000 K

Product description	Luminous flux	Color rendering index Ra	Light technical data	Dimensions & weight		Temperatures & operating conditions	Lifespan		Additional product data
			Warm-up time (60 %)	Overall length	Diameter	Ambient temperature range	Nominal lamp life time	Number of switching cycles	Base (standard designation)
P STICK 60 FR 8 W/2700K E27 ¹⁾	806 lm	≥80	< 0.50 s	115.0 mm	40.4 mm	-20...+40 °C	15000 h	100000	E27
P STICK 60 FR 8 W/4000K E27 ¹⁾	806 lm	≥80	< 0.50 s	114.0 mm	40.4 mm	-20...+40 °C	15000 h	100000	E27
P STICK 75 FR 10 W/2700K E27 ¹⁾	1050 lm	≥80	< 0.50 s	115.0 mm	40.4 mm	-20...+40 °C	15000 h	100000	E27
P STICK 75 FR 10 W/4000K E27 ¹⁾	1050 lm	≥80	< 0.50 s	115.0 mm	40.4 mm	-20...+40 °C	15000 h	100000	E27

Product description	Mercury content	Mercury-free	Capabilities	Certificates & standards	
			Dimmable	Energy efficiency class	Energy consumption
P STICK 60 FR 8 W/2700K E27 ¹⁾	0.0 mg	Yes	No	A+	8 kWh/1000h
P STICK 60 FR 8 W/4000K E27 ¹⁾	0.0 mg	Yes	No	A+	8 kWh/1000h
P STICK 75 FR 10 W/2700K E27 ¹⁾	0.0 mg	Yes	No	A+	10 kWh/1000h
P STICK 75 FR 10 W/4000K E27 ¹⁾	0.0 mg	Yes	No	A+	10 kWh/1000h

¹⁾ All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

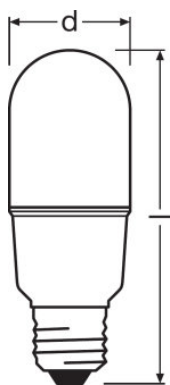

P STICK 60 FR 8 W/2700K E27, P STICK
60 FR 8 W/4000K E27, P STICK 75 FR 10
W/2700K E27, P STICK 75 FR 10
W/4000K E27

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075292642	Shipping carton box 10	218 mm x 92 mm x 132 mm	442.00 g	2.65 dm ³
4058075292666	Shipping carton box 10	218 mm x 92 mm x 132 mm	498.00 g	2.65 dm ³
4058075292680	Shipping carton box 10	218 mm x 92 mm x 132 mm	443.00 g	2.65 dm ³
4058075292703	Shipping carton box 10	218 mm x 92 mm x 132 mm	445.00 g	2.65 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
--------------	------------------------------	--------------------------------------	--------------	--------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.