

# PRODUCT FAMILY DATASHEET PARATHOM CLASSIC A FACILITY

Professional LED Lamps with added function



---

## AREAS OF APPLICATION

- Wherever light is required quickly
- Hotels, restaurants
- Outdoor applications only in suitable luminaires

---

## PRODUCT BENEFITS

- Light also during power outages thanks to backup battery
- Very long lifetime of up to 25,000 h
- Instant 100 % light, no warm-up time
- Variable use at Direct Current, Alternating Current or battery voltage

---

## PRODUCT FEATURES

- Operating time on battery power: up to 2 h (100 lm)
- Battery charging time: 4 h
- Battery technology: lithium-ion
- Battery charges while the lamp is powered by the mains
- Battery integrated and not interchangeable




**TECHNICAL DATA**


Product description	Electrical data		Photometrical data					Dimensions & weight	Temperatures & operating conditions
	Nominal wattage	Nominal voltage	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature	Luminous flux	Color rendering index Ra	Overall length	Ambient temperature range
P CLAS A 60 8.5 W/2700K E27 <sup>1)</sup>	8.50 W	220...240 V	0.70	Warm White	2700 K	806 lm	≥80	142.0 mm	-20...+40 °C
P CLAS A 75 9.5 W/2700K E27 <sup>1)</sup>	9.50 W	220...240 V	0.70	Warm White	2700 K	1055 lm	≥80	142.0 mm	-20...+40 °C

Product description	Lifespan		Additional product data		Capabilities	Certificates & standards
	Nominal lamp life time	Number of switching cycles	Base (standard designation)	Mercury-free	Dimmable	Energy efficiency class
P CLAS A 60 8.5 W/2700K E27 <sup>1)</sup>	25000 h	100000	E27	Yes	No	A+
P CLAS A 75 9.5 W/2700K E27 <sup>1)</sup>	25000 h	100000	E27	Yes	No	A+


— <sup>1)</sup> All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

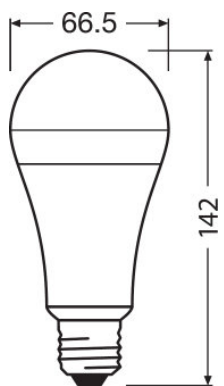


P CLAS A 60 8.5 W/2700K E27

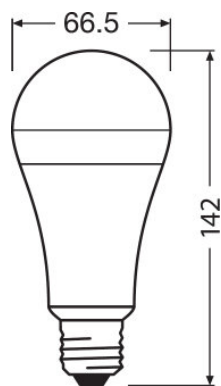

P CLAS A 75 9.5 W/2700K E27

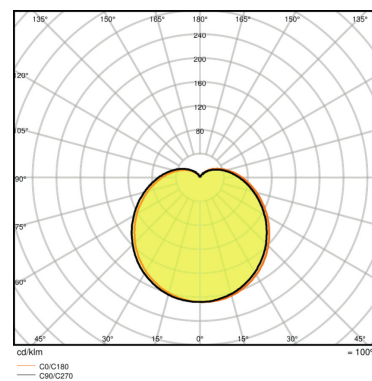

P CLAS A 60 8.5 W/2700K E27

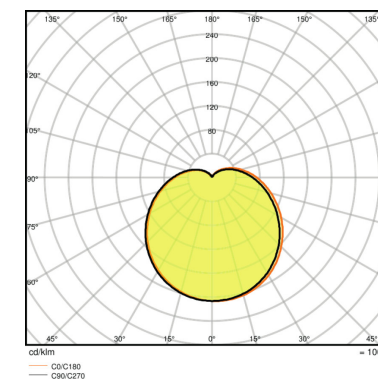

P CLAS A 75 9.5 W/2700K E27

**APPLICATION ADVICE**

For more detailed application information and graphics please see product datasheet.

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075125872	Shipping carton box 10	315 mm x 131 mm x 126 mm	1133.00 g	5.20 dm <sup>3</sup>
4058075125896	Shipping carton box 10	315 mm x 131 mm x 126 mm	1133.00 g	5.20 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.