

PRODUCT FAMILY DATASHEET

LED DRIVER VALUE

Constant voltage LED driver



AREAS OF APPLICATION

- Cove lighting, even in tight spaces
- Wallwasher effect lighting in living rooms, dining rooms, bedrooms, entrances
- For indoor SELV installations
- Offices, shopping centers, hospitals, restaurants, hotels

PRODUCT BENEFITS

- Perfectly matched to 24 V LED flexible strips
- Excellent price/performance ratio
- 3 years guarantee
- Quick and simple installation
- Good efficiency and reliability

PRODUCT FEATURES

- Available in 30 W, 60 W, 120 W and 150 W
- Integrated cable clamp for independent installation
- Lifetime: up to 35,000 h (at max. tc temperature)
- Type of protection: IP20
- Low ripple current < 5%
- Supply voltage: 220...240 V
- Operating frequency: 50/60 Hz
- Operated with less than 60 V: Safety extra-low voltage (SELV)
- Reversible overtemperature, overload, short-circuit and open-circuit protection

TECHNICAL DATA

Electrical data

Product description	Nominal voltage	Mains frequency	Input voltage AC	Power factor λ	ECG efficiency	Device power loss	Inrush current
DR-VAL -30/220-240/24	220...240 V	50/60 Hz	198...264 V ¹⁾	0.90 ²⁾	87 % ³⁾	3.9 W ⁴⁾	20 A ⁵⁾
DR-VAL -60/220-240/24	220...240 V	50/60 Hz	198...264 V ¹⁾	0.90 ²⁾	87 % ³⁾	7.8 W ⁸⁾	45 A ⁵⁾
DR-VAL -120/220-240/24	220...240 V	50/60 Hz	198...264 V ¹⁾	0.90 ²⁾	90 % ³⁾	12 W ¹⁰⁾	62 A ⁵⁾
DR-VAL -150/220-240/24	220...240 V	50/60 Hz	198...264 V ¹⁾	0.90 ²⁾	87 % ³⁾	19.5 W ¹²⁾	90 A ⁵⁾

Product description	Max. ECG no. on circuit breaker 10 A (B)	Max. ECG no. on circuit breaker 16 A (B)	Max. ECG no. on circuit breaker 25 A (B)	Surge capability (L-N)	Nominal output voltage
DR-VAL -30/220-240/24	10	16	25	1 kV	24 V ⁶⁾
DR-VAL -60/220-240/24	6	11	17	1 kV	24 V ⁶⁾
DR-VAL -120/220-240/24	4	7	10	1 kV	24 V ⁶⁾
DR-VAL -150/220-240/24	17	28	43	1 kV	24 V ⁶⁾

Product description	Nominal output power	Galvanic isolation primary/secondary
DR-VAL -30/220-240/24	30 W ⁷⁾	3.75 kV
DR-VAL -60/220-240/24	60 W ⁹⁾	3.75 kV
DR-VAL -120/220-240/24	120 W ¹¹⁾	3.75 kV
DR-VAL -150/220-240/24	150 W ¹³⁾	3.75 kV

¹⁾ Permitted voltage range

²⁾ Full load at 230 V

³⁾ At full load and 230 V

⁴⁾ At maximum LED load of 30 W

⁵⁾ $t_{width} = 250 \mu s$ (measured at 50 % I_{peak})

⁶⁾ Maximum 24 V

⁷⁾ From 0 to 30 W

⁸⁾ At maximum LED load of 60 W

⁹⁾ From 0 to 60 W

¹⁰⁾ At maximum LED load of 120 W

¹¹⁾ From 0 to 120 W

¹²⁾ At maximum LED load of 150 W

¹³⁾ From 0 to 150 W


Dimensions & weight

Product description	Length	Width	Height	Mounting hole spacing, length	Mounting hole spacing, width	Cable cross-section, input side
DR-VAL -30/220-240/24	142.0 mm	45.0 mm	30.0 mm	132.0 mm	35.0 mm	0.5...1.5 mm ²
DR-VAL -60/220-240/24	170.0 mm	45.0 mm	30.0 mm	162.0 mm	37.0 mm	0.5...1.5 mm ²
DR-VAL -120/220-240/24	255.0 mm	45.0 mm	32.0 mm	244.5 mm	36.1 mm	0.5...1.5 mm ²
DR-VAL -150/220-240/24	255.0 mm	45.0 mm	32.0 mm	244.5 mm	36.1 mm	0.5...1.5 mm ²


Product description	Cable cross-section, output side	Product weight	Wire preparation length, input side	Wire preparation length, output side
DR-VAL -30/220-240/24	0.5...1.5 mm ²	130.00 g	5...6 mm	5...6 mm
DR-VAL -60/220-240/24	0.5...1.5 mm ²	170.00 g	5...6 mm	5...6 mm
DR-VAL -120/220-240/24	0.5...1.5 mm ²	406.00 g	5...6 mm	5...6 mm
DR-VAL -150/220-240/24	0.5...1.5 mm ²	407.00 g	5...6 mm	5...6 mm

Product description	Prewired
DR-VAL -30/220-240/24	No
DR-VAL -60/220-240/24	No
DR-VAL -120/220-240/24	No
DR-VAL -150/220-240/24	No



Product line drawing

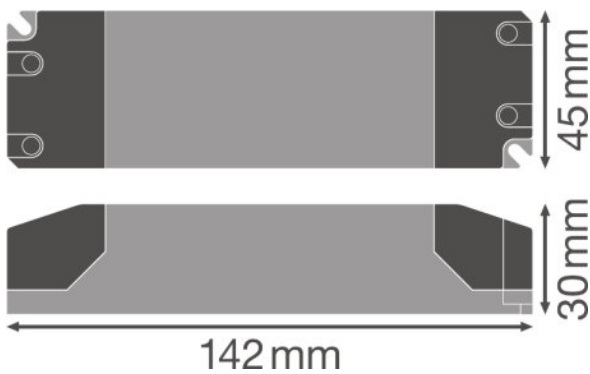

DR-VAL -30/220-240/24

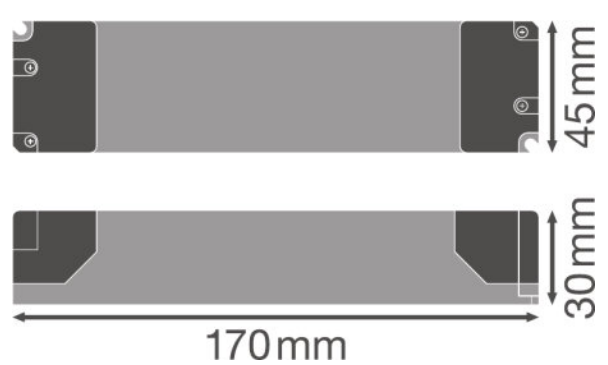

DR-VAL -60/220-240/24

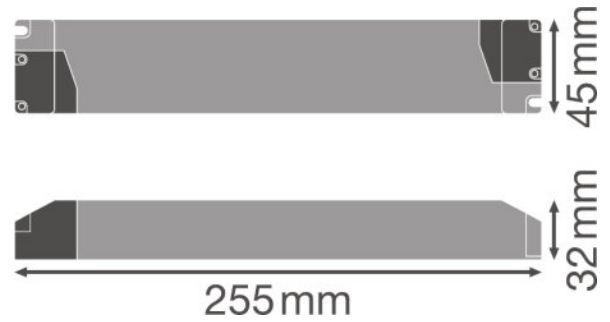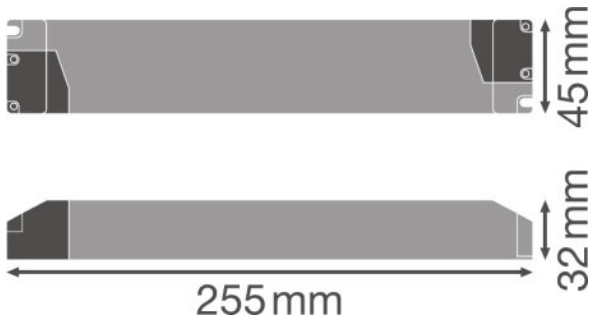

DR-VAL -120/220-240/24

DR-VAL -150/220-240/24

Colors & materials

Product description	Casing material
DR-VAL -30/220-240/24	Plastic
DR-VAL -60/220-240/24	Plastic
DR-VAL -120/220-240/24	Plastic
DR-VAL -150/220-240/24	Plastic

Temperatures & operating conditions

Product description	Maximum temperature at tc test point	Max.housing temperature in case of fault
DR-VAL -30/220-240/24	85 °C	95 °C
DR-VAL -60/220-240/24	85 °C	95 °C
DR-VAL -120/220-240/24	90 °C	95 °C
DR-VAL -150/220-240/24	90 °C	95 °C

Lifespan

Product description	ECG lifetime
DR-VAL -30/220-240/24	35000 h ¹⁾
DR-VAL -60/220-240/24	35000 h ¹⁾
DR-VAL -120/220-240/24	35000 h ²⁾
DR-VAL -150/220-240/24	35000 h ³⁾

¹⁾ At maximum T_c = 85°C / 10% failure rate

²⁾ At maximum T_c = 90°C / 10% failure rate

³⁾ At maximum $T_c = 90^\circ\text{C}$ / 12% failure rate

Additional product data

Product description	Encapsulated
DR-VAL -30/220-240/24	No
DR-VAL -60/220-240/24	No
DR-VAL -120/220-240/24	No
DR-VAL -150/220-240/24	No

Capabilities

Product description	Overheating protection	Overload protection	Short-circuit protection	Max. cable length to lamp/LED module
DR-VAL -30/220-240/24	No	Yes	Yes	2.0 m
DR-VAL -60/220-240/24	No	Yes	Yes	2.0 m
DR-VAL -120/220-240/24	No	Yes	Yes	2.0 m
DR-VAL -150/220-240/24	No	Yes	Yes	2.0 m

Product description	Suitable for fixtures with prot. class
DR-VAL -30/220-240/24	I / II
DR-VAL -60/220-240/24	I / II
DR-VAL -120/220-240/24	I / II
DR-VAL -150/220-240/24	I / II

Certificates & standards

Product description	Standards	Type of protection
DR-VAL -30/220-240/24	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384	IP20
DR-VAL -60/220-240/24	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384	IP20
DR-VAL -120/220-240/24	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384	IP20
DR-VAL -150/220-240/24	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384	IP20

Logistical data

Product description	Temperature range at storage
DR-VAL -30/220-240/24	-20...+75 °C
DR-VAL -60/220-240/24	-20...+75 °C
DR-VAL -120/220-240/24	-20...+75 °C
DR-VAL -150/220-240/24	-20...+75 °C

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.







SALES AND TECHNICAL SUPPORT

Sales and Technical Support www.ledvance.com

COUNTRY SPECIFIC INFORMATION

Product description	Product code	METEL-Code	SEG number	STK number	UK Org
DR-VAL -30/220-240/24	4058075240056	-	7981940	4031411	-
DR-VAL -60/220-240/24	4058075240094	-	7981941	4031412	-
DR-VAL -120/220-240/24	4058075240131	-	7981942	4031413	-
DR-VAL -150/220-240/24	4058075240179	-	7981943	4031414	-

DOWNLOAD DATA

File
 User instruction LED DRIVER VALUE CV INDOOR
 Product Datasheet DR-VAL-30220-24024
 Declarations of conformity EU Declaration of Conformity 3581723
 Product Datasheet DR-VAL-60220-24024
 Product Datasheet DR-VAL-120220-24024
 Product Datasheet DR-VAL-150220-24024

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075240063	Shipping carton box 10	264 mm x 165 mm x 108 mm	1601.00 g	4.70 dm ³
4058075240100	Shipping carton box 10	264 mm x 192 mm x 108 mm	2051.00 g	5.47 dm ³
4058075240148	Shipping carton box 10	304 mm x 288 mm x 128 mm	5396.00 g	11.21 dm ³
4058075240186	Shipping carton box 10	304 mm x 288 mm x 128 mm	5406.00 g	11.21 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
--------------	------------------------------	--------------------------------------	--------------	--------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ACCESSORIES MANDATORY

Product description	Accessory name	Accessory code
DR-VAL -60/220-240/24	LED STRIP VALUE-300, -300/827/5	▶ 4058075296077
DR-VAL -60/220-240/24	LED STRIP VALUE-300, -300/830/5	▶ 4058075296107

ACCESSORIES OPTIONAL

Product description	Accessory name	Accessory code
DR-VAL -30/220-240/24	LED STRIP SUPERIOR-500, -500/927/5	▶ 4058075237056
DR-VAL -30/220-240/24	LED STRIP SUPERIOR-500, -500/930/5	▶ 4058075237070
DR-VAL -30/220-240/24	LED STRIP SUPERIOR-500, -500/940/5	▶ 4058075237094
DR-VAL -30/220-240/24	LED STRIP SUPERIOR-500, -500/965/5	▶ 4058075237117
DR-VAL -30/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/927/5/IP67	▶ 4058075237278
DR-VAL -30/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/930/5/IP67	▶ 4058075237292
DR-VAL -30/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/940/5/IP67	▶ 4058075237339
DR-VAL -30/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/960/5/IP67	▶ 4058075237353
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-300, -300/827/5	▶ 4058075236394
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-300, -300/830/5	▶ 4058075236431
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-300, -300/840/5	▶ 4058075236530
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-300, -300/865/5	▶ 4058075236592
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-600, -600/827/5	▶ 4058075236417
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-600, -600/830/5	▶ 4058075236455
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-600, -600/840/5	▶ 4058075236493
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-600, -600/865/5	▶ 4058075236554
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/827/5/IP66	▶ 4058075236639
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/830/5/IP66	▶ 4058075236677
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/840/5/IP66	▶ 4058075236813
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/865/5/IP66	▶ 4058075236714
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/827/5/IP66	▶ 4058075236950
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/830/5/IP66	▶ 4058075236974
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/840/5/IP66	▶ 4058075236998
DR-VAL -30/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/865/5/IP66	▶ 4058075237018
DR-VAL -30/220-240/24	LED STRIP VALUE-300, -300/827/5	▶ 4058075296077
DR-VAL -30/220-240/24	LED STRIP VALUE-300, -300/830/5	▶ 4058075296107
DR-VAL -30/220-240/24	LED STRIP VALUE-300, -300/840/5	▶ 4058075296138

DR-VAL -30/220-240/24	LED STRIP VALUE-300, -300/865/5	▶ 4058075296169
DR-VAL -30/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/827/5/IP65	▶ 4058075296190
DR-VAL -30/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/830/5/IP65	▶ 4058075296220
DR-VAL -30/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/840/5/IP65	▶ 4058075296251
DR-VAL -30/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/865/5/IP65	▶ 4058075296282
DR-VAL -30/220-240/24	LED STRIP VALUE-600, -600/827/5	▶ 4058075296671
DR-VAL -30/220-240/24	LED STRIP VALUE-600, -600/830/5	▶ 4058075296794
DR-VAL -30/220-240/24	LED STRIP VALUE-600, -600/840/5	▶ 4058075296947
DR-VAL -30/220-240/24	LED STRIP VALUE-600, -600/865/5	▶ 4058075297005
DR-VAL -30/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/827/5/IP65	▶ 4058075296558
DR-VAL -30/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/830/5/IP65	▶ 4058075296589
DR-VAL -30/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/840/5/IP65	▶ 4058075296619
DR-VAL -30/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/865/5/IP65	▶ 4058075296640
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-500, -500/927/5	▶ 4058075237056
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-500, -500/930/5	▶ 4058075237070
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-500, -500/940/5	▶ 4058075237094
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-500, -500/965/5	▶ 4058075237117
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-800, -800/927/5	▶ 4058075237193
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-800, -800/930/5	▶ 4058075237230
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-800, -800/940/5	▶ 4058075237254
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-800, -800/965/5	▶ 4058075237315
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/927/5/IP67	▶ 4058075237278
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/930/5/IP67	▶ 4058075237292
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/940/5/IP67	▶ 4058075237339
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/960/5/IP67	▶ 4058075237353
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-800 PROTECTED, -800/927/5/IP67	▶ 4058075237377
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-800 PROTECTED, -800/930/5/IP67	▶ 4058075237391
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-800 PROTECTED, -800/940/5/IP67	▶ 4058075237414
DR-VAL -60/220-240/24	LED STRIP SUPERIOR-800 PROTECTED, -800/960/5/IP67	▶ 4058075237438
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-300, -300/827/5	▶ 4058075236394
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-300, -300/830/5	▶ 4058075236431
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-300, -300/840/5	▶ 4058075236530
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-300, -300/865/5	▶ 4058075236592
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-600, -600/827/5	▶ 4058075236417
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-600, -600/830/5	▶ 4058075236455
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-600, -600/840/5	▶ 4058075236493
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-600, -600/865/5	▶ 4058075236554
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1000, -1000/827/5	▶ 4058075235977
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1000, -1000/830/5	▶ 4058075235991

DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1000, -1000/840/5	▶ 4058075236011
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1000, -1000/865/5	▶ 4058075236035
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1500, -1500/827/5	▶ 4058075236158
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1500, -1500/830/5	▶ 4058075236233
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1500, -1500/840/5	▶ 4058075236257
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1500, -1500/865/5	▶ 4058075236271
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/827/5/IP66	▶ 4058075236639
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/830/5/IP66	▶ 4058075236677
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/840/5/IP66	▶ 4058075236813
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/865/5/IP66	▶ 4058075236714
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/827/5/IP66	▶ 4058075236950
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/830/5/IP66	▶ 4058075236974
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/840/5/IP66	▶ 4058075236998
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/865/5/IP66	▶ 4058075237018
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1000 PROTECTED, -1000/827/5/IP66	▶ 4058075236059
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1000 PROTECTED, -1000/840/5/IP66	▶ 4058075236097
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1000 PROTECTED, -1000/830/5/IP66	▶ 4058075236073
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1000 PROTECTED, -1000/865/5/IP66	▶ 4058075236110
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1500 PROTECTED, -1500/827/5/IP66	▶ 4058075236318
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1500 PROTECTED, -1500/830/5/IP66	▶ 4058075236332
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1500 PROTECTED, -1500/840/5/IP66	▶ 4058075236356
DR-VAL -60/220-240/24	LED STRIP PERFORMANCE-1500 PROTECTED, -1500/865/5/IP66	▶ 4058075236370
DR-VAL -60/220-240/24	LED STRIP VALUE-300, -300/840/5	▶ 4058075296138
DR-VAL -60/220-240/24	LED STRIP VALUE-300, -300/865/5	▶ 4058075296169
DR-VAL -60/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/827/5/IP65	▶ 4058075296190
DR-VAL -60/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/830/5/IP65	▶ 4058075296220
DR-VAL -60/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/840/5/IP65	▶ 4058075296251
DR-VAL -60/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/865/5/IP65	▶ 4058075296282
DR-VAL -60/220-240/24	LED STRIP VALUE-600, -600/827/5	▶ 4058075296671
DR-VAL -60/220-240/24	LED STRIP VALUE-600, -600/830/5	▶ 4058075296794
DR-VAL -60/220-240/24	LED STRIP VALUE-600, -600/840/5	▶ 4058075296947
DR-VAL -60/220-240/24	LED STRIP VALUE-600, -600/865/5	▶ 4058075297005
DR-VAL -60/220-240/24	LED STRIP VALUE-1000, -1000/865/5	▶ 4058075296404
DR-VAL -60/220-240/24	LED STRIP VALUE-1000 PROTECTED, -1000/827/5/IP65	▶ 4058075296435
DR-VAL -60/220-240/24	LED STRIP VALUE-1000 PROTECTED, -1000/830/5/IP65	▶ 4058075296466
DR-VAL -60/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/827/5/IP65	▶ 4058075296558
DR-VAL -60/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/830/5/IP65	▶ 4058075296589
DR-VAL -60/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/840/5/IP65	▶ 4058075296619
DR-VAL -60/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/865/5/IP65	▶ 4058075296640

DR-VAL -60/220-240/24	LED STRIP VALUE-1000, -1000/827/5	▶ 4058075296312
DR-VAL -60/220-240/24	LED STRIP VALUE-1000, -1000/830/5	▶ 4058075296343
DR-VAL -60/220-240/24	LED STRIP VALUE-1000, -1000/840/5	▶ 4058075296374
DR-VAL -60/220-240/24	LED STRIP VALUE-1000 PROTECTED, -1000/840/5/IP65	▶ 4058075296497
DR-VAL -60/220-240/24	LED STRIP VALUE-1000 PROTECTED, -1000/865/5/IP65	▶ 4058075296527
DR-VAL -60/220-240/24	LED STRIP VALUE-1400 PROTECTED, -1400/827/5/IP65	▶ 4058075296701
DR-VAL -60/220-240/24	LED STRIP VALUE-1400 PROTECTED, -1400/830/5/IP65	▶ 4058075296732
DR-VAL -60/220-240/24	LED STRIP VALUE-1400 PROTECTED, -1400/840/5/IP65	▶ 4058075296763
DR-VAL -60/220-240/24	LED STRIP VALUE-1400 PROTECTED, -1400/865/5/IP65	▶ 4058075296824
DR-VAL -60/220-240/24	LED STRIP VALUE-1400, -1400/827/5	▶ 4058075296855
DR-VAL -60/220-240/24	LED STRIP VALUE-1400, -1400/830/5	▶ 4058075296886
DR-VAL -60/220-240/24	LED STRIP VALUE-1400, -1400/840/5	▶ 4058075296916
DR-VAL -60/220-240/24	LED STRIP VALUE-1400, -1400/865/5	▶ 4058075296978
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-500, -500/927/5	▶ 4058075237056
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-500, -500/930/5	▶ 4058075237070
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-500, -500/940/5	▶ 4058075237094
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-500, -500/965/5	▶ 4058075237117
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-800, -800/927/5	▶ 4058075237193
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-800, -800/930/5	▶ 4058075237230
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-800, -800/940/5	▶ 4058075237254
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-800, -800/965/5	▶ 4058075237315
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-1200, -1200/927/5	▶ 4058075236653
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-1200, -1200/930/5	▶ 4058075236691
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-1200, -1200/940/5	▶ 4058075236738
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-1200, -1200/965/5	▶ 4058075236752
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-2000, -2000/927/3.5	▶ 4058075236776
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-2000, -2000/930/3.5	▶ 4058075236899
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-2000, -2000/940/3.5	▶ 4058075236912
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-2000, -2000/965/3.5	▶ 4058075236936
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/927/5/IP67	▶ 4058075237278
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/930/5/IP67	▶ 4058075237292
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/940/5/IP67	▶ 4058075237339
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/960/5/IP67	▶ 4058075237353
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-800 PROTECTED, -800/927/5/IP67	▶ 4058075237377
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-800 PROTECTED, -800/930/5/IP67	▶ 4058075237391
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-800 PROTECTED, -800/940/5/IP67	▶ 4058075237414
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-800 PROTECTED, -800/960/5/IP67	▶ 4058075237438
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-1200 PROTECTED, -1200/927/5/IP67	▶ 4058075236790
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-1200 PROTECTED, -1200/930/5/IP67	▶ 4058075236837

DR-VAL -120/220-240/24	LED STRIP SUPERIOR-1200 PROTECTED, -1200/940/5/IP67	▶ 4058075236851
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-1200 PROTECTED, -1200/960/5/IP67	▶ 4058075236875
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-2000 PROTECTED, -2000/927/3.5/IP67	▶ 4058075237131
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-2000 PROTECTED, -2000/930/3.5/IP67	▶ 4058075237155
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-2000 PROTECTED, -2000/940/3.5/IP67	▶ 4058075237179
DR-VAL -120/220-240/24	LED STRIP SUPERIOR-2000 PROTECTED, -2000/960/3.5/IP67	▶ 4058075237216
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-300, -300/827/5	▶ 4058075236394
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-300, -300/830/5	▶ 4058075236431
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-300, -300/840/5	▶ 4058075236530
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-300, -300/865/5	▶ 4058075236592
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-600, -600/827/5	▶ 4058075236417
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-600, -600/830/5	▶ 4058075236455
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-600, -600/840/5	▶ 4058075236493
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-600, -600/865/5	▶ 4058075236554
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1000, -1000/827/5	▶ 4058075235977
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1000, -1000/830/5	▶ 4058075235991
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1000, -1000/840/5	▶ 4058075236011
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1000, -1000/865/5	▶ 4058075236035
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1500, -1500/827/5	▶ 4058075236158
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1500, -1500/830/5	▶ 4058075236233
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1500, -1500/840/5	▶ 4058075236257
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1500, -1500/865/5	▶ 4058075236271
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-2000, -2000/827/5	▶ 4058075236134
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-2000, -2000/830/5	▶ 4058075236172
DR-VAL -120/220-240/24	LED STRIP VALUE-300, -300/827/5	▶ 4058075296077
DR-VAL -120/220-240/24	LED STRIP VALUE-300, -300/830/5	▶ 4058075296107
DR-VAL -120/220-240/24	LED STRIP VALUE-300, -300/840/5	▶ 4058075296138
DR-VAL -120/220-240/24	LED STRIP VALUE-300, -300/865/5	▶ 4058075296169
DR-VAL -120/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/827/5/IP65	▶ 4058075296190
DR-VAL -120/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/830/5/IP65	▶ 4058075296220
DR-VAL -120/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/840/5/IP65	▶ 4058075296251
DR-VAL -120/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/865/5/IP65	▶ 4058075296282
DR-VAL -120/220-240/24	LED STRIP VALUE-600, -600/827/5	▶ 4058075296671
DR-VAL -120/220-240/24	LED STRIP VALUE-600, -600/830/5	▶ 4058075296794
DR-VAL -120/220-240/24	LED STRIP VALUE-600, -600/840/5	▶ 4058075296947
DR-VAL -120/220-240/24	LED STRIP VALUE-600, -600/865/5	▶ 4058075297005
DR-VAL -120/220-240/24	LED STRIP VALUE-1000, -1000/865/5	▶ 4058075296404
DR-VAL -120/220-240/24	LED STRIP VALUE-1000 PROTECTED, -1000/827/5/IP65	▶ 4058075296435
DR-VAL -120/220-240/24	LED STRIP VALUE-1000 PROTECTED, -1000/830/5/IP65	▶ 4058075296466

DR-VAL -120/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/827/5/IP65	▶ 4058075296558
DR-VAL -120/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/830/5/IP65	▶ 4058075296589
DR-VAL -120/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/840/5/IP65	▶ 4058075296619
DR-VAL -120/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/865/5/IP65	▶ 4058075296640
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-2000, -2000/840/5	▶ 4058075236196
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-2000, -2000/865/5	▶ 4058075236219
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/827/5/IP66	▶ 4058075236639
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/830/5/IP66	▶ 4058075236677
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/840/5/IP66	▶ 4058075236813
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/865/5/IP66	▶ 4058075236714
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/827/5/IP66	▶ 4058075236950
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/830/5/IP66	▶ 4058075236974
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/840/5/IP66	▶ 4058075236998
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/865/5/IP66	▶ 4058075237018
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1000 PROTECTED, -1000/827/5/IP66	▶ 4058075236059
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1000 PROTECTED, -1000/840/5/IP66	▶ 4058075236097
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1000 PROTECTED, -1000/830/5/IP66	▶ 4058075236073
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1000 PROTECTED, -1000/865/5/IP66	▶ 4058075236110
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1500 PROTECTED, -1500/827/5/IP66	▶ 4058075236318
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1500 PROTECTED, -1500/830/5/IP66	▶ 4058075236332
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1500 PROTECTED, -1500/840/5/IP66	▶ 4058075236356
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-1500 PROTECTED, -1500/865/5/IP66	▶ 4058075236370
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-2000 PROTECTED, -2000/827/5/IP66	▶ 4058075236479
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-2000 PROTECTED, -2000/830/5/IP66	▶ 4058075236516
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-2000 PROTECTED, -2000/840/5/IP66	▶ 4058075236578
DR-VAL -120/220-240/24	LED STRIP PERFORMANCE-2000 PROTECTED, -2000/865/5/IP66	▶ 4058075236615
DR-VAL -120/220-240/24	LED STRIP VALUE-1000, -1000/827/5	▶ 4058075296312
DR-VAL -120/220-240/24	LED STRIP VALUE-1000, -1000/830/5	▶ 4058075296343
DR-VAL -120/220-240/24	LED STRIP VALUE-1000, -1000/840/5	▶ 4058075296374
DR-VAL -120/220-240/24	LED STRIP VALUE-1000 PROTECTED, -1000/840/5/IP65	▶ 4058075296497
DR-VAL -120/220-240/24	LED STRIP VALUE-1000 PROTECTED, -1000/865/5/IP65	▶ 4058075296527
DR-VAL -120/220-240/24	LED STRIP VALUE-1400 PROTECTED, -1400/827/5/IP65	▶ 4058075296701
DR-VAL -120/220-240/24	LED STRIP VALUE-1400 PROTECTED, -1400/830/5/IP65	▶ 4058075296732
DR-VAL -120/220-240/24	LED STRIP VALUE-1400 PROTECTED, -1400/840/5/IP65	▶ 4058075296763
DR-VAL -120/220-240/24	LED STRIP VALUE-1400 PROTECTED, -1400/865/5/IP65	▶ 4058075296824
DR-VAL -120/220-240/24	LED STRIP VALUE-1400, -1400/827/5	▶ 4058075296855
DR-VAL -120/220-240/24	LED STRIP VALUE-1400, -1400/830/5	▶ 4058075296886
DR-VAL -120/220-240/24	LED STRIP VALUE-1400, -1400/840/5	▶ 4058075296916
DR-VAL -120/220-240/24	LED STRIP VALUE-1400, -1400/865/5	▶ 4058075296978

DR-VAL -150/220-240/24	LED STRIP SUPERIOR-500, -500/927/5	▶ 4058075237056
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-500, -500/930/5	▶ 4058075237070
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-500, -500/940/5	▶ 4058075237094
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-500, -500/965/5	▶ 4058075237117
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-800, -800/927/5	▶ 4058075237193
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-800, -800/930/5	▶ 4058075237230
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-800, -800/940/5	▶ 4058075237254
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-800, -800/965/5	▶ 4058075237315
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-1200, -1200/927/5	▶ 4058075236653
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-1200, -1200/930/5	▶ 4058075236691
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-1200, -1200/940/5	▶ 4058075236738
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-1200, -1200/965/5	▶ 4058075236752
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-2000, -2000/927/3.5	▶ 4058075236776
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-2000, -2000/930/3.5	▶ 4058075236899
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-2000, -2000/940/3.5	▶ 4058075236912
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-2000, -2000/965/3.5	▶ 4058075236936
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/927/5/IP67	▶ 4058075237278
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/930/5/IP67	▶ 4058075237292
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/940/5/IP67	▶ 4058075237339
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-500 PROTECTED, -500/960/5/IP67	▶ 4058075237353
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-800 PROTECTED, -800/927/5/IP67	▶ 4058075237377
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-800 PROTECTED, -800/930/5/IP67	▶ 4058075237391
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-800 PROTECTED, -800/940/5/IP67	▶ 4058075237414
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-800 PROTECTED, -800/960/5/IP67	▶ 4058075237438
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-1200 PROTECTED, -1200/927/5/IP67	▶ 4058075236790
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-1200 PROTECTED, -1200/930/5/IP67	▶ 4058075236837
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-1200 PROTECTED, -1200/940/5/IP67	▶ 4058075236851
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-1200 PROTECTED, -1200/960/5/IP67	▶ 4058075236875
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-2000 PROTECTED, -2000/927/3.5/IP67	▶ 4058075237131
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-2000 PROTECTED, -2000/930/3.5/IP67	▶ 4058075237155
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-2000 PROTECTED, -2000/940/3.5/IP67	▶ 4058075237179
DR-VAL -150/220-240/24	LED STRIP SUPERIOR-2000 PROTECTED, -2000/960/3.5/IP67	▶ 4058075237216
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-300, -300/827/5	▶ 4058075236394
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-300, -300/830/5	▶ 4058075236431
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-300, -300/840/5	▶ 4058075236530
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-300, -300/865/5	▶ 4058075236592
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-600, -600/827/5	▶ 4058075236417
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-600, -600/830/5	▶ 4058075236455
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-600, -600/840/5	▶ 4058075236493

DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-600, -600/865/5	▶ 4058075236554
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1000, -1000/827/5	▶ 4058075235977
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1000, -1000/830/5	▶ 4058075235991
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1000, -1000/840/5	▶ 4058075236011
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1000, -1000/865/5	▶ 4058075236035
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1500, -1500/827/5	▶ 4058075236158
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1500, -1500/830/5	▶ 4058075236233
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1500, -1500/840/5	▶ 4058075236257
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1500, -1500/865/5	▶ 4058075236271
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-2000, -2000/827/5	▶ 4058075236134
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-2000, -2000/830/5	▶ 4058075236172
DR-VAL -150/220-240/24	LED STRIP VALUE-300, -300/827/5	▶ 4058075296077
DR-VAL -150/220-240/24	LED STRIP VALUE-300, -300/830/5	▶ 4058075296107
DR-VAL -150/220-240/24	LED STRIP VALUE-300, -300/840/5	▶ 4058075296138
DR-VAL -150/220-240/24	LED STRIP VALUE-300, -300/865/5	▶ 4058075296169
DR-VAL -150/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/827/5/IP65	▶ 4058075296190
DR-VAL -150/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/830/5/IP65	▶ 4058075296220
DR-VAL -150/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/840/5/IP65	▶ 4058075296251
DR-VAL -150/220-240/24	LED STRIP VALUE-300 PROTECTED, -300/865/5/IP65	▶ 4058075296282
DR-VAL -150/220-240/24	LED STRIP VALUE-600, -600/827/5	▶ 4058075296671
DR-VAL -150/220-240/24	LED STRIP VALUE-600, -600/830/5	▶ 4058075296794
DR-VAL -150/220-240/24	LED STRIP VALUE-600, -600/840/5	▶ 4058075296947
DR-VAL -150/220-240/24	LED STRIP VALUE-600, -600/865/5	▶ 4058075297005
DR-VAL -150/220-240/24	LED STRIP VALUE-1000, -1000/865/5	▶ 4058075296404
DR-VAL -150/220-240/24	LED STRIP VALUE-1000 PROTECTED, -1000/827/5/IP65	▶ 4058075296435
DR-VAL -150/220-240/24	LED STRIP VALUE-1000 PROTECTED, -1000/830/5/IP65	▶ 4058075296466
DR-VAL -150/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/827/5/IP65	▶ 4058075296558
DR-VAL -150/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/830/5/IP65	▶ 4058075296589
DR-VAL -150/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/840/5/IP65	▶ 4058075296619
DR-VAL -150/220-240/24	LED STRIP VALUE-600 PROTECTED, -600/865/5/IP65	▶ 4058075296640
DR-VAL -150/220-240/24	LED STRIP VALUE-1000, -1000/827/5	▶ 4058075296312
DR-VAL -150/220-240/24	LED STRIP VALUE-1000, -1000/830/5	▶ 4058075296343
DR-VAL -150/220-240/24	LED STRIP VALUE-1000, -1000/840/5	▶ 4058075296374
DR-VAL -150/220-240/24	LED STRIP VALUE-1000 PROTECTED, -1000/840/5/IP65	▶ 4058075296497
DR-VAL -150/220-240/24	LED STRIP VALUE-1000 PROTECTED, -1000/865/5/IP65	▶ 4058075296527
DR-VAL -150/220-240/24	LED STRIP VALUE-1400 PROTECTED, -1400/827/5/IP65	▶ 4058075296701
DR-VAL -150/220-240/24	LED STRIP VALUE-1400 PROTECTED, -1400/830/5/IP65	▶ 4058075296732
DR-VAL -150/220-240/24	LED STRIP VALUE-1400 PROTECTED, -1400/840/5/IP65	▶ 4058075296763
DR-VAL -150/220-240/24	LED STRIP VALUE-1400, -1400/827/5	▶ 4058075296855

DR-VAL -150/220-240/24	LED STRIP VALUE-1400, -1400/830/5	▶ 4058075296886
DR-VAL -150/220-240/24	LED STRIP VALUE-1400, -1400/840/5	▶ 4058075296916
DR-VAL -150/220-240/24	LED STRIP VALUE-1400, -1400/865/5	▶ 4058075296978
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-2000, -2000/840/5	▶ 4058075236196
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-2000, -2000/865/5	▶ 4058075236219
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/827/5/IP66	▶ 4058075236639
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/830/5/IP66	▶ 4058075236677
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/840/5/IP66	▶ 4058075236813
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-300 PROTECTED, -300/865/5/IP66	▶ 4058075236714
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/827/5/IP66	▶ 4058075236950
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/830/5/IP66	▶ 4058075236974
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/840/5/IP66	▶ 4058075236998
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-600 PROTECTED, -600/865/5/IP66	▶ 4058075237018
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1000 PROTECTED, -1000/827/5/IP66	▶ 4058075236059
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1000 PROTECTED, -1000/840/5/IP66	▶ 4058075236097
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1000 PROTECTED, -1000/830/5/IP66	▶ 4058075236073
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1000 PROTECTED, -1000/865/5/IP66	▶ 4058075236110
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1500 PROTECTED, -1500/827/5/IP66	▶ 4058075236318
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1500 PROTECTED, -1500/830/5/IP66	▶ 4058075236332
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1500 PROTECTED, -1500/840/5/IP66	▶ 4058075236356
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-1500 PROTECTED, -1500/865/5/IP66	▶ 4058075236370
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-2000 PROTECTED, -2000/827/5/IP66	▶ 4058075236479
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-2000 PROTECTED, -2000/830/5/IP66	▶ 4058075236516
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-2000 PROTECTED, -2000/840/5/IP66	▶ 4058075236578
DR-VAL -150/220-240/24	LED STRIP PERFORMANCE-2000 PROTECTED, -2000/865/5/IP66	▶ 4058075236615

REFERENCES / LINKS

For Guarantee see

▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.